

Mono 20 P/L

Assembly and operating instructions

visplay

play it smart

These instructions facilitate the safe and effective use of the "Mono 20 P/L" product.

These instructions are part of the product and must be kept safely and in easy reach from the product at all times.

All persons who use or handle this product must have read these instructions. Observance of all the safety and handling instructions given in these instructions are a prerequisite for safe working.

The figures in these instructions serve for general understanding and may differ from the actual version.

All dimensions in these instructions are given in mm.

Quality assurance

All processes in our company are subject to a comprehensive management system, which conforms to the quality standard ISO 9001 and the environmental standard ISO 14001.

The management system is regularly inspected by the Zertifizierungs- und Umweltgutachter GmbH (BSI), which documents conformance to the standards by a certificate.

Copyright

These instructions are protected by copyright. Their use is permitted within the scope of use of the product. Any use over and above this is only permitted with the written approval of the manufacturer.

Our General Terms and Conditions of Sale and Supply are valid for all orders.

Table of Contents

1 Safety	3
1.1 Explanation of symbols	3
1.2 Intended use	3
1.3 Basic dangers	3
2 Product description	3
2.1 Overview.....	3
2.2 Brief description.....	3
2.3 Power supply.....	4
2.4 Scope of supply and accessories.....	4
3 Assembly.....	5
3.1 Unpacking	5
3.2 Requirements of installation location.....	5
3.3 Reinforcing of panels.....	5
3.4 Mounting.....	5
3.5 Visplay plug system.....	7
4 Operation.....	8
4.1 Attaching merchandise support.....	8
4.2 Removing merchandise support	8
4.3 Cleaning.....	8
5 Dismantling and disposal.....	9
5.1 Dismantling	9
5.2 Disposal.....	9
6 Technical data	9
6.1 Dimensions.....	9
6.2 Connection values	10
6.3 Load values.....	10

1 Safety

Read this manual before using the product for the first time and proceed accordingly. Keep this manual in a safe place for later use or to pass on to future owners.

1.1 Explanation of symbols

Warning notices are indicated in this manual as follows.

⚠ WARNING

A warning notice designated in this manner indicates a dangerous situation that could result in death or serious injury if it is not avoided.

NOTE

A warning notice designated in this manner indicates a potentially dangerous situation that could result in material damage or environmental damage if it is not avoided.

1.2 Intended use

The product is used exclusively for mounting merchandise supports, on which goods are presented. Merchandise supports permitted for this purpose are exclusively those that conform to the specification in these instructions.

In the event of misuse, there is the danger that the merchandise supports and the electrical devices will be damaged. This can result in injuries and damage to the product.

Area of implementation

The product may only be used in the commercial area.

Personnel

These instructions describe the assembly of the holder set as well as its handling and cleaning. Therefore these instructions must be handed on to the end user after assembly of the holder set.

The contents of the section on "Assembly" is directed at personnel, who undertake the assembly of the holder sets (e.g. shop fitters).

The contents of the section on "Handling" is directed at the end users (e.g. sales personnel, visual merchandisers).

1.3 Basic dangers

- > Use only approved accessories and electrical devices.
- > Comply with the permitted connection, maximum load and equipment values.
- > Do not lean any ladders against the merchandise supports.
- > Do not load the merchandise supports above the maximum load capacity.
- > Do not place any receptacles, from which fluids can escape, on the merchandise supports.
- > Keep moisture away from current conducting components.

2 Product description

2.1 Overview

Mono 20 P/L is a support system that can be selectively aligned for mounting display supports on which products are presented.

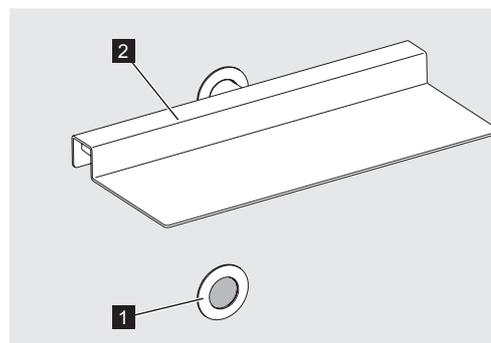


Fig. 1: Mono 20 P/L

2.2 Brief description

Contained in the electrified Mono 20 P/L holder set (Fig. 1/1) is a power element, through which low voltage power can flow. This allows the use of shelves (Fig. 1/2) with integrated light fittings for additional illumination of the positioned goods.

The merchandise supports must be obtained from the manufacturer. The electrical devices must conform to the specification given in these instructions. One merchandise support can be hung per holder set.

Holder sets

The holder sets serve for mounting of the merchandise support. They are available in the following versions:

- Mono 20 P/L holder set with power cable (Fig. 2/A)
- Mono 20 P/L holder set, non-electrified (Fig. 2/B)
- Mono 20 P/L light holder set with power cable (Fig. 2/C)
- Mono 20 P/L light holder set, non-electrified (Fig. 2/D)

NOTE

Non-electrified merchandise supports can be pushed into electrified holder sets without any problems.

For the holder set mounting in wood see section .

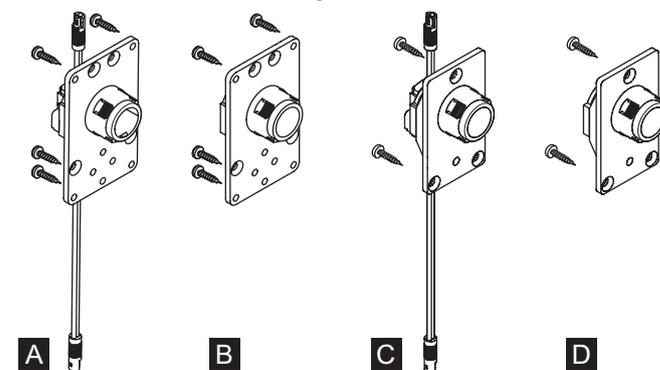


Fig. 2: Version of the various holder sets

2.3 Power supply

The 24 V distributor enables power supply to a maximum of 8 connections, each with a maximum of 2 converters of 75 W. The switched input enables the use of a switch.

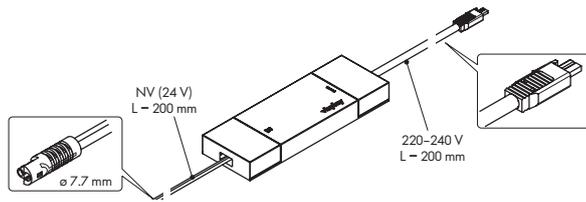


Fig. 3: Converter

NOTE

It is imperative to take account of power consumption of the electrical devices. The dimmer set 318-271.19 is required for the use of dimmers.

For an overview of the electrical connection of the holder sets and the associated components see the section on Electrification .

2.4 Scope of supply and accessories

2.4.1 Electrical connection set

The electrical connection set is a standard part of the electrified holder set. It serves for retrospective electrical connection of existing non-electrified Mono 20 P/L holder sets.

Included in the electrical connection set is the electrical connection with the power cable (Fig. 4/1) and 2 counter-sunk fixing screws M5 x 16 Torx (Fig. 4/2).

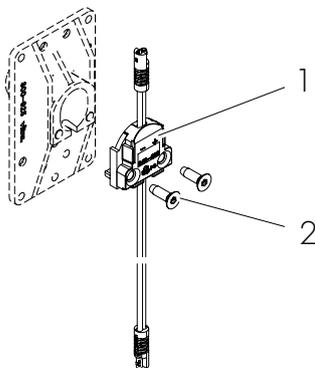


Fig. 4: Electrical connection set for non-electrified holder sets

For mounting the electrical connection set see section 3.4.2

2.4.2 Cover clip



Fig. 5: Cover clip

The cover clip must be ordered separately.

2.4.3 Merchandise supports

The merchandise supports are used for displaying goods. Merchandise supports can have different shapes.

Examples of merchandise supports available:

- Hanging arms, straight
- Shoe shelves
 - for a single shoe or a pair
 - electrified or non-electrified
- Mounting bracket for wooden or glass shelf
- Support bar in connection with mounting bracket
- Single support bar
- Universal bracket Drawing no.: 991-217 Wooden shelf 22 mm
- Pair of brackets Ø 20 mm 704-396 Wooden shelf

Further information on the individual merchandise supports as well as the specific product descriptions can be found in the product catalogue.

Mounting brackets and shelves

Mounting brackets are for mounting support bars or shelves.

Shelves are trays or racks made of wood or glass. Construction drawings for the shelves are available to download from the product section at www.visplay.com.

2.4.4 Hanger sets for wooden panels, etc.




Fig. 6: Hanger sets for wooden panels

Instead of merchandise supports, wooden panels and placards, etc., can be fixed in the holder set with a hanger set. This consists of hanger adapter (Fig. 6/1) and hanger bracket (Fig. 6/2).

- Maximum load: 20 kg

3 Assembly

⚠ WARNING

The system can fail if assembly is not carried out correctly or the base cannot support the necessary load. There is a danger of injury from goods or merchandise supports falling down.

- > Note and comply with all the following instructions on assembly.
- > Make sure that the base is suitable for the expected loads.

3.1 Unpacking

Immediately on receipt, check the delivery is complete and intact.

If transport damage is noted, proceed as follows:

- Do not accept delivery or only under reservation.
- Make a note of the extent of the damage on the transport documents or the delivery note of the transport company.
- Initiate a complaint.

Packaging

The product is securely packed so that transport damage is unlikely.

- Store original packaging for subsequent transport.
- Only send product in original packaging.
- Take note of all instructions which are given on the packaging.

Disposing of packaging materials

If the packaging materials are no longer required, dispose of them according to local disposal regulations.

3.2 Requirements of installation location

The installation location must comply with the following requirements:

- The installation location must be dry. Construction outdoors is not permitted.
- The base (walls, columns, etc.) must be designed for and able to support the loads to be borne.
- The base must be level in order that the holder sets are fully supported after mounting.

3.3 Reinforcing of panels

The panels, in which the holder sets are mounted, must be reinforced. Otherwise the panels, together with the mounted holder sets, may buckle and break.

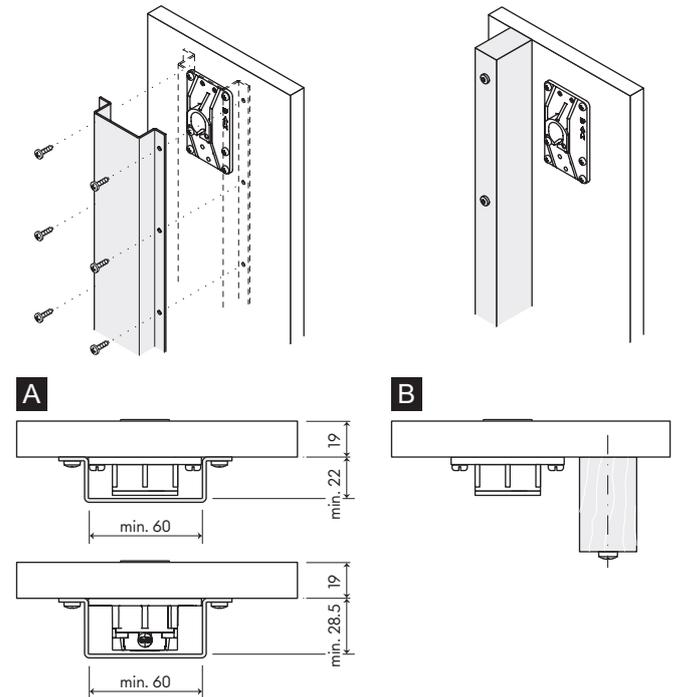


Fig. 7: Back panel reinforcement

Possible reinforcements:

- Angle sections (Fig. 7/A). Take note of the different heights of the holder sets (whether electrified or non-electrified).
- Wooden ribs (Fig. 7/B)
- Screw reinforcement on to the rear side of the panels and additionally glue wooden ribs. Make sure that the panels are supported evenly.

3.4 Mounting

⚠ WARNING

If fixing points are left out, the load carrying capacity of the holder sets provided for will not be achieved.

- > Use all fixing points of the holder sets.
- > Ensure the correct alignment of the holder sets.

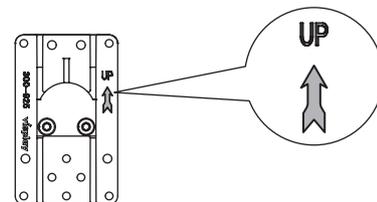


Fig. 8: Correct alignment of the holder sets

The fixing points, on which the holder sets are to be screwed, are prepared. The holder set is marked on the rear side with an arrow and the marking "UP" (Fig. 8).

3.4.1 Mounting holder set on wood

When using the fixings supplied, the holder set must only be mounted on wooden panels that are 19 mm thick. The holder sets can be used both with or without the cover clip. Pay attention to the different milled form.

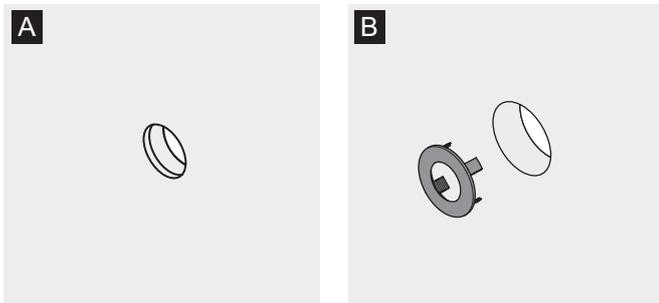


Fig. 9: Milled form without (a) and with cover clip (B)

Mounting for the non-electrified holder sets (Fig. 10/A) is identical to mounting for the electrified holder sets (Fig. 10/B).

1. Arrange for wooden panels with a milled form (see chapter 6.1) to be fabricated by a specialist works.

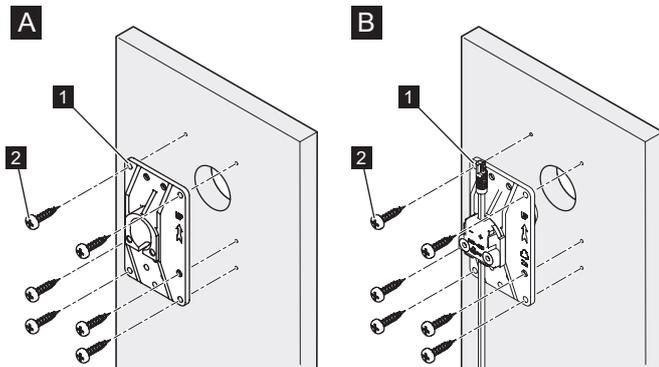


Fig. 10: Mounting on wooden panel

2. Apply holder set (Fig. 10/1).
3. Screw the wood screws (Fig. 10/2), through the holes provided in the holder set, into the panel and tighten to 3 Nm.
 - ➔ The holder set is fixed.

Attaching cover clip

If the version with cover clip has been selected, the cover clip must finally be attached after mounting the holder set.

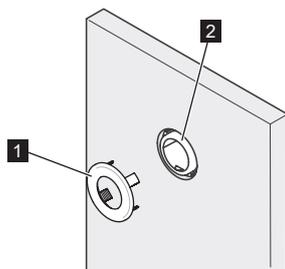


Fig. 11: Attaching cover clip

- Place the cover clip (Fig. 11/1) on the holder set (Fig. 11/2).

3.4.2 Holder sets to be retrospectively electrified

By using the electrical connection set 332-259.19, a non-electrified holder set (Fig. 12/A) can be retrospectively electrified (Fig. 12/B). The holder set does not need to be dismantled from the wooden panel for this procedure. Access to the back of the panel, however, must be ensured.

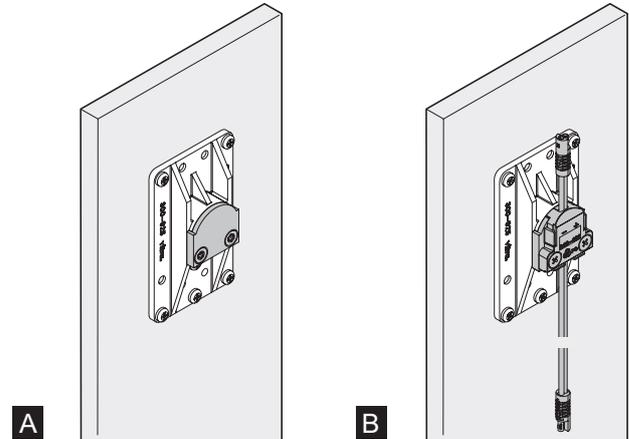


Fig. 12: Holder set, non-electrified (A) and electrified (B)

Removing cover panel

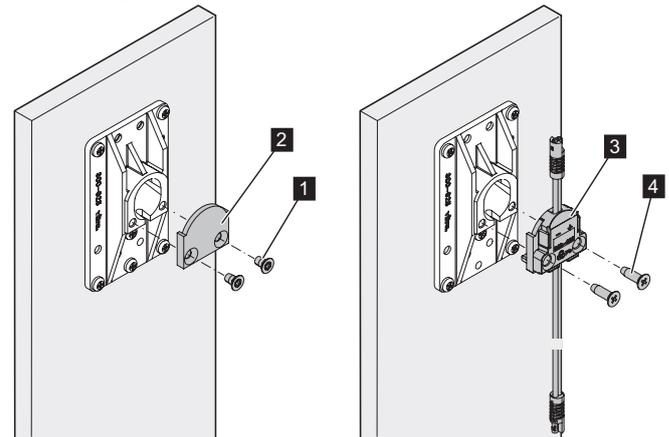


Fig. 13: Unscrewing cover panel


1. Loosen both screws (Fig. 13/1) with a Torx screwdriver. The screws and cover panel (Fig. 13/2) are no longer required and can be disposed of.
2. Fix the electrical connection set (Fig. 13/3) with the supplied countersunk screws (Fig. 13/4) to the holder set.
 - ➔ The holder set is electrified and can now be connected to the power supply.

3.5 Visplay plug system



NOTE

It is imperative to take account of power consumption of the electrical devices! The power consumption of all electrical devices should be below the nominal output rating of the converter. It is generally recommended to factor in a power reserve for additional electrical devices.

Operation with 90 W converter

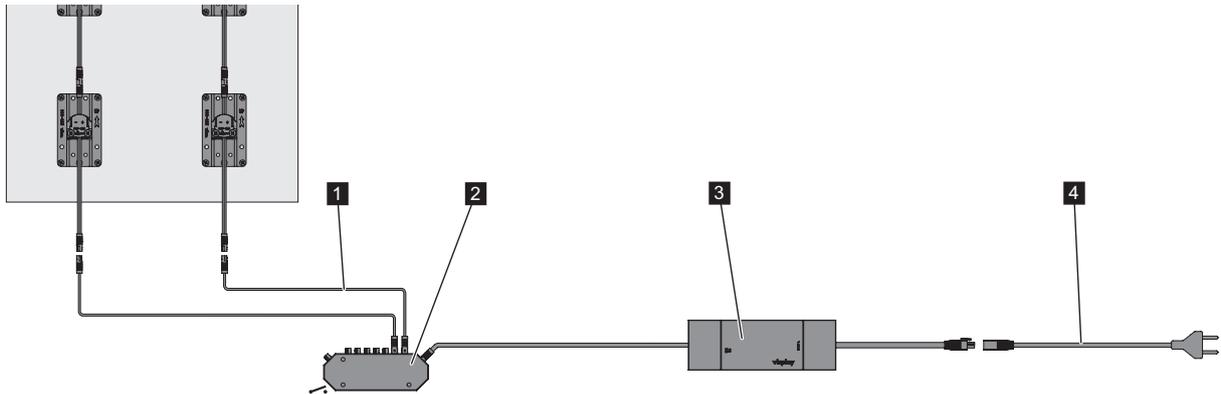

Powering with 2 x 90 W converters (max. 180 W)

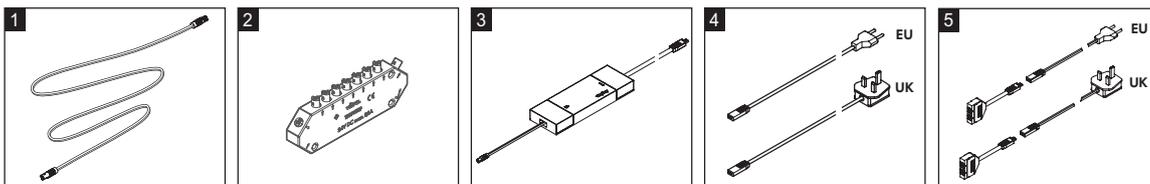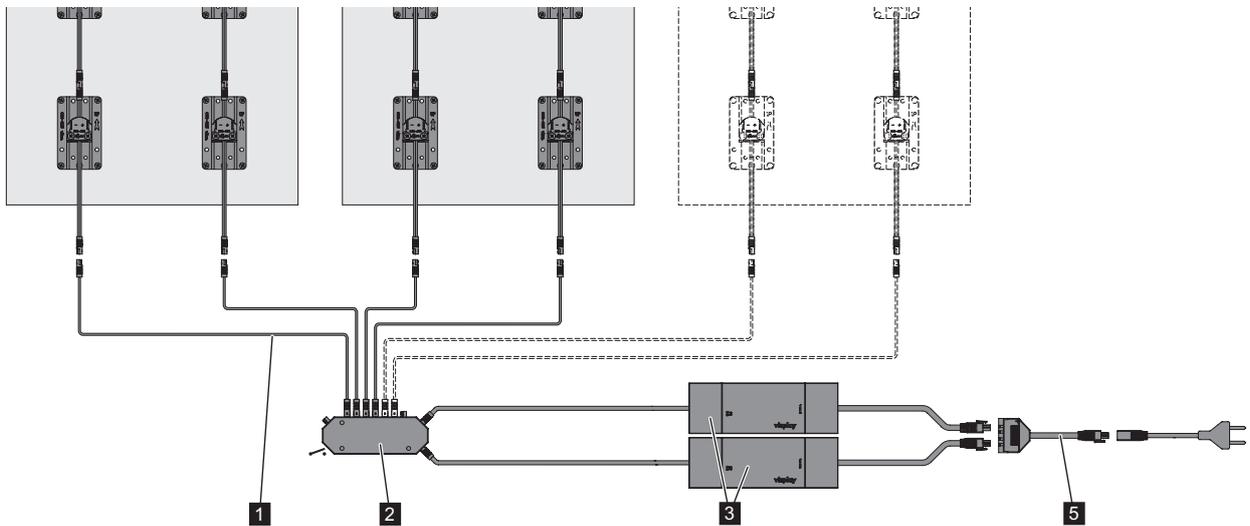

- 1 Extension cable 24 V DC
- 2 24 V DC distributor, 8-way
- 3 90 W LED converter
- 4 Supply lead 220–240 V AC
- 5 220–240 V AC distributor, 4-way

4 Operation

⚠ WARNING

Injury can be caused and the merchandise supports and/or system can be damaged if the maximum load of the merchandise supports is exceeded.

- > **Observe the maximum load values of the individual merchandise supports.**
- > **Do not exceed the maximum load of 40 kg per holder set.**

4.1 Attaching merchandise support

To insert the merchandise support, proceed as follows.

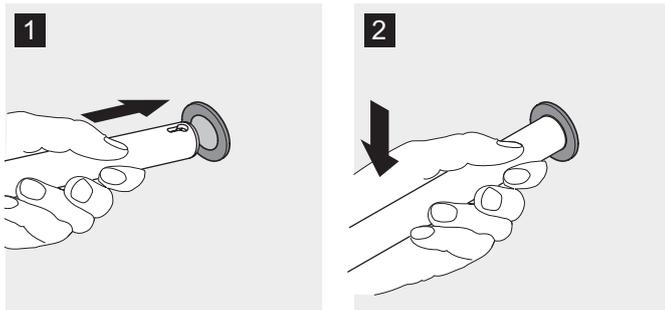


Fig. 14: Inserting merchandise support

1. Feed the merchandise support with a slight upward angle into the hole of the holder set up to the stop (Fig. 14/1), and then lower (Fig. 14/2).
2. Make sure that the merchandise support is correctly engaged in the holder set.
 - ☞ The merchandise support is securely fixed. It has a slight slope (approx. 1.5°).
3. Place goods evenly on the merchandise support and ensure that the maximum load is not exceeded. All load values are inclusive of the weight of the merchandise support.

4.2 Removing merchandise support

To remove the merchandise support, proceed as follows:

1. Remove goods from the merchandise support.
2. If a shelf is used, remove the shelf from the mounting bracket.

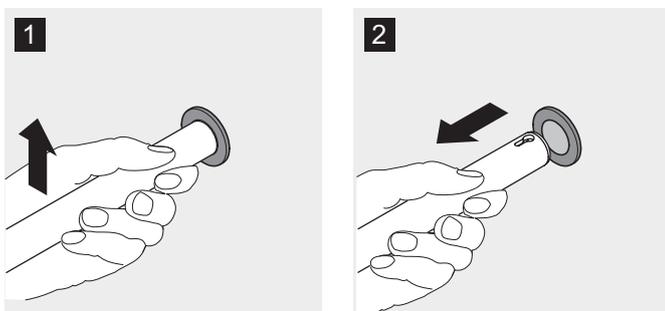


Fig. 15: Removing merchandise support

3. Slightly lift up the merchandise support/mounting bracket (Fig. 15/1) and pull away from the holder set (Fig. 15/2).
 - ☞ The merchandise support comes away from the holder set.

4.3 Cleaning

During the course of time, dust and deposits from clothes hangers can settle on the merchandise supports. In order that the goods on display do not become soiled, the merchandise supports must be regularly cleaned.

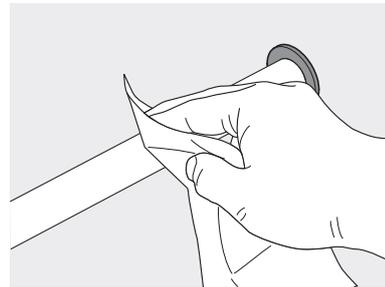


Fig. 16: Cleaning

1. Remove goods from the merchandise support.
2. Remove dirt on the merchandise support carefully with a soft, dry cloth (Fig. 16).
3. Remove stubborn dirt with a mild cleaning agent.

5 Dismantling and disposal

5.1 Dismantling

To dismantle the holder set, proceed as follows:

1. Remove goods from the merchandise supports.
2. Remove all merchandise supports (see section 4.2).

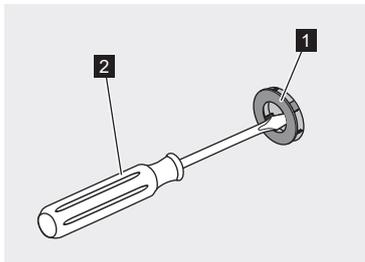


Fig. 17: Levering off cover clip

3. Lever off cover clip (Fig. 17/1) with a small slotted screwdriver (Fig. 17/2). The cover clip cannot be reused and must be replaced.
4. Unscrew screws.
5. Take off holder set.

5.2 Disposal

NOTE

If product components are improperly disposed of they can pose a danger to the environment.

- > Ensure product components are disposed of in a proper environmental manner or through waste management specialists.
- > Send components that can be recycled for recycling.

Disposal rules

Dispose of product components in line with the following principles:

- Send steel for recycling or scrapping.
- Send aluminium for recycling or scrapping.
- Send die cast zinc for recycling or scrapping.
- Send plastics for recycling.
- Dispose of remaining components sorted according to the type of material.

6 Technical data

6.1 Dimensions

6.1.1 Installed dimensions, holder set

Mono 20 P/L

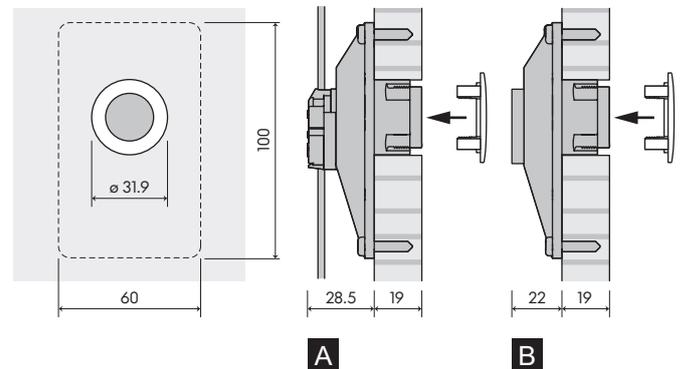


Fig. 18: Mono 20 P/L with power cable (A) / non-electrified (B)

Mono 20 P/L light

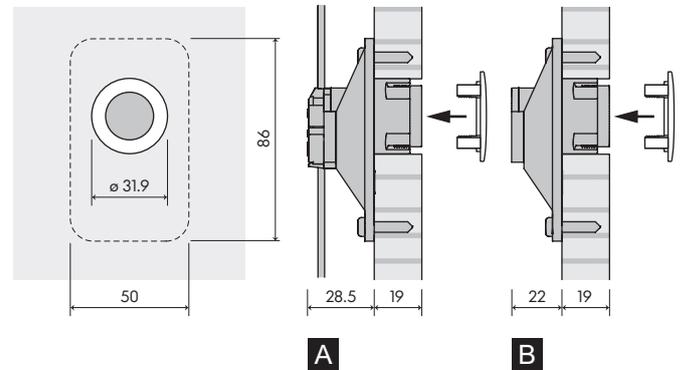


Fig. 19: Mono 20 P/L light with power cable (A) / non-electrified (B)

6.1.2 Milled form for holder set with cover clip

Mono 20 P/L

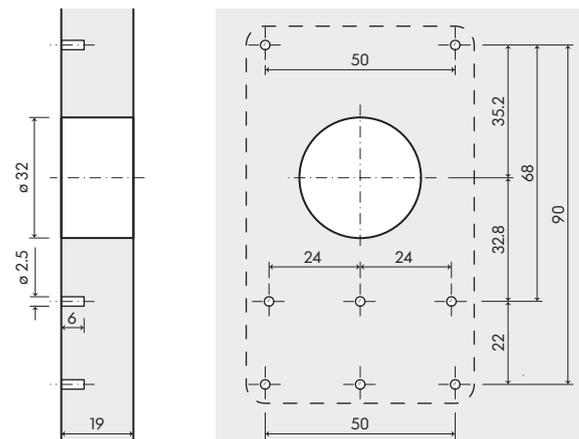


Fig. 20: Mono 20 P/L with cover clip

Mono 20 P/L light

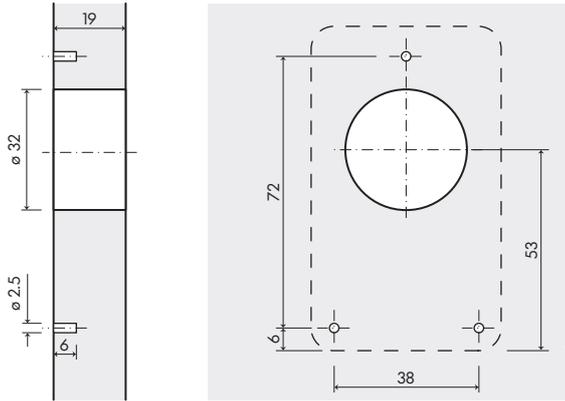


Fig. 21: Milled form for Mono 20 P/L light with cover clip

6.1.3 Milled form for holder set without cover clip

Mono 20 P/L

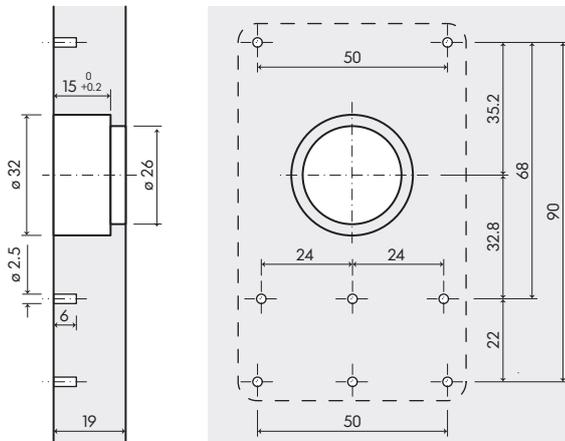


Fig. 22: Mono 20 P/L without cover clip

Mono 20 P/L light

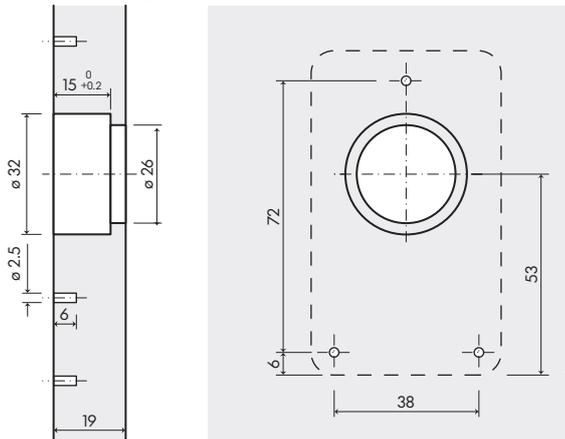


Fig. 23: Mono 20 P/L light without cover clip

6.1.4 Converter dimensions, dependent on power output

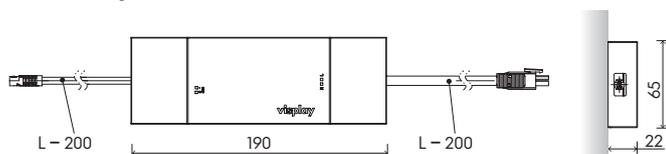


Fig. 24: Converter dimensions

6.2 Connection values

General

Specification	Value	Unit
Operating voltage	100 – 240	V AC
Frequency	50 – 60	Hz
Nominal voltage (SELV)	24	V DC
Nominal supply current, maximum	7	A
	168	W
Mains protection class; converter 10 – 150 W	III	
Maximum casing temperature (converter)	90	°

6.3 Load values

The maximum load applies including the dead weight and the weight of all components.

Holder set

Specification	Value	Unit
Mono 20 P/L holder set	40	kg/holder set
Mono 20 P/L light holder set	8	kg/holder set

Merchandise supports

Specification	Value	Unit
Shoe shelf for one shoe	20	kg
Shoe shelf for a pair of shoes	20	kg
Universal mounting bracket	20	kg
Hanger arm Ø 20 mm	20	kg
Single support bar Ø 20 mm	15	kg
Mounting bracket for support bar Ø 20 mm	15	kg
Mounting bracket for wooden or glass shelf	15	kg
Mounting bracket for support bar 30 x 15 mm	20	kg
Clamping mounting bracket for glass shelf	10	kg
Single mounting bracket Ø 20 mm	15	kg
Hanger set for wooden panel	20	kg
Mounting bracket for wooden shelf	15	kg
Hanger hook Ø 6 mm	2	kg
Hanger hook Ø 7.5 mm	2	kg

Panel thickness

Specification	Value	Unit
Wooden panel thickness	19	mm