

# commercial solutions

# 2026

Architectural and integrated lighting solutions,  
modular structures, for commercial projects and spaces



commercial  
solutions

2026

Three specialists.  
One shared vision.  
One Group.

L&S, Visplay and Flux join forces to create an innovative proposal for retail and commercial interiors: electrified modular systems and structures, architectural and showcase lighting for a spatial atmosphere – all from a single source, modular, coordinated, and impactful.

We enable spaces that bring brands to life, showcase products, and adapt effortlessly to change by providing the key elements for visionary interior design.

By combining expertise and streamlining processes, we deliver integrated spatial solutions that work – today and tomorrow.

Light&Space

**L&S** Lighting  
Intelligence

**visplay**

 **FLUX**

# We make your projects shine

## One international Group, for serving the global market

**L&S Italia S.p.A.**, founded in 1977 in Maron di Brugnera (PN), in the heart of Italy's largest furniture district, is today the Headquarters of the L&S Group. We are a leader in the design and production of integrated, high-efficiency, and custom-made lighting systems and solutions, ideal for residential, industrial, and commercial applications (e.g. retail, hospitality).

Our clients include the most prestigious furniture manufacturers (e.g. kitchens, wardrobes, bathrooms, living room furniture), distributors, retailers, and shopfitters, as well as manufacturers of home appliances (kitchen hoods), elevators, and escalators. To all of them, we offer unique and innovative solutions to enhance their collections.

Thanks to the high quality of our production activities, our ability to offer a tailored service, and continuous investments

in technological research, we have progressively expanded our presence in foreign markets, consolidating our role as a strategic point of reference in Europe for furniture lighting.

Furthermore, with the addition of new companies to the Group starting in 2025—Visplay and Flux—we have significantly expanded our portfolio of lighting technology and modular solutions for commercial projects. This allows us to offer a unique international service with customized design solutions for every client. The L&S Group today employs a staff of over 550 people and has an international footprint with 7 production plants across Italy, Germany, China, and the United States, 10 sales offices for a global logistics and certification platform, serving customers in over 50 countries.

**Visplay**, with over 85 years of design experience and headquartered on the Vitra Campus in Germany, is a benchmark in the development and production of quality electrified modular structures.

**Flux**, headquartered in Recanati, Italy, specializes in high-end, bespoke lighting technology solutions.



Design & engineering excellence

Tailor-made service

One-stop solution provider

Lighting expertise

International service capabilities

Continuous technological research

Sustainability approach



### Visibly Invisible

Our systems and solutions have an understated quality that blends into the architecture and interior design of any space. This keeps the focus where it belongs: on the merchandise.

# Light&Space

We create lighting solutions and modular furnishing systems that enhance design and individual experience



### We design long-lasting solutions

We develop modular furnishing systems and high-quality, tailored lighting solutions for stores, commercial spaces, and office environments. Our systems are conceived as architectural tools — elements that define and shape space while maintaining visual coherence and technical precision. By integrating furniture and lighting from the outset, we create environments that balance function, atmosphere, and identity. The interplay of structure,

materiality, and light enables architects and designers to articulate spatial narratives with freedom and consistency. Each system is designed for longevity and adaptability. Thanks to their modular construction and high manufacturing quality, our solutions can be reconfigured and extended over time — supporting evolving spatial concepts and sustainable design practice.

Thanks to our in-house expertise, we are able to meet the needs of diverse users and markets, always ensuring the highest quality.

### Global platform for production and logistics

Our international presence, with locations in Europe, China, and the United States, allows us to be integrated into the main furniture manufacturing districts in their respective countries. We offer a global logistics, production, and service platform, ensuring the sharing of know-how.

### International certifications


Our products are designed to be easily certifiable according to all major market standards, thus reducing time-to-market. New products are engineered from the outset to effortlessly meet the requirements set by current regulations, anticipating future needs and ensuring quick compliance with regulatory standards.

### In-house testing laboratories

We constantly invest in diagnostic and analytical tools for our in-house laboratories to ensure the safety and reliability of our products through continuous testing. We also provide all necessary documentation to obtain any type of certification, offering real-time support for regulatory updates as well.

### Lighting calculation

We offer detailed light analysis to ensure optimal light distribution in every space: in-depth study and 3D simulation to visualize and optimize the lighting effect before installation. We meticulously position lights according to lighting parameters (luminous flux, beam, CCT); CAD positioning after lighting calculation and creating 3D views to show luminance contrasts. Certified tests and inspections to ensure lighting solutions comply with safety and quality standards. We ensure optimal light distribution in every environment and that every corner and product is highlighted in the most appropriate way.

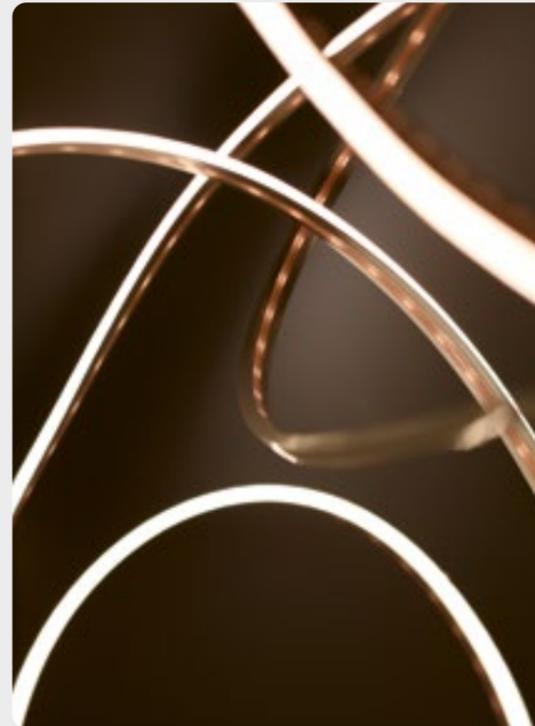



### 360° services and co-design solutions

We will provide you with a professional expert team who will give you personalised advice and support you with the specification, including on site. All customers can contact our Service Centre by phone or email if they have any questions. Our systems can be customised to your requirements: special dimensions, special colours and surfaces or customised product carriers can be implemented.

### Design & engineering excellence

As design engineers, we are passionate about developing system solutions for commercial interiors with a key focus on intelligent connections, high weight load capacity with minimal dimensions, flexibility of use, and structures that are easy to assemble, reconfigure and clean. We work hand in hand with brands and architects to assist them in accomplishing their vision.

### Patented and innovative products

Thanks to our expertise in Research and Development and the experience gained in integrating lighting into interior furnishings, we are able to transform your ideas into projects, prototypes, and finished products, working in constant collaboration with the technical departments of our clients. We are the ideal partner for the co-development of lighting solutions and modular structures, providing added value to your products. The patents obtained for new developments testify to our commitment to innovation.

### Sustainable design

We have embarked on a strategic journey to implement product development processes and activities inspired by the principles of the circular economy, collaborating with universities, designers, and research centers. At product level, we have focused on the development and improvement of the group's core products:

- development of a new generation of high-efficiency LED strips that enable energy savings of up to 50% compared to the previous version;
- drivers which reduces the use of components and minimizes overall dimensions, thanks to the distributor being integrated into the power driver;
- long-lasting products thanks to the versatility of our modular systems;
- refurbishment service that extends the lifecycle of existing luminaires through a complete requalification—enabling their redeployment in new stores at significantly lower investment. This circular approach reduces waste and environmental impact while ensuring the same performance, reliability, and visual comfort as new fixtures.

# Welcome to Flow. The new path of light and space

Flow is the new showroom for Commercial solutions within the L&S Group, located on the iconic Vitra Campus in Weil am Rhein, Germany.

Visible invisible.  
Horizontal support systems that efficiently utilize wall space while remaining unobtrusively in the background. With inspiring possibilities thanks to lighting and digital devices, products can be perfectly showcased.  
FLOW

Designed as a dynamic environment for discovery and exchange, Flow showcases the latest innovations in modular systems and structures, light boxes, light panels, showcases, and ceiling lighting.

The exhibition brings together the creative strength and expertise of the L&S Group highlighting their shared vision of functional, flexible, and aesthetic commercial spaces.

More than just a showroom, Flow is a place of inspiration — where design meets technology and light shapes space.

Visitors are invited to explore how integrated lighting and architectural solutions can transform environments, redefine retail experiences, and set new standards for modern spatial design.

# Adaptive lighting experience

Create unique lighting and natural scenes to set your perfect retail spaces

Light is an invisible thread that connects and enhances every space. The harmonious combination of natural and artificial light is a fundamental supporting element for different environments to create an ecosystem of attention and wellbeing.

Our Adaptive Lighting Technology is an intelligent system that respond to context, content, and creative vision. Our light source devices and Ultra-wide CCT spectrum control are designed for dynamic integration and flexibility.

This versatile approach enables spaces to evolve. It's lighting designed not for a single moment, but for infinite possibilities.

- Tailor made customer experience
- Optimal product visibility with true colors and sharp details
- Dynamic scenarios for any retail experience

## ADAPTIVE EXPERIENCE. Light is emotion


Custom scenes can be set to match the mood you want to create.

This holistic approach transforms every retail environment into dynamic stages where lighting guides customers through zones and highlights purchasing key moments.

Each space breathes as one intelligent system, creating natural transitions.

Discover our complete range of track and ceiling luminaires, wall-washers, RGB, and tunable white solutions.

## DYNAMIC LIGHTBOX. Light is rhythm

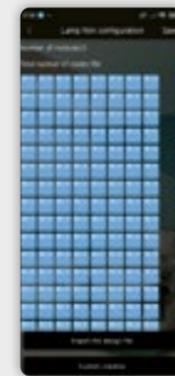

Brands and interior designers can adapt their character to match messaging through tailored lighting settings.


Dynamic lightbox creates rhythm and variety throughout space while maintaining overall coherence—each area tells its story through precisely controlled light.

Product showcases can shift from warm, intimate presentations (1600K) to bright, energetic reveals (12000K).

Presentation areas transition from ambient backgrounds to focused illumination.

GATEWAY + LED LIGHT SOURCE + BLUETOOTH CONTROLLER + MEC LITE DRIVERS + APP

## ADAPTIVE LIGHT SPOT. Light is detail

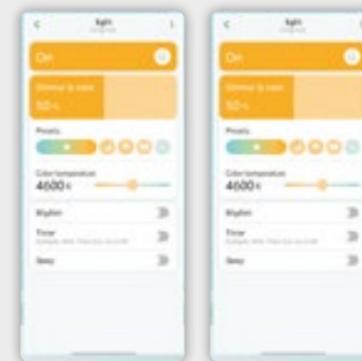

Directional spotlights and adjustable dimming ensure pieces are showcased to perfection, without glare or distortion. Light spots deliver precision control for highlighting key areas. Each fixture becomes a focused tool for creating accents, or drawing attention to specific details. Control your space's colour temperature to create rich, earthy tones with warm glow or reveal the finest details with bright daylight.

- Modular configurations and variable optics — from narrow-beam spot versions to wider distributions, the LED sources integrate interchangeable optics and multiple beam-angle options, enabling precise control of light distribution.
- Adjustable color temperature (CCT 1800 K–12000 K) — all LED sources offer a wide spectrum from warm to cool light.
- High color rendering (CRI>92) — the LED sources are designed to enhance product appearance and improve the perceived experience.
- Integrated smart control — with Bluetooth modules and app compatibility, the LED sources support dynamic scenes and real-time adjustments.

GATEWAY + SPOTLIGHT + APP

# Innovative retail solutions




## Modular thinking. How pop-up spaces are setting new standards.



Pop-up concepts are widely seen as a flexible response to a rapidly changing market. At the same time, expectations of temporary spaces are increasing. Physical environments remain relevant when they take on new roles. A PwC study on Store 4.0 describes this shift from pure points of sale to spaces for interaction, brand presence and experience. For pop-ups, this means creating orientation and communicating content within a very short time.


Large pop-up spaces require a defining framework that creates structure where none previously existed. The Spatio structural system can be used as a freestanding construction to establish a clearly defined zone for product presentation. At the same time, the space remains open to changing content and scenography.

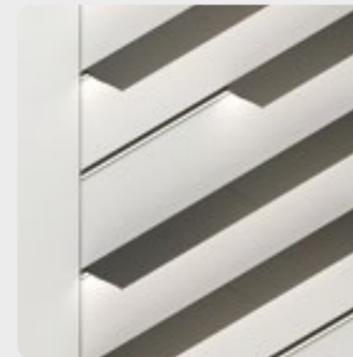

## Systems for enhancing perception of products. Electrified solutions.

An innovative range that enable an intelligent use of power lighting and lighting. Our systems are ingeniously designed to ensure that electricity is available wherever needed, with integrated power cables and technical components that are cleverly concealed.

We are able to provide an electrification system that tightly integrates the track and shelf, becoming a part of it, by develop and manufactures invisible track and shelf connectors. Light becomes a crucial element that helps to emphasise the product's characteristics by enriching its details and highlighting its shape.

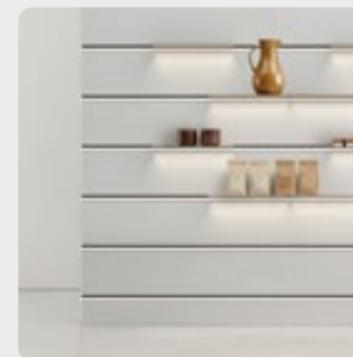

## Versatile and flexible solutions

The design of our modular structures is freely configurable for maximum customization of your furniture projects.

- Flexibility: brackets for any shelf application: straight, inclined, glass, wood
- Light shelves can be moved as desired
- Easy to install and maintenance
- Practical: No wiring or drilling needed

# Solutions for commercial interiors

A strong focus on high-quality tailored solutions that meet the evolving needs of commercial and retail environments



Our modular systems, integrated lighting and architectural lighting solutions are suited to a wide range of goods, from clothing and beauty products to food and digital equipment.

We offer a comprehensive portfolio of smart lighting, modular furnishing and space defining systems that are used in stores and all type of commercial spaces or offices. In addition to our standard systems, we offer our customers the development of individual solutions.



# Index


## Architectural lighting



TRACK MOUNTED	RECESSED MOUNTED	SURFACE MOUNTED	SPOTLIGHTS AND BRIDGES
Track Systems p. 22	Zenius Snooter p. 48	Perla BUILT IN p. 82	Spotlights p. 96
Linear TRACK MICRO p. 24	Zenius Washer p. 52	Glowqube SURFACE p. 84	VC 70 p. 100
Perla TRACK MICRO p. 26	Perla RECESSED p. 56	Numio p. 86	Avior System p. 102
Easy Neo TRACK p. 28	Glow p. 58	Perla p. 88	Deva p. 110
Linear TRACK p. 32	Jero p. 62	Easy Neo p. 90	Bridge SCREEN p. 112
Perla TRACK p. 34	Lys p. 64		Bridge II p. 114
Easy Neo TRACK p. 38	Zint p. 66		
Lite TRACK p. 42	Eye Cube p. 68		
Perla TRACK p. 44	Dahlia p. 70		
Savannah TRACK p. 46	Nimbis p. 72		
	Easy Neo PULL IN/OUT p. 74		
	Perla PULL IN/OUT p. 78		
	Perla DIRECTABLE p. 80		


## Showcase lighting

## Linear lights and LED strips




LINEAR
LED Strips p. 118
Flexneon p. 122
Linear Light p. 124
MB60 II p. 132
Nano tubular II p. 134
Norma p. 136
Norma PRO p. 138
Norma PRO 45 p. 140
Nano NORMA 45 p. 142
Mini p. 144
Mininoor p. 146
Cali p. 148
Malindi2 p. 150
<b>LED REELS</b>
LED REEL p. 152
<b>ACCESSORIES</b>
Cables and connectors p. 154

## Lighting panels



SOLARIS
Solaris p. 158
<b>LIGHTBOX</b>
Lightbox p. 166

## Modular systems



ELECTRIFIED STRUCTURES
Invisible 6 p. 172
Hi Line p. 174
Xero 4 EVO p. 176
Thin line p. 180
Beam EVO p. 182
Spatio p. 184
Multi-Lane p. 186
Mono 20 p. 188
Qubo Ceiling p. 190
Qubo M p. 192
Qubo 25 p. 194
Omnio p. 196
<b>POWER SUPPLY PLATFORM</b>
Mec Lite p. 200
<b>CONTROL MODULES</b>
Lite MT MATTER p. 210
Lite BT BLUETOOTH p. 211
Lite sensor p. 212
Lite remote p. 214
Zigbee Module p. 215
4 channel remote p. 217
Sensor Module p. 218
Lite CS CASAMBI p. 222
Lite DL DALI p. 223
Wired C p. 224

## Drivers and controls



# Architectural lighting

## TRACK MOUNTED

### Track Systems

Linear TRACK MICRO

Perla TRACK MICRO

Easy Neo TRACK

Linear TRACK

Perla TRACK

Easy Neo TRACK

Lite TRACK

Perla TRACK

Savannah TRACK

p. 22

p. 24

p. 26

p. 28

p. 32

p. 34

p. 38

p. 42

p. 44

p. 46

## RECESSED MOUNTED

### Zenius Snooter

Zenius Washer

Perla Recessed

Glow

Jero

Lys

Zint

Eye Cube

Dahlia

Nimbis

Easy Neo PULL IN/OUT

Perla PULL IN/OUT

Perla DIRECTABLE

p. 48

p. 52

p. 56

p. 58

p. 62

p. 64

p. 66

p. 68

p. 70

p. 72

p. 74

p. 78

p. 80

## SURFACE MOUNTED

Perla BUILT IN

Glowqube SURFACE

Numio

Perla

Easy Neo

p. 82

p. 84

p. 86

p. 88

p. 90

# Track Systems


The modular core framework for lighting



A complete ecosystem of tracks, connectors, adapters, accessories and driver boxes supports everything from straightforward layouts to advanced configurations, including integrated control options where required.

A clean, continuous infrastructure that evolves into complete lighting schemes where spotlights, linear modules, and pendants can be installed as surface mounted, recessed, or suspended, adapting to ceiling conditions, architectural constraints, and the desired lighting effect. This combination of power distribution and mounting support allows full flexibility in spotlight layout and management, with luminaires that can be positioned, moved, or added at any time.

While track is inherently linear, selected solutions can also be curved to create more bespoke layouts, enabling personalized geometries and distinctive spatial signatures.

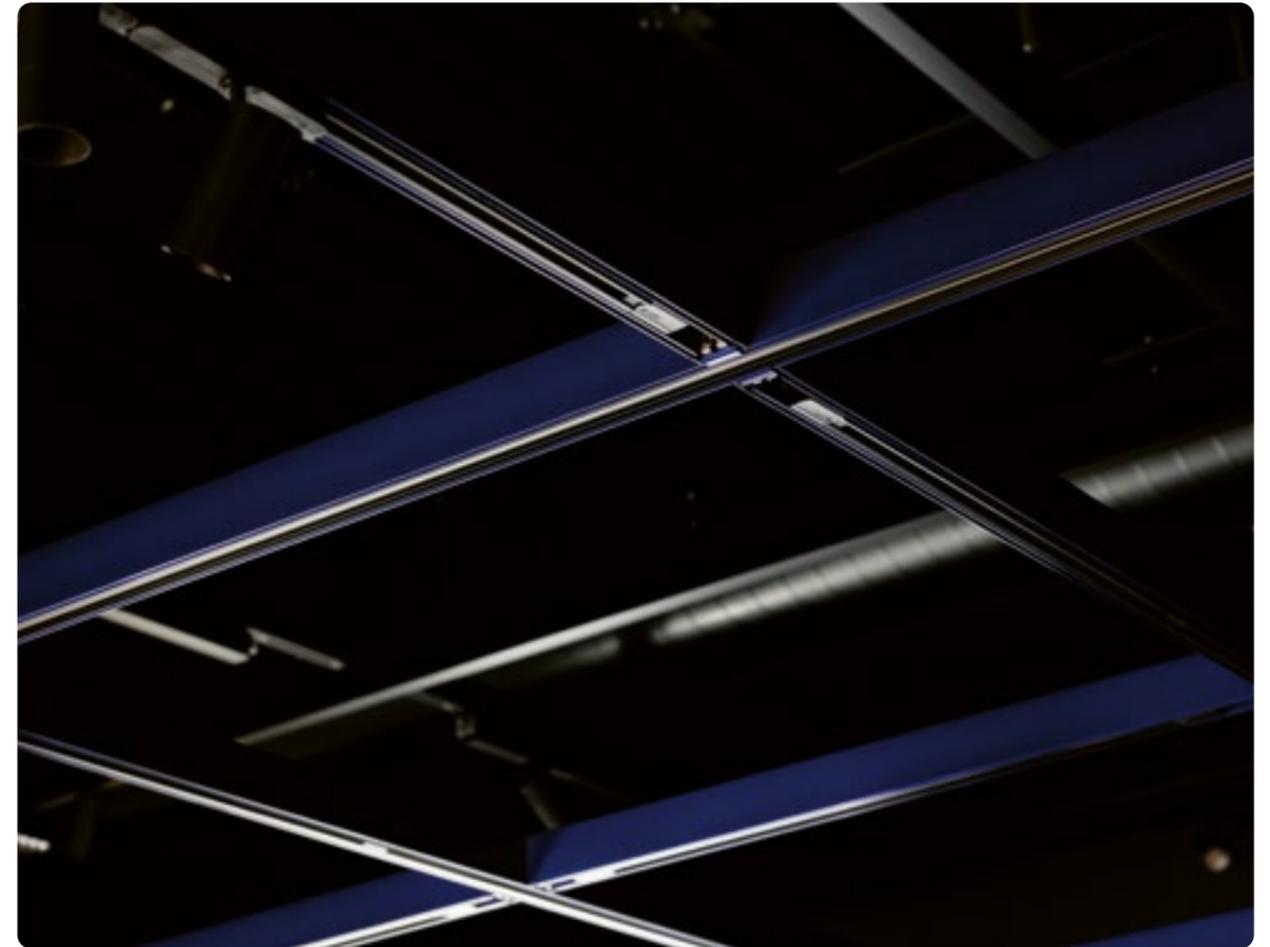

## Low Voltage Tracks

Low-voltage systems focus on minimal visual impact, refined integration, and enhanced safety. Ideal when the project calls for slim profiles, including micro track options, and maximum compositional freedom. Dedicated drivers support contemporary

“plug-in” modules and flexible lighting setups, often making it easier to incorporate dimming and advanced control. The system remains truly modular: reposition of a light point, change optics, or add a linear element while keeping the same infrastructure in place.

## High Voltage Tracks


High-voltage track remains the most widely adopted standard for professional installations where robustness, higher power capacity, and broad compatibility are key. In multi-circuit versions, different groups of luminaires can be managed on the same track, enabling separate switching or

scene setups by area or function—especially valuable in retail, museums, hospitality, and exhibition spaces. This approach delivers a reliable, scalable platform for adaptable lighting layouts that can be updated over time without structural changes.

# Linear TRACK MICRO



Linear lighting for low-voltage track systems.

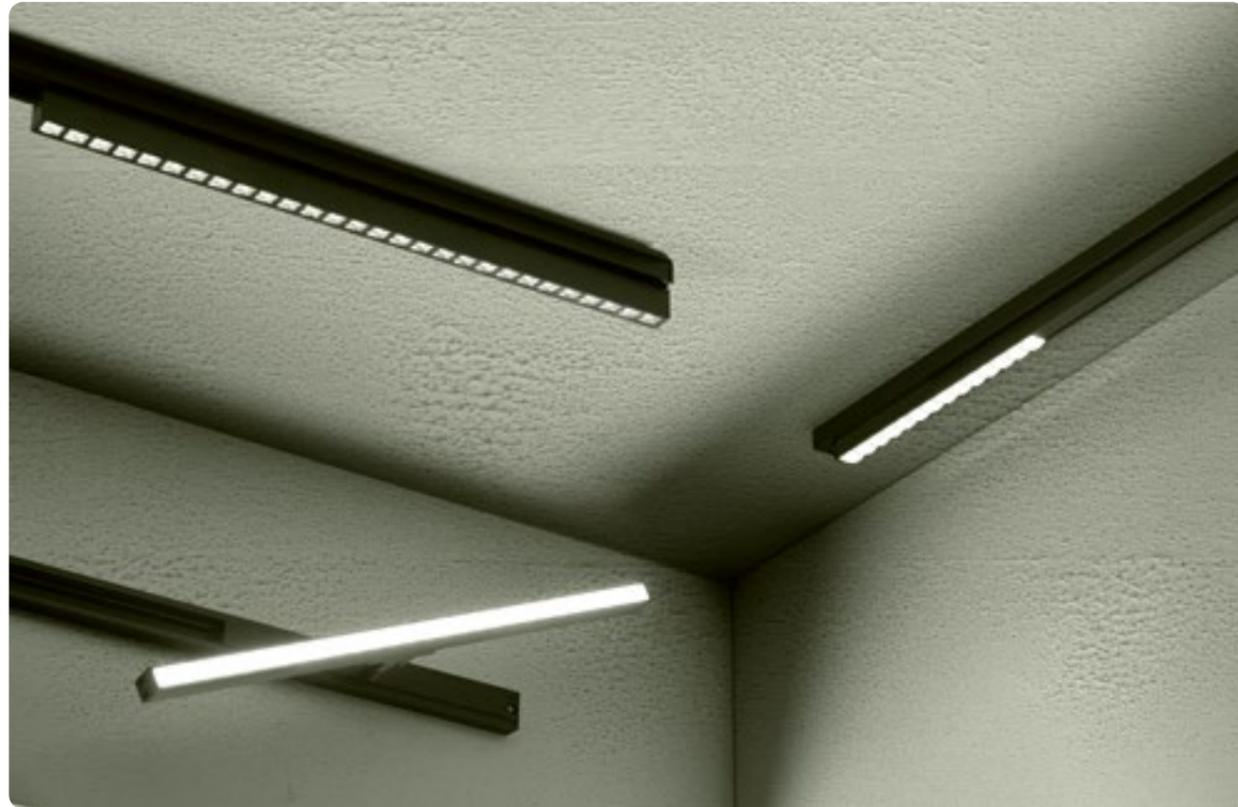

**DESCRIPTION**

Compact linear collection of 48V micro tracks available in Dot and Diffuser variants.  
Two color temperatures, fixed output.  
Clean light runs and precise accents shape retail displays.

**INTENDED USE**

Niches, shelves, counters and perimeters. Used alone or together, Dot and Line balance intensity and uniformity.

**FINISHES**




Available in black finish.  
Available in white finish.  
Available in grey finish.  
Available on request finish.



# Linear TRACK MICRO

48 V

(mm)

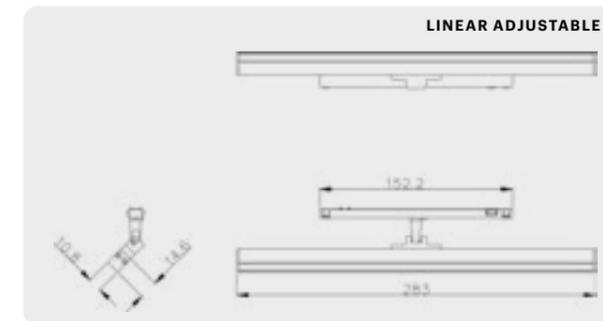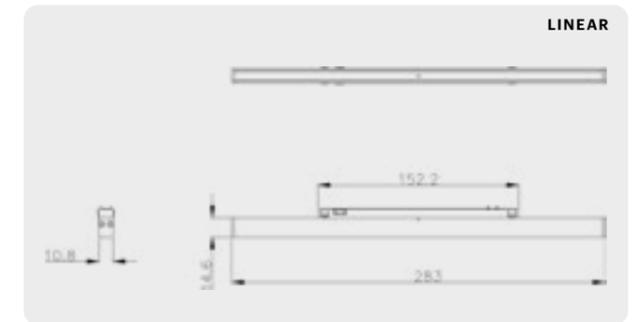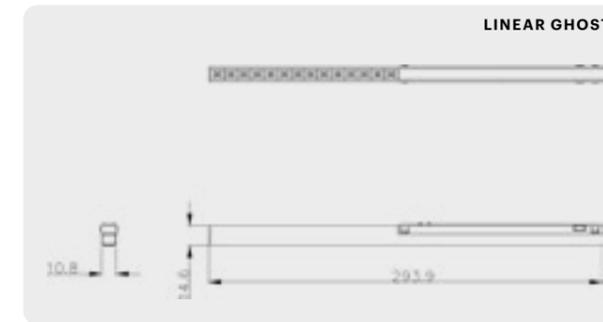

LINEAR DOT	CCT	IP	CODE
.....	2700K	20	T035
LED 8W	3000K		
CRI>90	3500K		
.....	4000K		
ghost	2700K	20	T037
LED 4W	3000K		
CRI>90	3500K		
.....	4000K		
adjustable	2700K	20	T036
LED 8W	3000K		
CRI>90	3500K		
.....	4000K		

LINEAR DIFFUSER	CCT	IP	CODE
.....	2700K	20	T030
LED 8W	3000K		
CRI>90	3500K		
.....	4000K		
ghost	2700K	20	T021
LED 4W	3000K		
CRI>90	3500K		
.....	4000K		
adjustable	2700K	20	T032
LED 8W	3000K		
CRI>90	3500K		
.....	4000K		

# Perla TRACK MICRO



Compact spotlight with directable light for low-voltage track systems.



### DESCRIPTION

Ultra-compact track-mounted spotlight expressing the most essential interpretation of the Perla family.

Designed for minimal tracks and close viewing distances, it delivers delicate, controlled highlights with maximum visual restraint.

### INTENDED USE

Display cases and intimate retail settings, where light must enhance products while the fixture remains visually imperceptible.

### STRAIGHT ARM



### FINISHES




- Available in black finish.
- Available in white finish.
- Available in grey finish.
- Available on request finish.

# Perla TRACK MICRO

48 V

(mm)

ILLUMINANCE

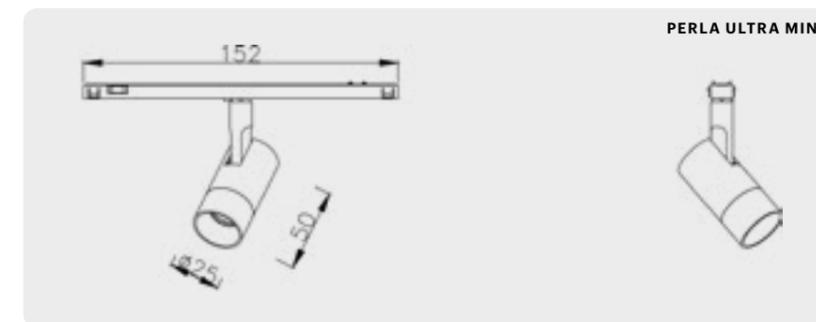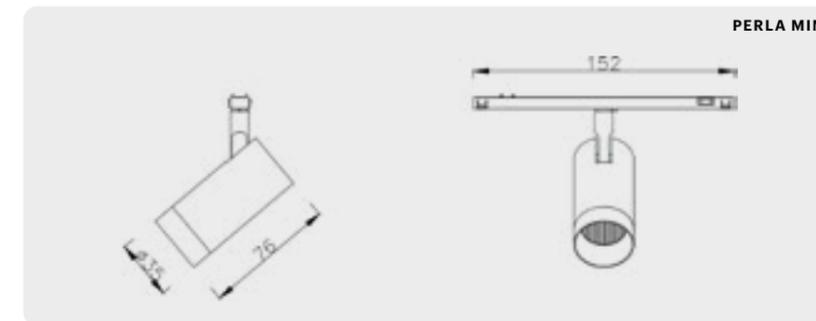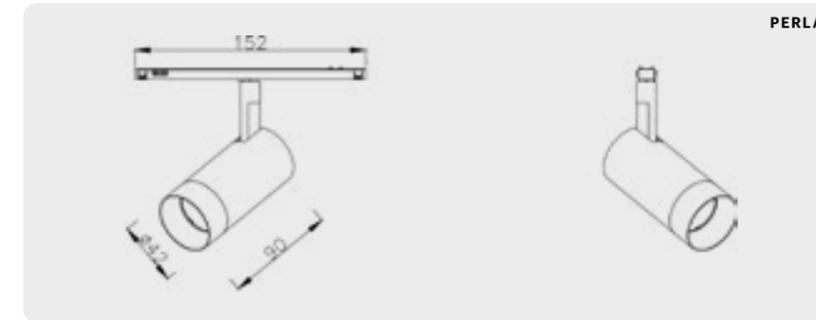

9W 3500k 20°:  
552lm 79lm/W

4W 3500k 20°:  
311lm 78lm/W

PERLA	straight arm	CCT	IP	CODE
.....		2700K	20	.....
.....		3000K		
.....		3500K		
.....		4000K		

PERLA MINI	straight arm	CCT	IP	CODE
.....		2700K	20	T006
.....		3000K		
.....		3500K		
.....		4000K		

PERLA ULTRA MINI	straight arm	CCT	IP	CODE
.....		2700K	20	T043
.....		3000K		
.....		3500K		
.....		4000K		

# Easy Neo TRACK



Spotlight on low voltage track with adjustable light.



### DESCRIPTION

Track-mounted spotlight Easy Neo for refined applications on 48V tracks.

Controlled output and discreet integration.


Snap-in mounting and interchangeable optics support precise layouts and expressive light layering.

### INTENDED USE

Designed for retail ceilings with suspended or surface-mounted tracks, offering flexible, controlled lighting.

### FINISHES


- Available in black finish.
- Available in white finish.
- Available in grey finish.
- Available on request finish.



# Easy Neo TRACK LENS


48 V

(mm)

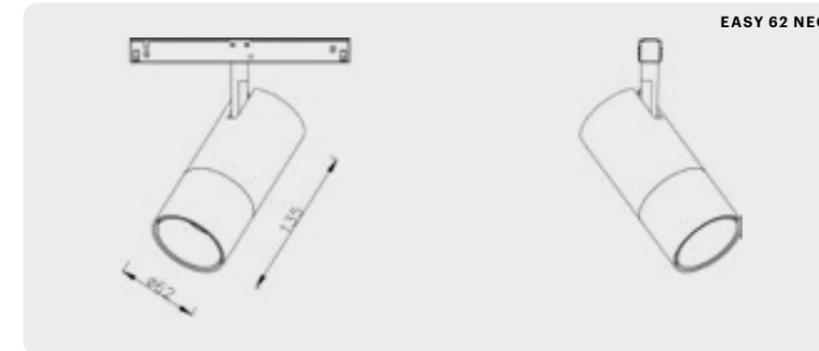

### ILLUMINANCE

25W 4000k 18°:  
2136lm | 85lm/W

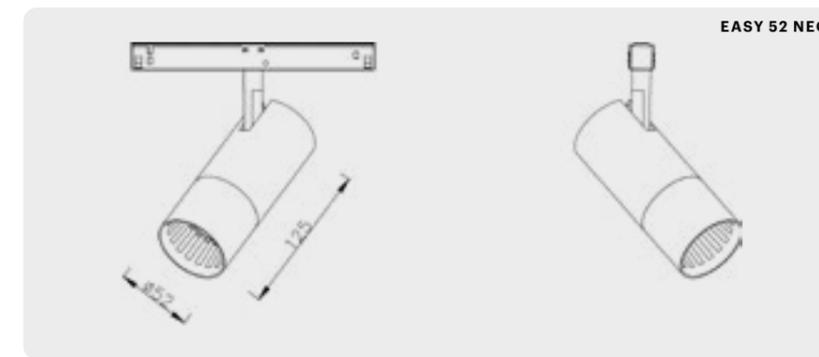

18W 4000k 18°:  
1585lm 88lm/W

EASY 62 NEO		CCT	IP	CODE
	straight arm	2700K	20	T019
.....		3000K		
LED 25W		3500K		
.....		4000K		
CRI>90				
	double arm	2700K	20	T028
.....		3000K		
LED 25W		3500K		
.....		4000K		
CRI>90				
	long arm	2700K	20	T025
.....		3000K		
LED 25W		3500K		
.....		4000K		
CRI>90				


EASY 52 NEO		CCT	IP	CODE
	straight arm	2700K	20	T087
.....		3000K		
LED 18W		3500K		
.....		4000K		
CRI>90				
	double arm	2700K	20	T039
.....		3000K		
LED 18W		3500K		
.....		4000K		
CRI>90				
	long arm	2700K	20	T033
.....		3000K		
LED 18W		3500K		
.....		4000K		
CRI>90				

# Easy Neo TRACK REFLECTOR


48 V

(mm)

ILLUMINANCE

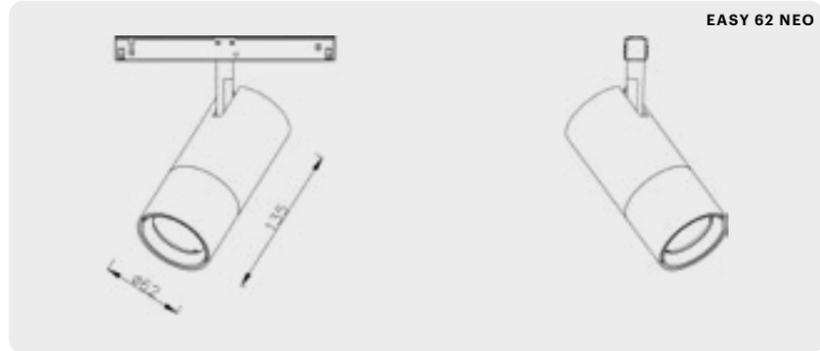

EASY 62 NEO

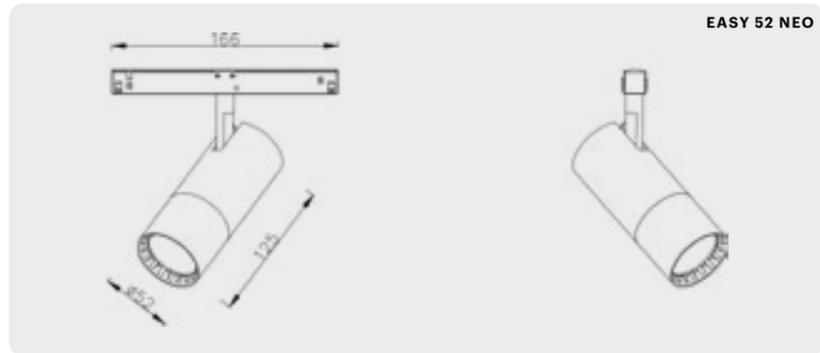

EASY 52 NEO

18W 4000K 18°:  
1724lm | 96lm/W

EASY 62 NEO		CCT	IP	CODE
.....	straight arm	2700K	20	T020
LED 25W	.....	3000K		
.....	.....	3500K		
CRI>90	.....	4000K		
.....	double arm	2700K	20	T031
LED 25W	.....	3000K		
.....	.....	3500K		
CRI>90	.....	4000K		
.....	long arm	2700K	20	T026
LED 25W	.....	3000K		
.....	.....	3500K		
CRI>90	.....	4000K		

EASY 52 NEO		CCT	IP	CODE
.....	straight arm	2700K	20	T086
LED 18W	.....	3000K		
.....	.....	3500K		
CRI>90	.....	4000K		
.....	double arm	2700K	20	T041
LED 18W	.....	3000K		
.....	.....	3500K		
CRI>90	.....	4000K		
.....	long arm	2700K	20	T048
LED 18W	.....	3000K		
.....	.....	3500K		
CRI>90	.....	4000K		



# Linear TRACK



Linear illumination for flexible track-based layouts.



**DESCRIPTION**

Linear 48V track range mounts directly to the track for fast placement and easy repositioning. Dot and Diffuser variants allow precise, adaptable lines of light as layouts evolve.

**INTENDED USE**

Diffuser provides a continuous, comfortable wash for suspended or surface-mounted tracks in offices, coworking spaces and retail.




**FINISHES**

- Available in black finish.
- Available in white finish.
- Available in grey finish.
- Available on request finish.

# Linear TRACK

48 V

(mm)

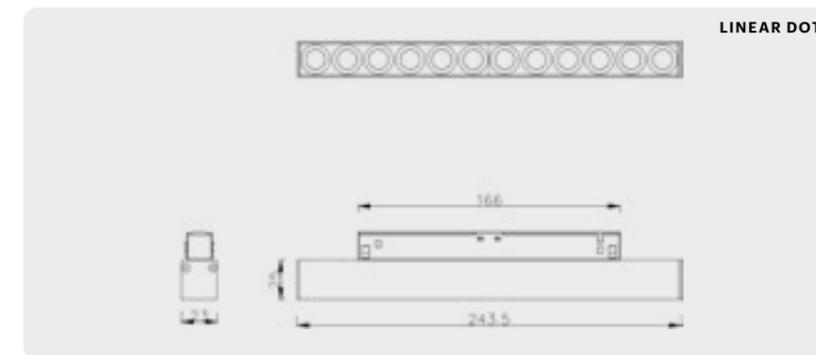

LINEAR DIFFUSER	CCT	IP	CODE
	2700K	20	T059
	3000K		
LED 15W	3500K		
CRI>90	4000K		

LINEAR DOT	CCT	IP	CODE
	2700K	20	T060
	3000K		
LED 15W	3500K		
CRI>90	4000K		

# Perla TRACK



Compact spotlight on low voltage track with adjustable light.



**DESCRIPTION**


Low-voltage track-mounted spotlight expressing the most discreet side of the Perla family. Compact footprint and plastic lenses deliver precise, comfortable light for refined accents and carefully composed lighting scenes. Straight, double swivel and long arm options.

**INTENDED USE**

Display cases and suspended track systems, where precision and visual discretion are essential.

**FINISHES**

Available in black finish.  
Available in white finish.  
Available in grey finish.  
Available on request finish.


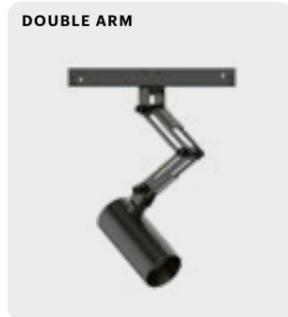


# Perla TRACK


48 V

(mm)

ILLUMINANCE

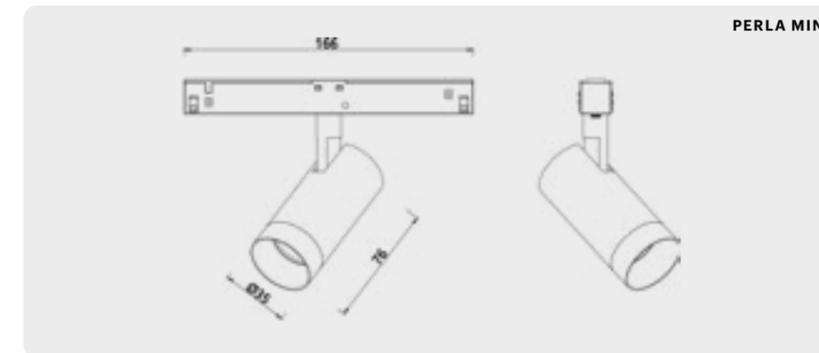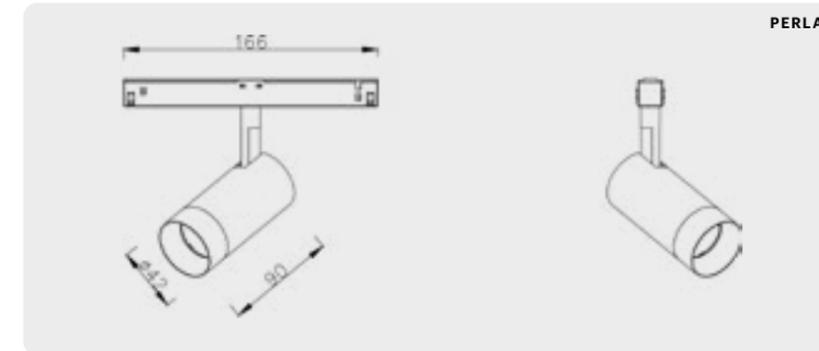

9W 3500k 20°:  
552lm 79lm/W

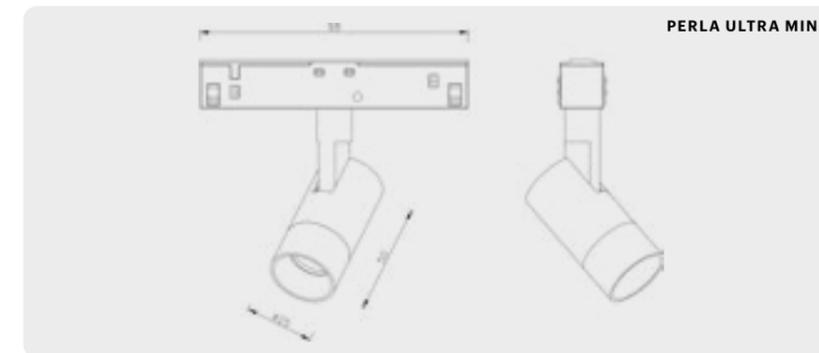


4W 3500k 20°:  
311lm 78lm/W

PERLA		CCT	IP	CODE
	straight arm	2700K	20	T044
.....		3000K		
.....		3500K		
.....		4000K		
	double arm	2700K	20	T045
.....		3000K		
.....		3500K		
.....		4000K		
	long arm	2700K	20	T046
.....		3000K		
.....		3500K		
.....		4000K		
	swivel arm	2700K	20	T047
.....		3000K		
.....		3500K		
.....		4000K		

## Perla TRACK

48 V

PERLA MINI		CCT	IP	CODE
.....	straight arm	2700K	20	<b>T001</b>
LED 9W		3000K		
.....		3500K		
CRI>90		4000K		
.....	double arm	2700K	20	<b>T024</b>
LED 9W		3000K		
.....		3500K		
CRI>90		4000K		
.....	long arm	2700K	20	<b>T053</b>
LED 9W		3000K		
.....		3500K		
CRI>90		4000K		
.....	swivel arm	2700K	20	<b>T009</b>
LED 9W		3000K		
.....		3500K		
CRI>90		4000K		
PERLA ULTRA MINI		CCT	IP	CODE
.....	straight arm	2700K	20	<b>T042</b>
LED 4W		3000K		
.....		3500K		
CRI>90		4000K		

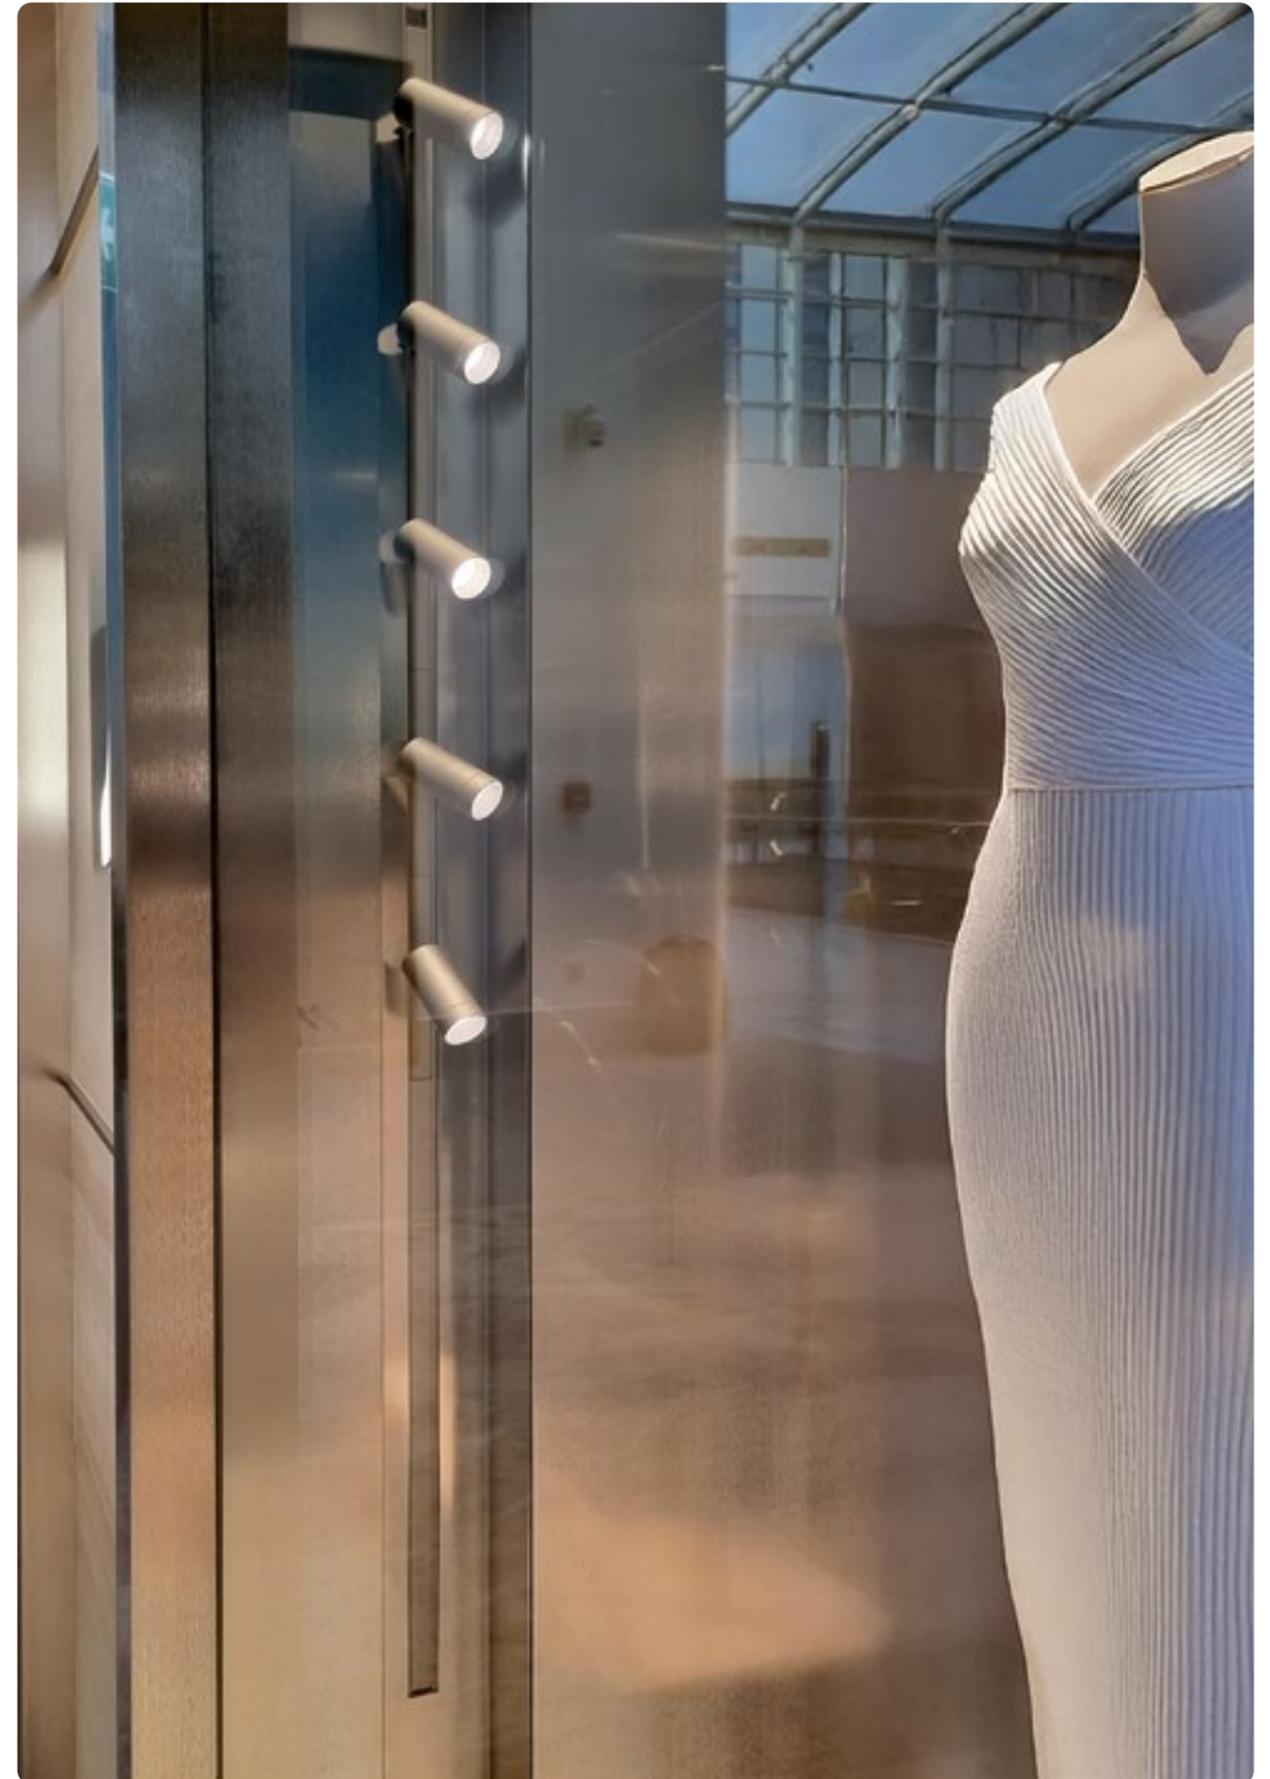

# Easy Neo TRACK



Spotlight mounted on high voltage track with adjustable light.



**DESCRIPTION**

Track-mounted spotlight Easy Neo for demanding applications on 230V tracks.

High output and consistent performance.

Snap-in mounting and interchangeable optics support flexible layouts and expressive layered lighting.

**INTENDED USE**

Used in ceiling and corridors for precise, unobtrusive accent lighting in architectural and retail environments.

**FINISHES**

Available in black finish.

Available in white finish.

Available in grey finish.


Available on request finish.




# Easy Neo TRACK LENS

230 V

(mm)

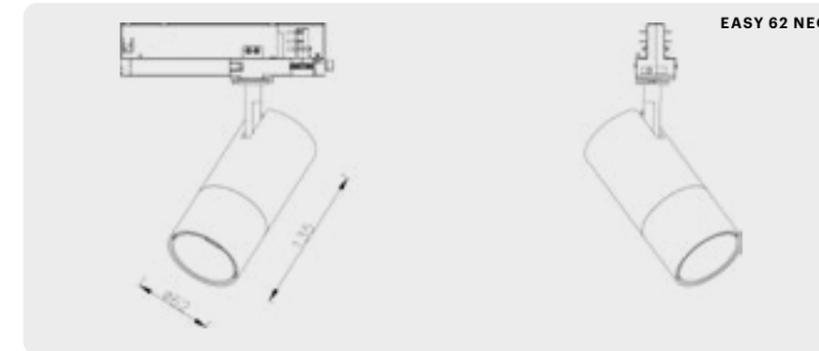

**ILLUMINANCE**  
25W 4000k 18°:  
2136lm | 85lm/W

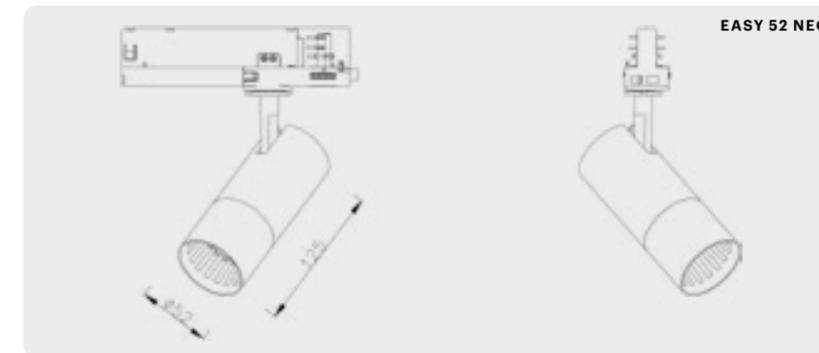

18W 4000k 18°:  
1585lm 88lm/W

<b>EASY 62 NEO</b>		<b>CCT</b>	<b>IP</b>	<b>CODE</b>
Available with ghost adapter.	..... straight arm	2700K	20	<b>T022</b>
	..... LED 25W	3000K		
	..... CRI>90	3500K		
..... double arm	..... LED 25W	2700K	20	<b>T027</b>
	..... CRI>90	3000K		
	..... track-magnet	3500K		
..... LED 18W	..... CRI>90	2700K	20	<b>T016</b>
	.....	3000K		
	.....	3500K		
..... LED 18W	..... CRI>90	2700K	20	<b>T056</b>
	.....	3000K		
	.....	3500K		
Available with ghost adapter.	..... double arm	2700K	20	<b>T090</b>
	..... LED 18W	3000K		
	..... CRI>90	3500K		
.....	.....	2700K	20	<b>T090</b>
..... LED 18W	3000K			
..... CRI>90	3500K			
.....	.....	2700K	20	<b>T090</b>
..... LED 18W	3000K			
..... CRI>90	3500K			



# Lite TRACK



Straight arm potlight on high voltage track with adjustable light.



**DESCRIPTION**

230V track-mounted spotlights available in two sizes, Lite 70 and Lite 80.

Clean design and different color temperatures available -support accent and general lighting.

**INTENDED USE**

Retail, offices and hospitality environments, suitable for balanced and discreet lighting applications.

**STRAIGHT ARM**



**FINISHES**

Available in black finish.

Available in white finish.


Available on request finish.

# Lite TRACK


230 V

(mm)

**ILLUMINANCE**

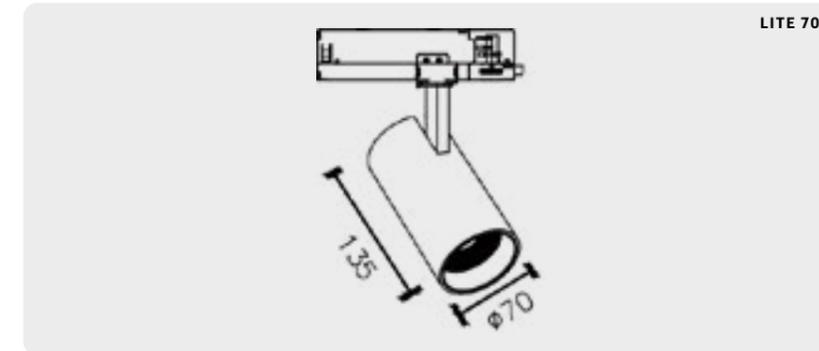

20W 3500k 24°:  
1850lm 92lm/W

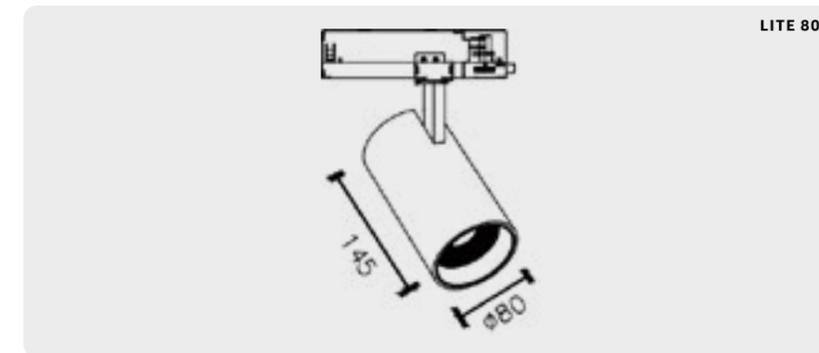

30W 3500k 24°:  
2866lm 95lm/W

LITE 70		CCT	IP	CODE
	straight arm	2700K	20	T200
	LED 20W	3000K		
	CRI>90	3500K		
		4000K		
LITE 80		CCT	IP	CODE
	straight arm	2700K	20	T201
	LED 30W	3000K		
	CRI>90	3500K		
		4000K		

# Perla TRACK



Compact spotlight mounted on high voltage track with adjustable light.



### DESCRIPTION

Track-mounted spotlight expressing the refined language of the Perla family on 230V systems. Compact, versatile form with plastic lenses ensuring clarity, visual comfort and controlled, layered lighting.

Straight and double arm options.

### INTENDED USE

Ceiling-mounted track systems and modular lighting structures, for architectural and high-end retail environments.



### FINISHES



- Available in black finish.
- Available in white finish.
- Available in grey finish.
- Available on request finish.

# Perla TRACK

230 V

(mm)

ILLUMINANCE

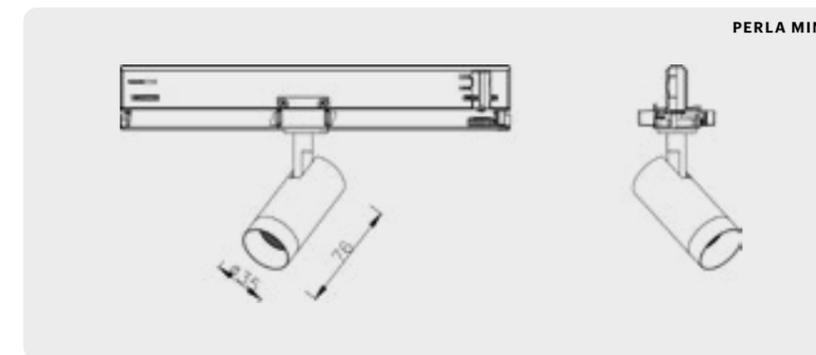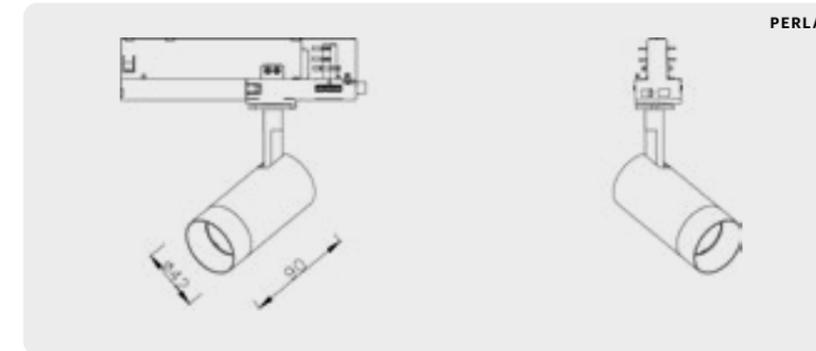

9W 3500k 20°:  
552lm 79lm/W

PERLA		CCT	IP	CODE
Available with ghost adapter.	straight arm	2700K	20	T038
	.....	3000K		
	.....	3500K		
	.....	4000K		
	double arm	2700K	20	T040
	.....	3000K		
.....	3500K			
.....	4000K			

PERLA MINI		CCT	IP	CODE
Available with ghost adapter.	straight arm	2700K	20	T023
	.....	3000K		
	.....	3500K		
	.....	4000K		
	double arm	2700K	20	T061
	.....	3000K		
.....	3500K			
.....	4000K			

# Savannah TRACK



Versatile ceiling high voltage track lighting system.



## DESCRIPTION

Savannah is a premium ceiling track light engineered for optimal efficiency and impact in retail and commercial settings.

Available in a range of color temperatures and beam angles, Savannah delivers outstanding color rendering, ensuring products and displays are showcased in their best light.

## INTENDED USE

Can be used with a recessed or surfaced mounted track. Ideal for retail, offices, hospitality, and commercial spaces.

## FINISHES



Available in black and white finish.



# Savannah TRACK



(mm)

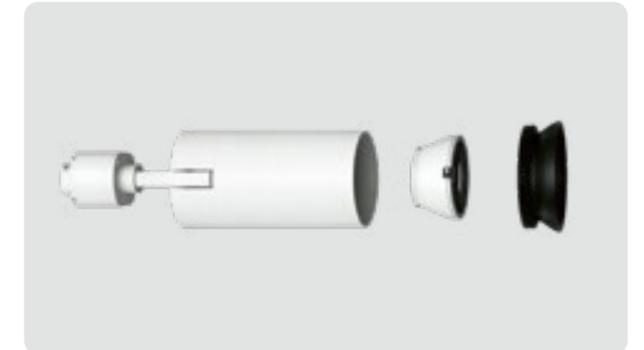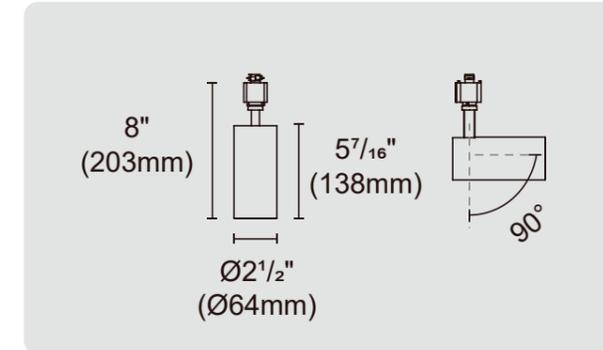

## SWITCHING AND CONTROL SYSTEMS

### WITHOUT SWITCHING SYSTEM

On-off control via switched outlet.

Can be used with Smart control solutions, transmitters or hardwired switching systems for On-off and dimming.



## POWER SUPPLY

Built-in 350mA TRIAC driver.

SAVANNAH		BEAM ANGLE	CCT	FINISH	CODE
MONO Light Source.	350mA	25°	3500K	03 black	504800001
Dimmable.	LED 15W			01 white	504800002

SAVANNAH TRACK		SYSTEM	LENGTH	FINISH	CODE
Halo track system.	350mA	Single Circuit Track, 3-Wire	1000 mm (3.28 ft.)	03 black	752201238
120 V.	LED 15W			01 white	752201235
			2000 mm (6.56 ft.)	03 black	752201239
				01 white	752201236
			3000 mm (9.84 ft.)	03 black	752201240
				01 white	752201237

## SAVANNAH ACCESSORIES

Halo track components.\*

Connectors, power feed, end caps.

\* North America only. For European applications a different track system is required.

COMPONENT TYPE	FINISH	CODE
End cap / closure head	03 black	753802066
	01 white	753802067
Electrical head	03 black	943800140
	01 white	943800141
Straight connector	03 black	750300286
	01 white	750300287
Straight connector (concealed)	03 black	940700015
	01 white	940700016
L Joint	03 black	750300284
	01 white	750300285
T Joint	03 black	750300272
	01 white	750300273
X Joint	03 black	750300274
	01 white	750300275
Suspension cable kit	03 black	600800036
	01 white	600800037

# Zenius Sooter



Recessed spotlight for precise accent lighting and glare control.



**DESCRIPTION**

Recessed spotlight with deep snoot for tight beam control and ultra-low glare.


Available in three sizes with trim or trimless edges, round or square fronts and modular accessories

**INTENDED USE**

Accent lighting for fitting rooms and retail environments.

**FINISHES**


- Available in black finish.
- Available in white finish.
- Available in grey finish.
- Available on request finish.

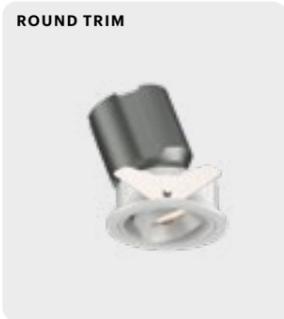


# Zenius Sooter

(mm)


ILLUMINANCE

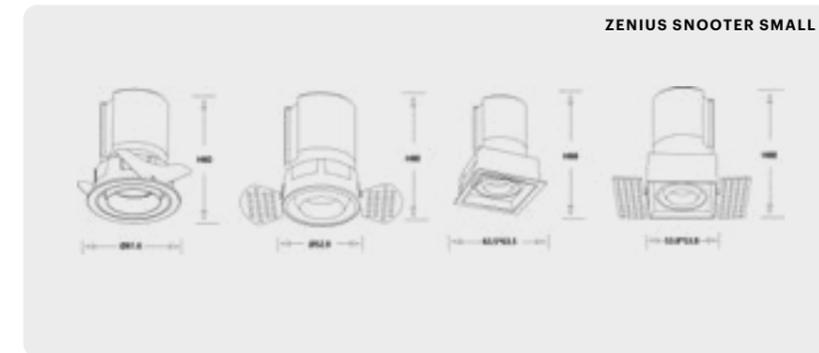

7W 3500k 24°:  
582lm 83lm/W

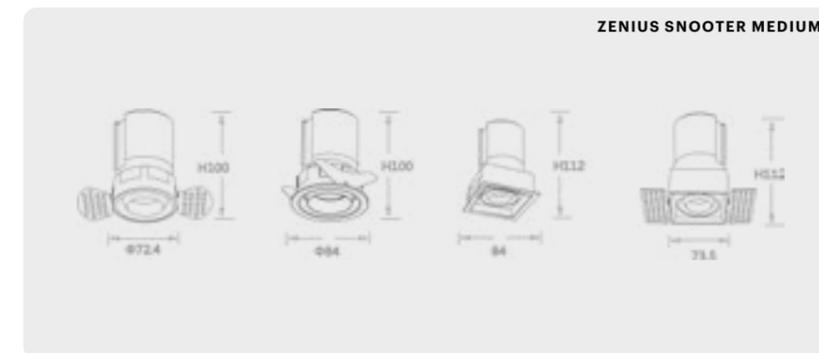

20W 3500k 24°:  
2021lm 101lm/W

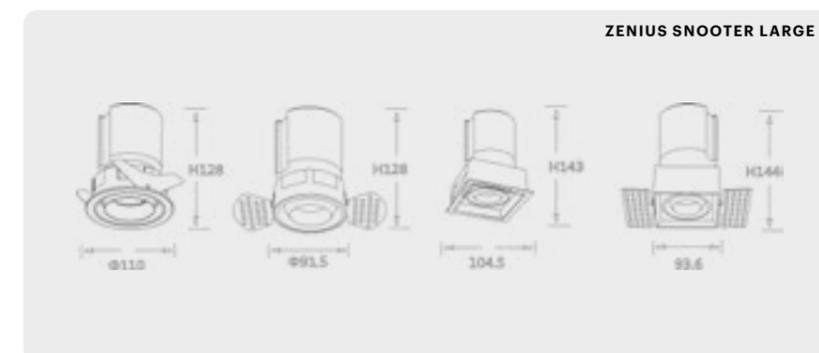

30W 3500k 20°:  
3015lm 100lm/W

ZENIUS SNOOTER SMALL	CCT	IP	CODE
..... round trim	2700K	20/44	R015
LED 7W	3000K		
.....	3500K		
CRI>90	4000K		
..... round trimless	2700K	20/44	R016
LED 7W	3000K		
.....	3500K		
CRI>90	4000K		
..... square trim	2700K	20/44	R017
LED 7W	3000K		
.....	3500K		
CRI>90	4000K		
..... square trimless	2700K	20/44	R018
LED 7W	3000K		
.....	3500K		
CRI>90	4000K		

# Zenius Snooter

<b>ZENIUS SNOOTER MEDIUM</b>		<b>CCT</b>	<b>IP</b>	<b>CODE</b>
.....	round trim	2700K	20/44	<b>R019</b>
LED 20W		3000K		
.....		3500K		
CRI>90		4000K		
.....	round trimless	2700K	20/44	<b>R020</b>
LED 20W		3000K		
.....		3500K		
CRI>90		4000K		
.....	square trim	2700K	20/44	<b>R021</b>
LED 20W		3000K		
.....		3500K		
CRI>90		4000K		
.....	square trimless	2700K	20/44	<b>R022</b>
LED 20W		3000K		
.....		3500K		
CRI>90		4000K		
<b>ZENIUS SNOOTER LARGE</b>		<b>CCT</b>	<b>IP</b>	<b>CODE</b>
.....	round trim	2700K	20/44	<b>R023</b>
LED 30W		3000K		
.....		3500K		
CRI>90		4000K		
.....	round trimless	2700K	20/44	<b>R024</b>
LED 30W		3000K		
.....		3500K		
CRI>90		4000K		
.....	square trim	2700K	20/44	<b>R025</b>
LED 30W		3000K		
.....		3500K		
CRI>90		4000K		
.....	square trimless	2700K	20/44	<b>R026</b>
LED 30W		3000K		
.....		3500K		
CRI>90		4000K		



# Zenius Washer



Recessed luminaire designed for even wall washing illumination.




**DESCRIPTION**

Recessed wall-wash solution delivering soft, even illumination on vertical and horizontal planes. Available in three sizes, two shapes with trim or trimless edges and interchangeable reflector.

**INTENDED USE**

Wall washing for surfaces and objects, creating uniform light distribution and refined spatial definition.

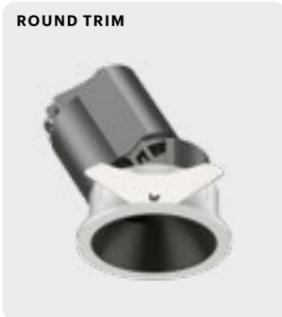


**FINISHES**

Available in black finish.  
Available in white finish.  
Available in grey finish.  
Available on request finish.


# Zenius Washer

(mm)

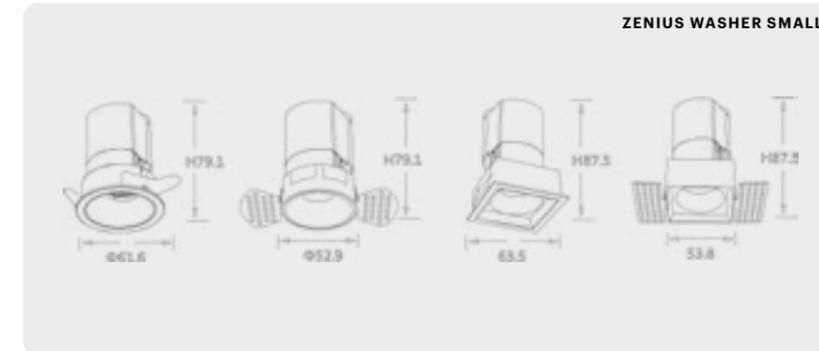


**ILLUMINANCE**

7W 3500k 24°:  
420lm 60lm/W

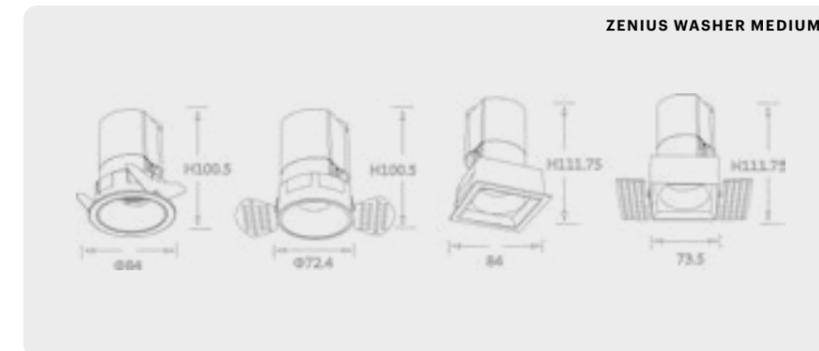

12W 3500k 24°:  
752lm 63lm/W

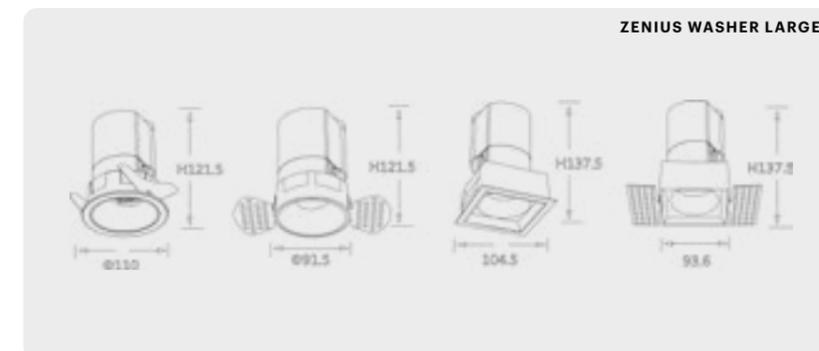

20W 3500k 24°:  
1570lm 79lm/W

**ZENIUS SNOOTER SMALL**

	CCT	IP	CODE
..... round trim	2700K	20	<b>R027</b>
LED 7W	3000K		
.....	3500K		
CRI>90	4000K		
..... round trimless	2700K	20	<b>R028</b>
LED 7W	3000K		
.....	3500K		
CRI>90	4000K		
..... square trim	2700K	20	<b>R029</b>
LED 7W	3000K		
.....	3500K		
CRI>90	4000K		
..... square trimless	2700K	20	<b>R030</b>
LED 7W	3000K		
.....	3500K		
CRI>90	4000K		

# Zenius Washer


<b>ZENIUS SNOOTER MEDIUM</b>		<b>CCT</b>	<b>IP</b>	<b>CODE</b>
.....	round trim	2700K	20	<b>R031</b>
LED 12W		3000K		
.....		3500K		
CRI>90		4000K		
.....	round trimless	2700K	20	<b>R032</b>
LED 12W		3000K		
.....		3500K		
CRI>90		4000K		
.....	square trim	2700K	20	<b>R033</b>
LED 12W		3000K		
.....		3500K		
CRI>90		4000K		
.....	square trimless	2700K	20	<b>R034</b>
LED 12W		3000K		
.....		3500K		
CRI>90		4000K		
<b>ZENIUS SNOOTER LARGE</b>		<b>CCT</b>	<b>IP</b>	<b>CODE</b>
.....	round trim	2700K	20	<b>R035</b>
LED 30W		3000K		
.....		3500K		
CRI>90		4000K		
.....	round trimless	2700K	20	<b>R036</b>
LED 30W		3000K		
.....		3500K		
CRI>90		4000K		
.....	square trim	2700K	20	<b>R037</b>
LED 30W		3000K		
.....		3500K		
CRI>90		4000K		
.....	square trimless	2700K	20	<b>R038</b>
LED 30W		3000K		
.....		3500K		
CRI>90		4000K		



# Perla RECESSED



Trim or trimless recessed mounted spotlight.

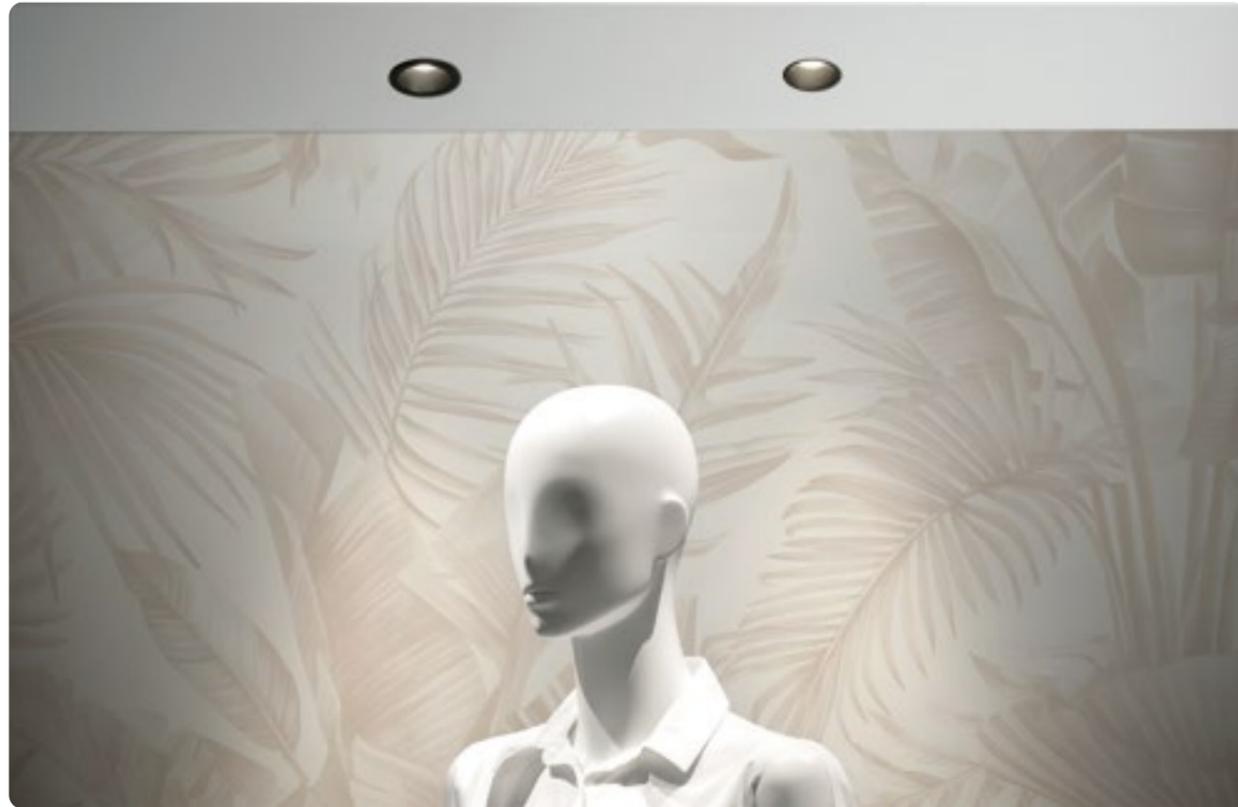

## DESCRIPTION

Perla trim and trimless are recessed spotlights designed to keep the ceiling visually clean and continuous. Trim features a subtle bezel, while trimless integrates flush into plasterboard for a seamless architectural finish.


## INTENDED USE

Ceiling passages, corridors and galleries where discreet, uniform lighting guides movement and orientation.

### TRIM



### TRIMLESS


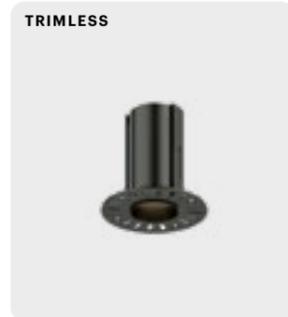


## FINISHES

- Available in black finish.
- Available in white finish.
- Available in grey finish.
- Available on request finish.

# Perla RECESSED

(mm)

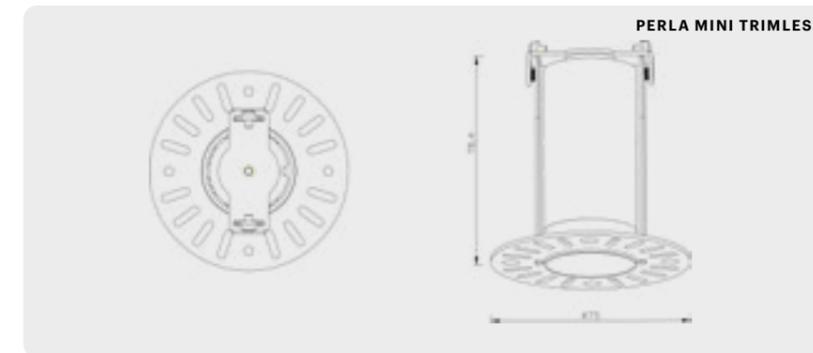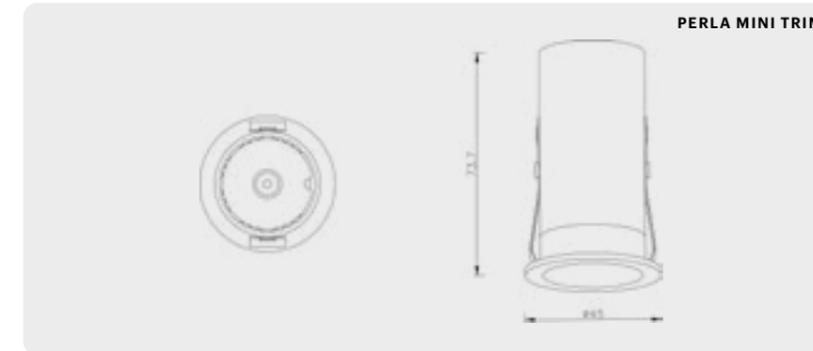

## ILLUMINANCE

9W 3500k 20°:  
552lm 79lm/W

## PERLA MINI

		CCT	IP	CODE
	trim	2700K	20	R003
LED 9W		3000K		
CRI>90		4000K		
	trimless	2700K	20	R004
LED 9W		3000K		
CRI>90		4000K		

# Glow



Recessed mounted spotlight designed for full architectural integration.



**DESCRIPTION**

Minimal recessed luminaire designed to disappear into architecture or present a slim, refined presence.

Compact body with cube-shaped aperture, integrated LED and clean, edge-free geometry ensure consistent, efficient output.

**INTENDED USE**

Ceilings, suspended ceiling, counters and passageways. Ideal for spaces where purity of form and visual calm are essential.



**FINISHES**

- Available in black finish.
- Available in white finish.
- Available in grey finish.
- Available on request finish.

# Glow


(mm)

**ILLUMINANCE**

(mm)	ILLUMINANCE
<p><b>GLOWLINE 3LED</b></p>	<p>6W 4000k 50°: 334lm 56lm/W</p>
<p><b>GLOWLINE 6LED</b></p>	<p>14W 4000k 50°: 969lm 69lm/W</p>
<p><b>GLOWLINE 9LED</b></p>	<p>20W 4000k 50°: 1496lm 75lm/W</p>
<p><b>GLOWQUBE</b></p>	<p>8W 4000k 50°: 712lm 89lm/W</p>

# Glow

GLOWLINE		CCT	IP	CODE
.....	3LED	2700K	20	R041
LED 6W		3000K		
.....		3500K		
CRI>90		4000K		
.....	6LED	2700K	20	R042
LED 14W		3000K		
.....		3500K		
CRI>90		4000K		
.....	9LED	2700K	20	R043
LED 20W		3000K		
.....		3500K		
CRI>90		4000K		
GLOWQUBE		CCT	IP	CODE
.....	4LED	2700K	20	R050
LED 8W		3000K		
.....		3500K		
CRI>90		4000K		

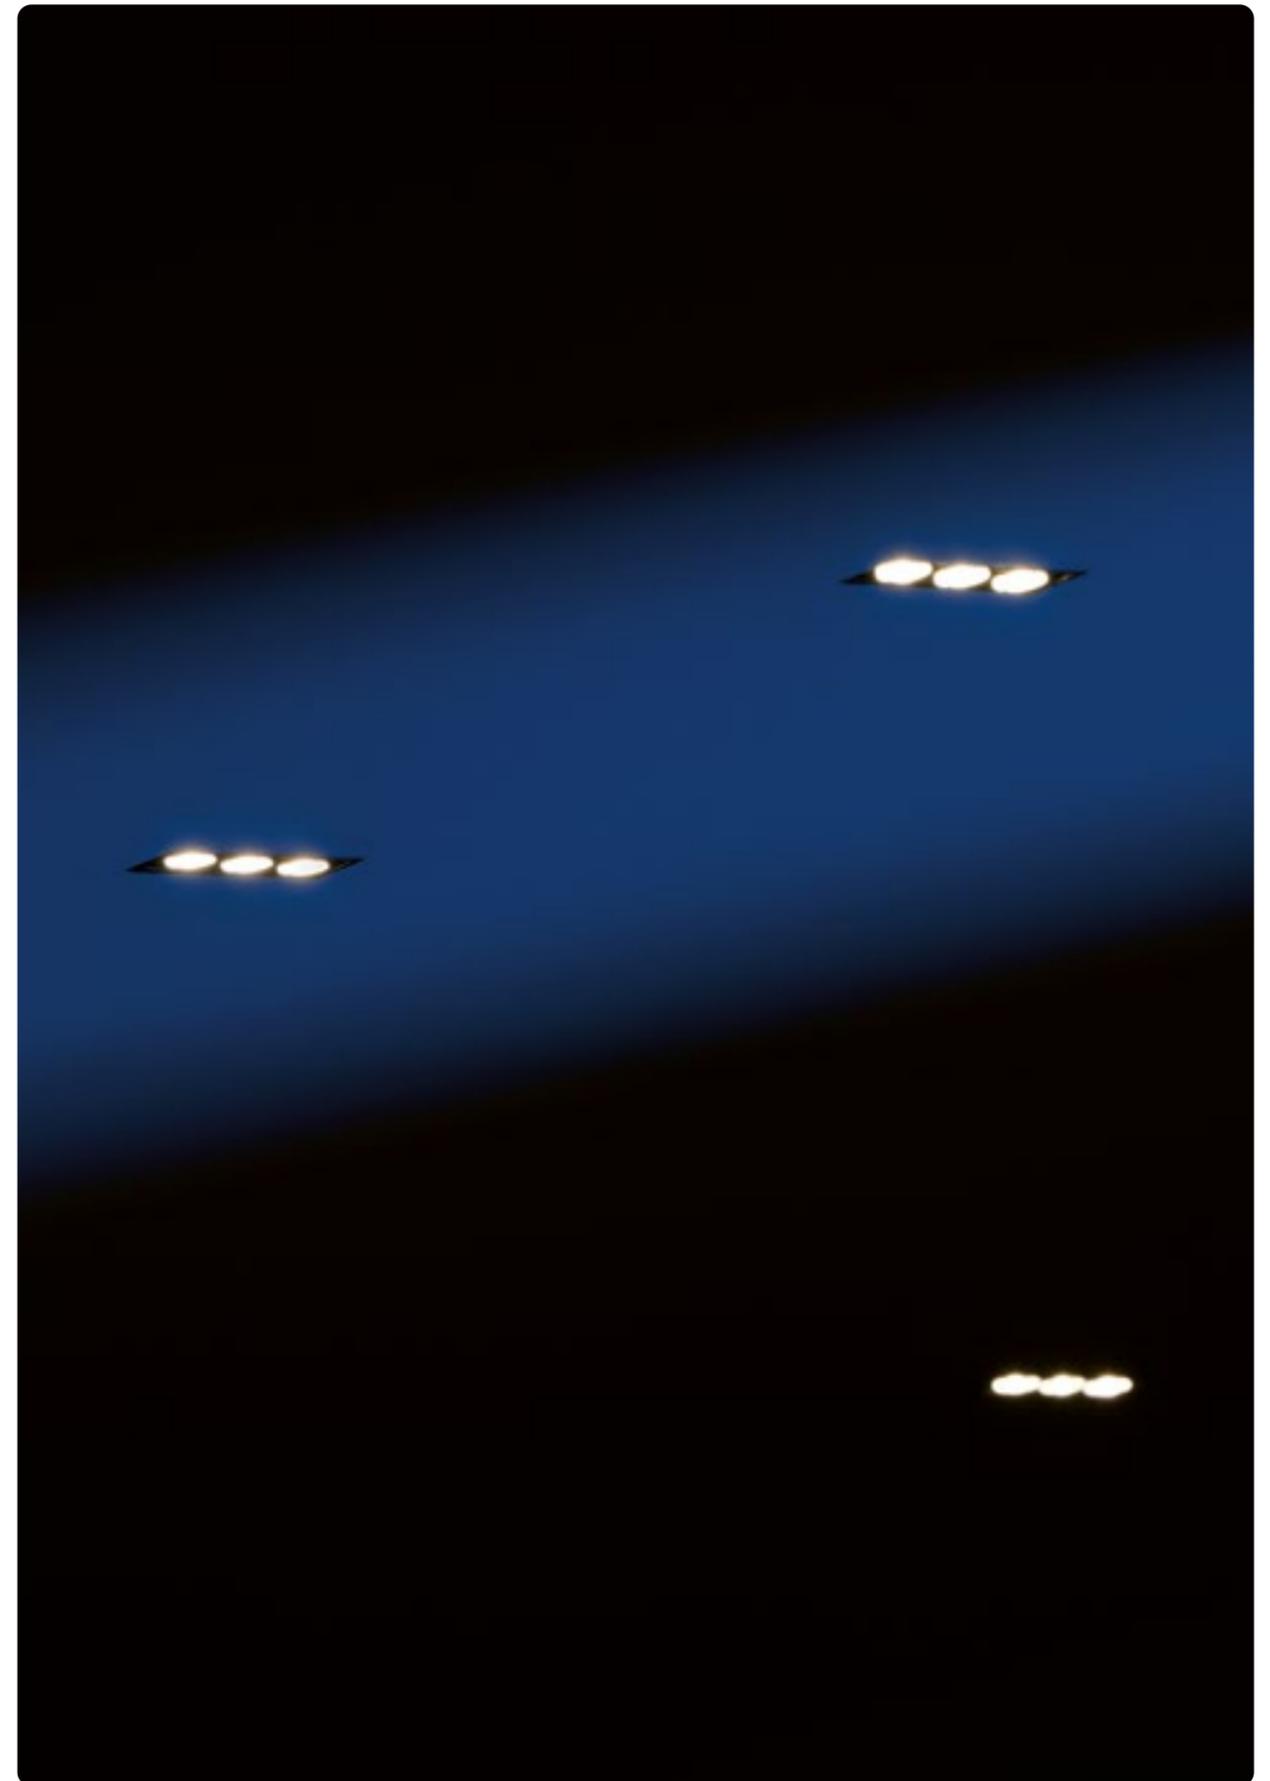

# Jero



Recessed-mounted spotlight with adjustable light beam.



**DESCRIPTION**

Recessed spotlight designed for balanced performance and visual comfort.  
Compact form factor with clean integration into ceilings.  
Available in different color temperatures.

**INTENDED USE**

Ceilings, suitable for general and accent lighting in architectural and retail environments.




**FINISHES**

Available in black finish.  
Available in white finish.  
Available in grey finish.  
Available on request finish.

# Jero

(mm)

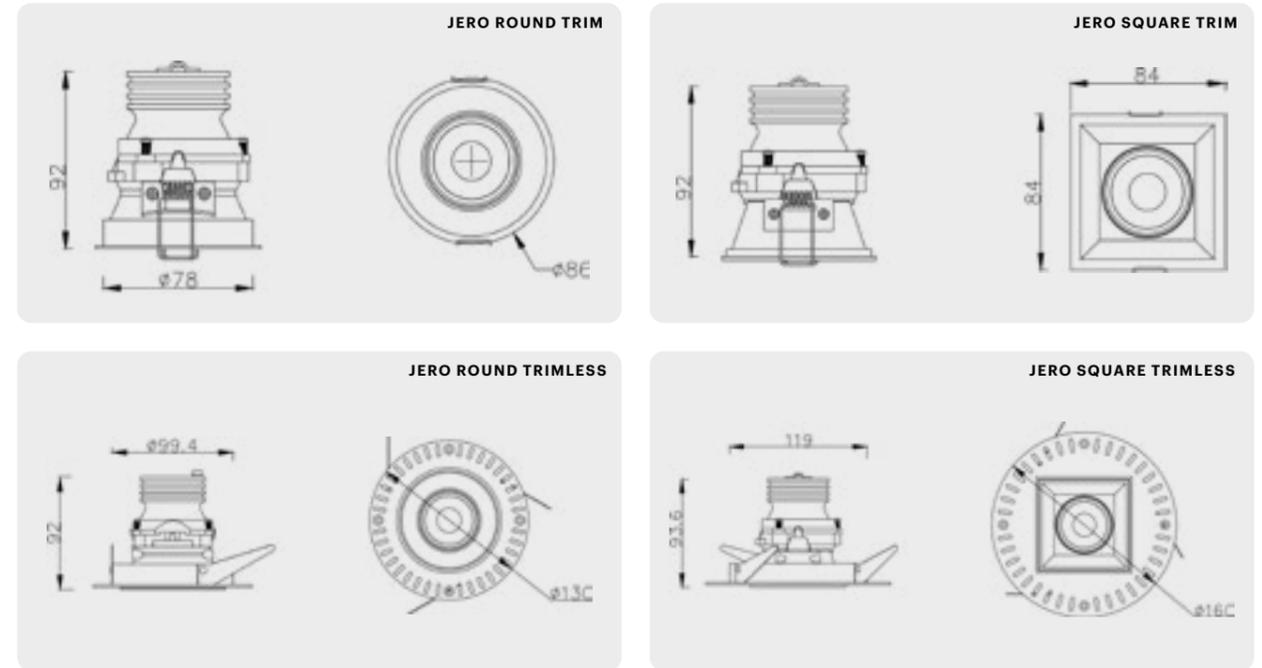

JERO		CCT	IP	CODE
	round trim	2700K	20	<b>R085</b>
LED 15W		3000K		
CRI>90		3500K		
	round trimless	2700K	20	<b>R087</b>
LED 15W		3000K		
CRI>90		3500K		
	square trim	2700K	20	<b>R086</b>
LED 15W		3000K		
CRI>90		3500K		
	square trimless	2700K	20	<b>R088</b>
LED 15W		3000K		
CRI>90		3500K		

# Lys



Recessed mounted spotlight with adjustable light direction.



**DESCRIPTION**

Recessed, adjustable spotlight designed for balanced performance and visual comfort support flexible lighting applications.

**INTENDED USE**

Ceilings, passageways and corridors, suitable for general and accent lighting in architectural and retail environments.




**FINISHES**

- Available in black finish.
- Available in white finish.
- Available in grey finish.
- Available on request finish.

# Lys

(mm)

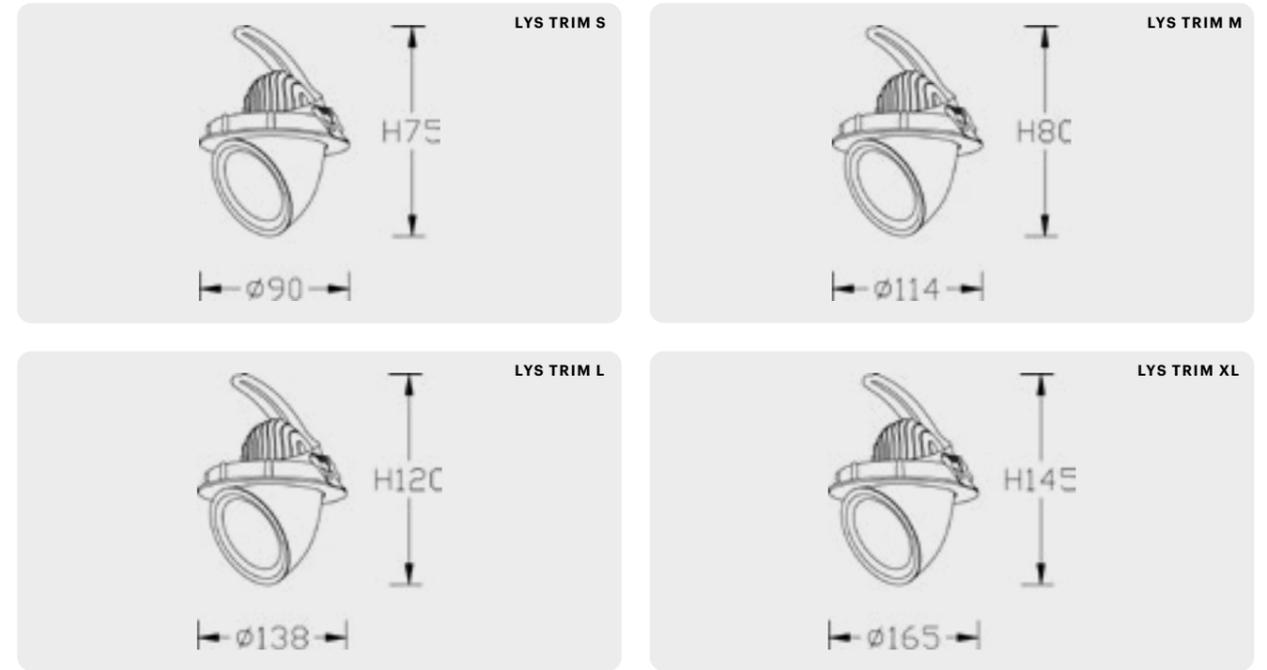

LYS		CCT	IP	CODE
	S	2700K 3000K 3500K 4000K	20	R103
	M	2700K 3000K 3500K 4000K	20	R104
	L	2700K 3000K 3500K 4000K	20	R105
	XL	2700K 3000K 3500K 4000K	20	R106

# Zint



IP65 recessed mounted spotlight with fixed light beam.



**DESCRIPTION**

Recessed spotlight available in four sizes, designed for balanced performance and visual comfort. Compact form factor with clean ceiling integration for discreet architectural lighting.

**INTENDED USE**

Ceilings in corridors, suitable for uniform and comfortable lighting in architectural and retail environments.




**FINISHES**

Available in black finish.  
Available in white finish.  
Available on request finish.

# Zint

(mm)

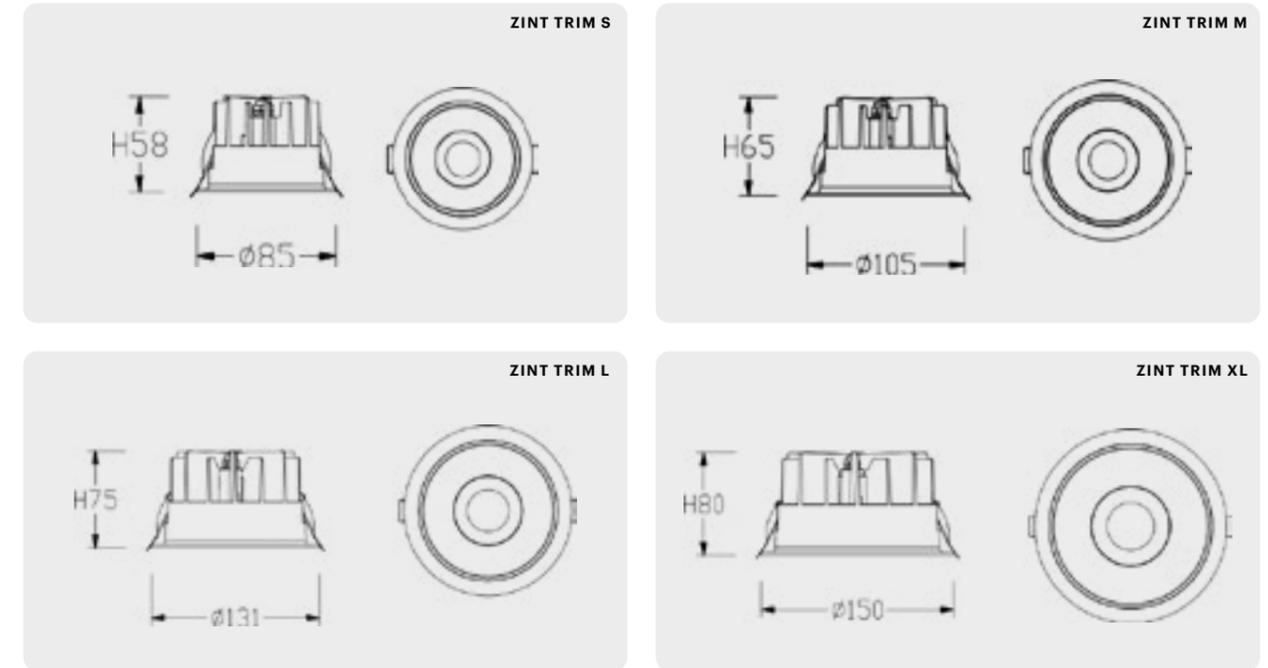

ZINT	CCT	IP	CODE
S	2700K 3000K 3500K 4000K	65	R089
M	2700K 3000K 3500K 4000K	65	R090
L	2700K 3000K 3500K 4000K	65	R091
XL	2700K 3000K 3500K 4000K	65	R092

# Eye Cube



Recessed spotlight with adjustable light beam.



**DESCRIPTION**

Square recessed ceiling spotlight designed for calm, continuous surfaces.

Pure geometry with flush integration into plaster or panels, available trimless.

Deep cut-off optics ensure precise light and low glare.

**INTENDED USE**

Retail, hospitality and refined residential spaces, supporting layered lighting schemes from accent to soft wash.




**FINISHES**

- Available in black finish.
- Available in white finish.
- Available in grey finish.
- Available on request finish.

# Eye Cube

(mm)

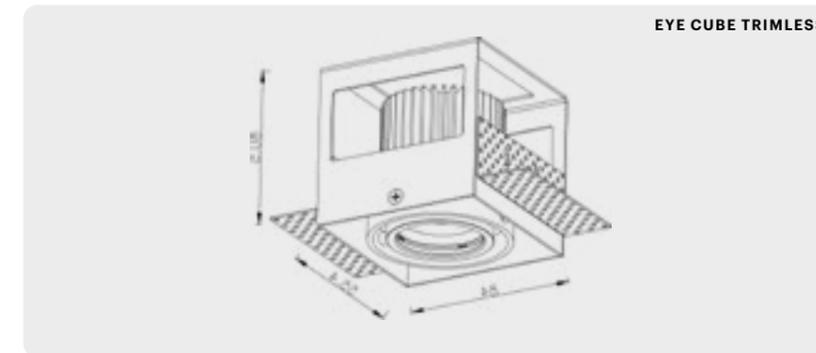

**EYE CUBE**

**CCT**

**IP**

**CODE**

- .....
- LED 13W
- .....
- CRI>90

- 2700K
- 3000K
- 3500K
- 4000K

20

R068

# Dahlia

Recessed adjustable ceiling light.



## DESCRIPTION

The DAHLIA is an elegant recessed ceiling light, featuring an adjustable head that can be easily positioned to illuminate any desired direction.

Complete with an integrated driver, this modern fixture is available in both black and white finishes.

## INTENDED USE

Ideal for recessed ceiling applications in retail and commercial spaces.

## FINISHES


Available in black and white finish.



# Dahlia



(mm)

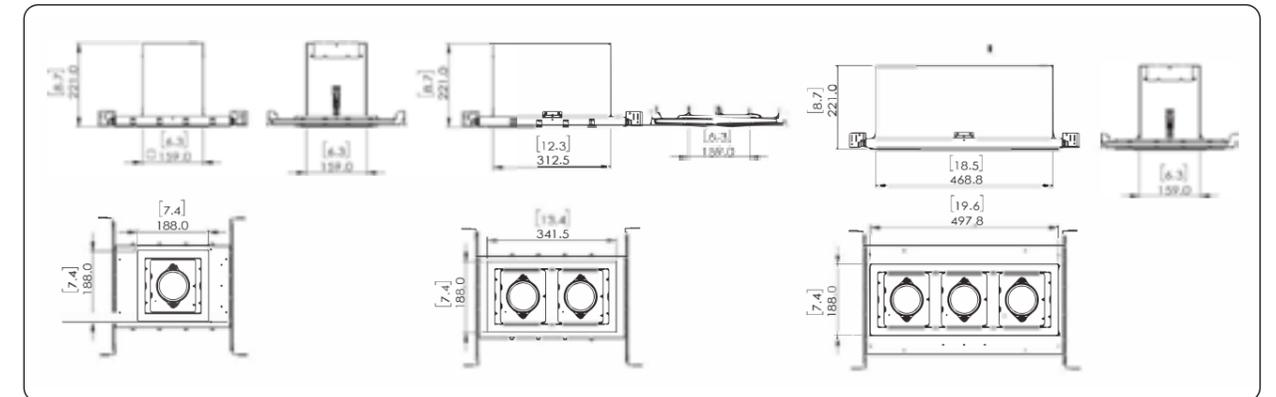

## SWITCHING AND CONTROL SYSTEMS

### WITHOUT SWITCHING SYSTEM

On-off control via switched outlet.  
Can be used with Smart control solutions, transmitters or hardwired switching systems for On-off and dimming.

## POWER SUPPLY

Built-in 500mA TRIAC driver.

## TRIAC DRIVER




DAHLIA		VERSION	CCT	FINISH	CODE
MONO Light Source.	500mA	1-head	3500K	03 black	504100017
Dimmable.	LED 22W			01 white	504100014
		2-head	3500K	03 black	504100018
	LED 44W			01 white	504100015
		3-head	3500K	03 black	504100019
	LED 66W			01 white	504100016

## NEW CONTRUSTION PLATE

New Construction Plate with Hanger Bars. Only required for new construction projects.

VERSION	DIMENSIONS	CODE
1-head	306.2 x 216.2 x 25 mm	600800026
2-head	389 x 216.2 x 25 mm	600800027
3-head	523 x 288 x 25 mm	600800028

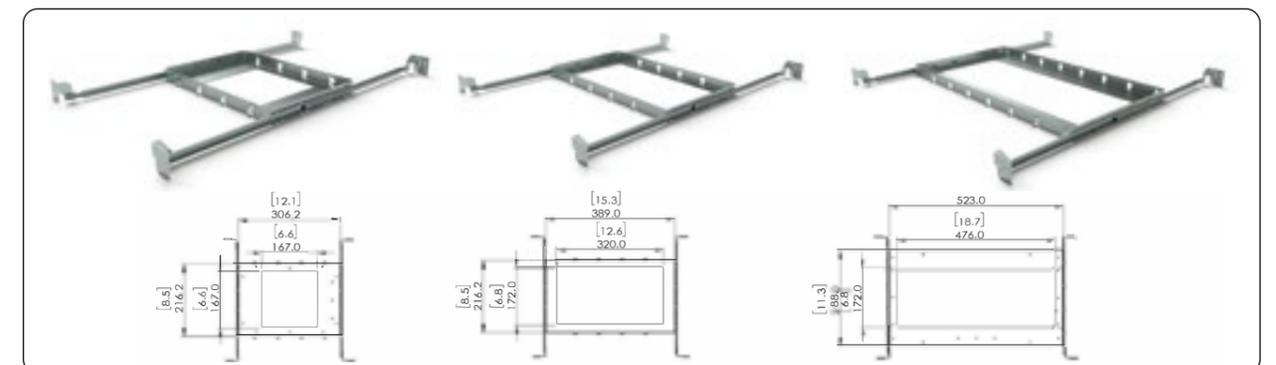

# Nimbus



Recessed or track mounted ceiling light with wall-wash effect.



## DESCRIPTION

Nimbus is a ceiling wall washer delivering high lumen output. Available as a recessed or track version, the wall washer comes with three different light distribution options and adapts easily to a wide range of lighting requirements. The fixture is dimmable via DALI, TRIAC, or 0-10V drivers and is suitable for use in damp locations, making it a reliable solution for both commercial and architectural applications.

## INTENDED USE

Wall-washer light for recessed installation or track system.

## FINISHES



Available in black and white finish.



# Nimbus



(mm)

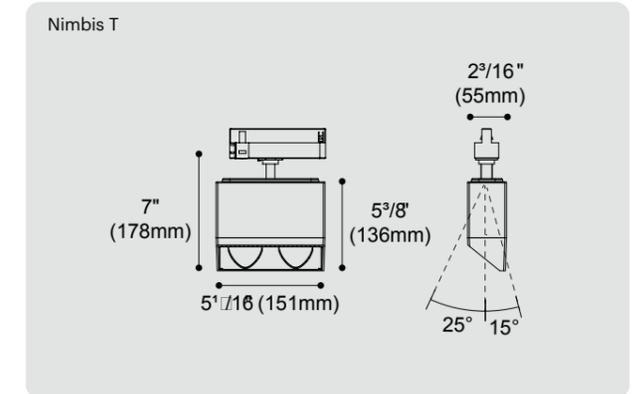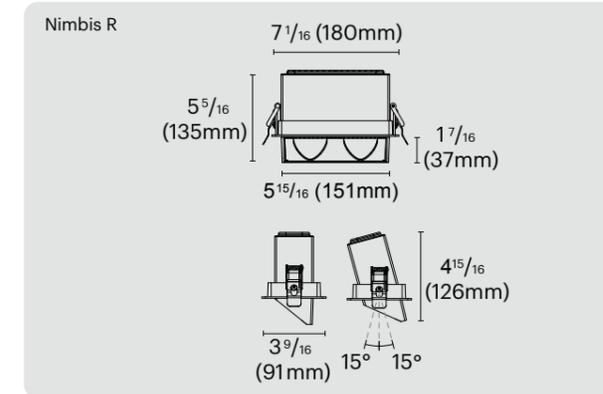

## SWITCHING AND CONTROL SYSTEMS

### WITHOUT SWITCHING SYSTEM

On-off control via switched outlet. Can be used with Smart control solutions, transmitters or hardwired switching systems for On-off and dimming.

## POWER SUPPLY

Built-in 700mA or 900mA TRIAC driver.

NIMBIS	VERSION	WALL WASH	CCT	FINISH	CODE	
MONO Light Source. Dimmable.	900mA LED 38W	Recessed	Shelf Floor	3500K	03 black 01 white	On request
			High Ceiling		03 black 01 white	
			Wide		03 black 01 white	
	700mA LED 25W	Track	Shelf Floor		03 black 01 white	
			High Ceiling		03 black 01 white	
			Wide		03 black 01 white	

# Easy Neo PULL IN/OUT



Semi-recessed spotlight system with pull-in pull-out movement.



**DESCRIPTION**

Recessed pull-in / pull-out mechanism that hides the spotlight inside a ceiling cylinder. The body can be pulled out to aim light where required, then retracted as needed.

**INTENDED USE**

For spaces requiring precise, adjustable lighting that disappears into the ceiling to maintain visual order.

**PULL IN/OUT**




**FINISHES**

- Available in black finish.
- Available in white finish.
- Available in grey finish.
- Available on request finish.


# Easy Neo PULL IN/OUT LENS

(mm)

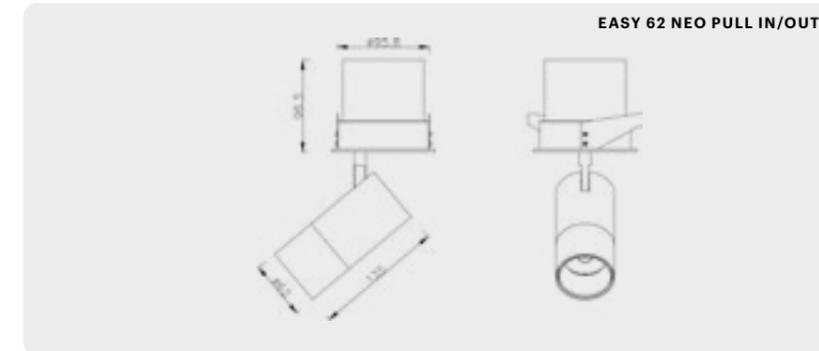

**ILLUMINANCE**

25W 4000k 18°:  
2136lm | 85lm/W

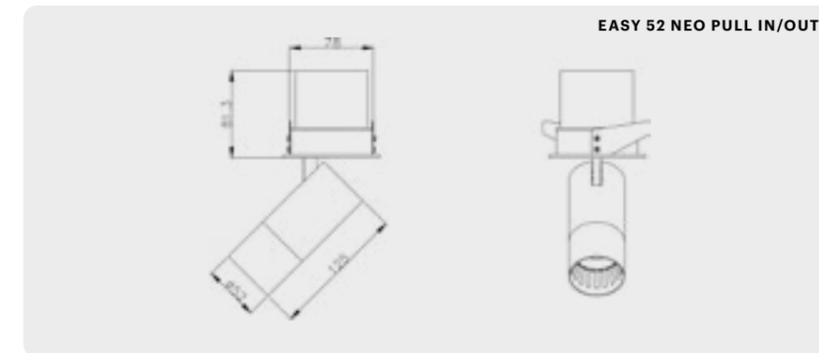



18W 4000k 18°:  
1585lm 88lm/W

EASY 62 NEO	CCT	IP	CODE
.....	2700K	20	R048
LED 25W	3000K		
CRI>90	3500K		
.....	4000K		
EASY 52 NEO	CCT	IP	CODE
.....	2700K	20	R045
LED 18W	3000K		
CRI>90	3500K		
.....	4000K		

# Easy Neo PULL IN/OUT REFLECTOR

(mm)

ILLUMINANCE

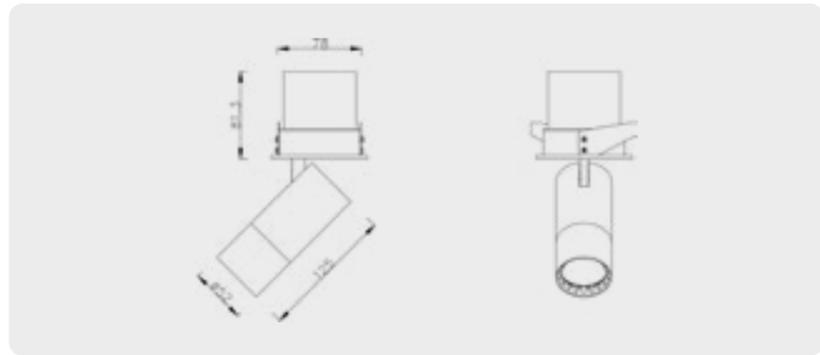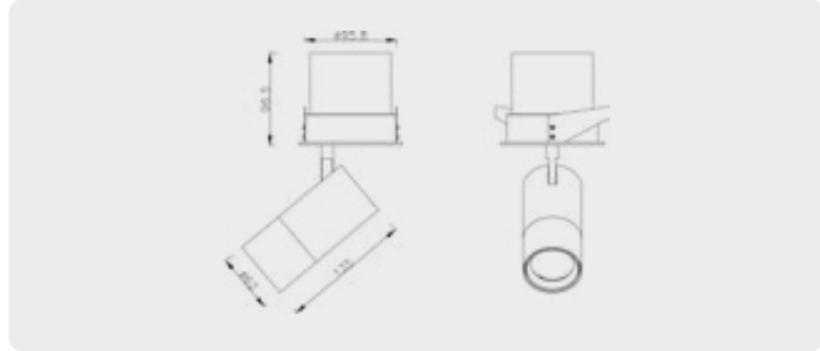

18W 4000K 18°:  
1724lm | 96lm/W

EASY 62 NEO	CCT	IP	CODE
.....	2700K	20	R049
LED 25W	3000K		
.....	3500K		
CRI>90	4000K		

EASY 52 NEO	CCT	IP	CODE
.....	2700K	20	R047
LED 18W	3000K		
.....	3500K		
CRI>90	4000K		



# Perla PULL IN/OUT



Semi-recessed spotlight that pulls out for adjustment.



**DESCRIPTION**

Recessed pull-in / pull-out system that conceals the spotlight within a ceiling cylinder.

The body extends for precise aiming, then retracts to restore a clean, continuous plane.

**INTENDED USE**

For architectural ceilings needing adjustable accent light while preserving a clean, continuous visual plane.




**FINISHES**

- Available in black finish.
- Available in white finish.
- Available in grey finish.
- Available on request finish.

# Perla PULL IN/OUT

(mm)

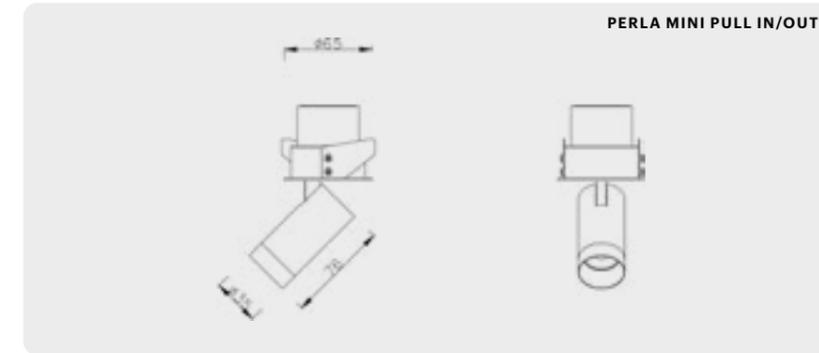

**ILLUMINANCE**

9W 3500k 20°:  
552lm 79lm/W

**PERLA MINI**

**CCT**

**IP**

**CODE**

LED 9W	2700K	20	R007
CRI>90	3000K		
	3500K		
	4000K		

# Perla DIRECTABLE



Semi-recessed mounted spotlight with directable light.




**DESCRIPTION**

Perla Directable is a semi-recessed adjustable spotlight that preserves a clean ceiling plane through a discreet integrated housing.

The body tilts and rotates to deliver precise, controlled accent lighting.

**INTENDED USE**

Intended for lighting niches and ceiling corners where discreet, adjustable accent light is required without visual clutter.

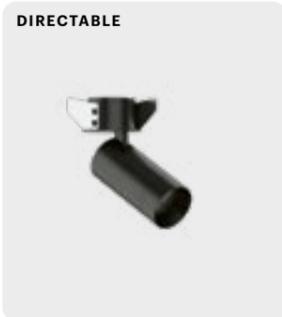



**FINISHES**

- Available in black finish.
- Available in white finish.
- Available in grey finish.
- Available on request finish.

# Perla DIRECTABLE

(mm)

ILLUMINANCE

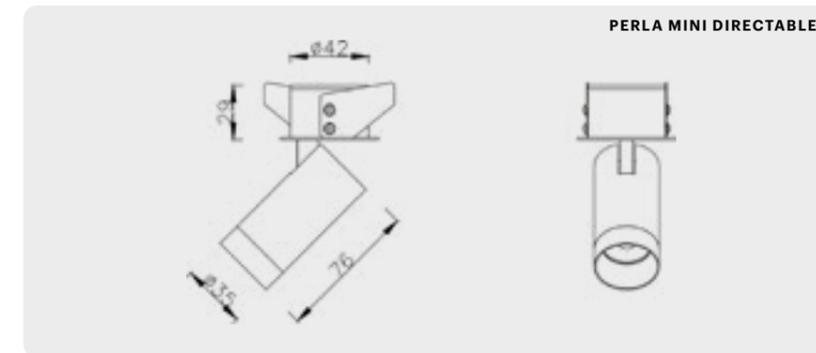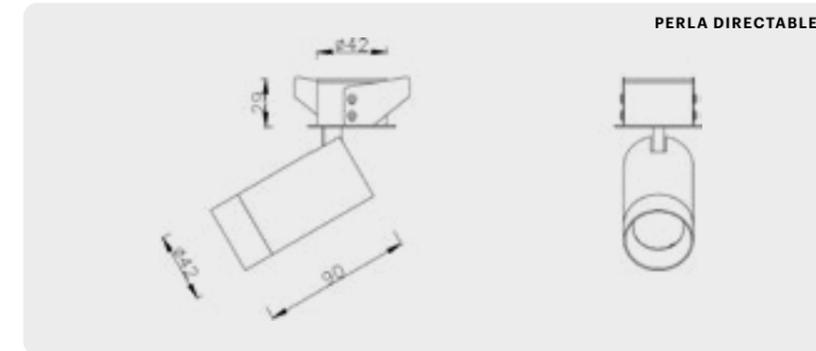

9W 3500k 20°:  
552lm 79lm/W

PERLA	CCT	IP	CODE
.....	2700K	20	R052
LED 12W	3000K		
CRI>90	3500K		
	4000K		
PERLA MINI	CCT	IP	CODE
.....	2700K	20	R008
LED 9W	3000K		
CRI>90	3500K		
	4000K		

# Perla BUILT IN



Surface-mounted spotlight with integrated driver.



**DESCRIPTION**

Perla Built-In is a surface-mounted spotlight with an integrated driver for simplified installation.

It delivers precise, controlled illumination while maintaining a calm, minimal architectural presence.

**INTENDED USE**

Retail spaces or historic buildings with limited installation options, where discreet, precise lighting is required.




**FINISHES**

- Available in black finish.
- Available in white finish.
- Available in grey finish.
- Available on request finish.

# Perla BUILT IN

(mm)

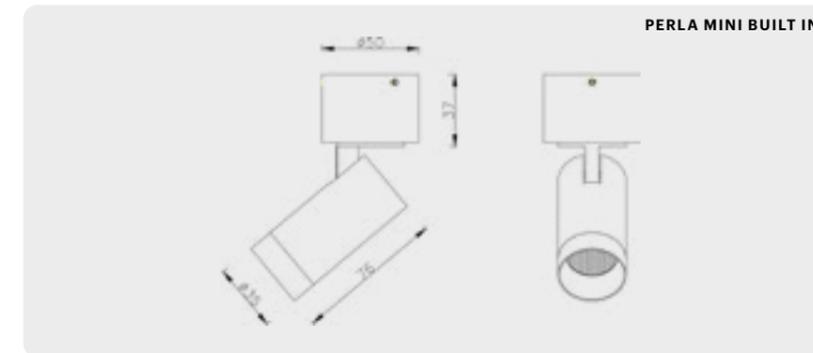

**ILLUMINANCE**

9W 3500k 20°:  
552lm 79lm/W

PERLA MINI	CCT	IP	CODE
.....	2700K	20/44	S001
LED 9W	3000K		
.....	3500K		
CRI>90	4000K		

# Glowqube SURFACE



Surface-mounted luminaire with fixed light beam.



**DESCRIPTION**

Minimal surface-mounted luminaire with a compact body and cube-shaped aperture.

Integrated LED ensures consistent output, high efficiency and long-term, low-maintenance performance.

**INTENDED USE**

Ceilings. Suitable for general and accent lighting in architectural and retail environments.

**SURFACE**




**FINISHES**

- Available in black finish.
- Available in white finish.
- Available in grey finish.
- Available on request finish.

# Glowqube SURFACE

(mm)

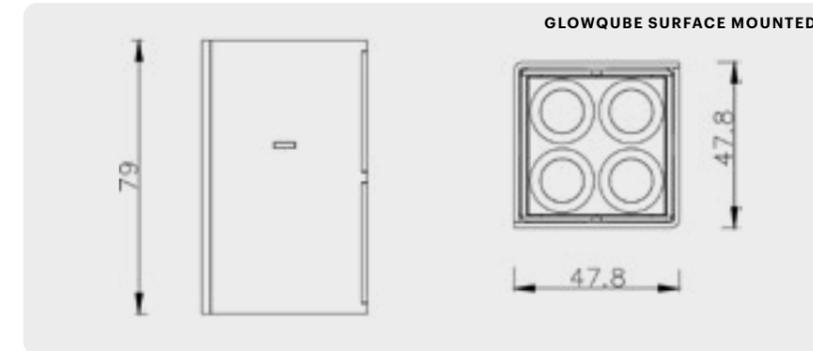

**ILLUMINANCE**

8W 4000k 50°:  
712lm 89lm/W

**GLOWQUBE**

.....	2700K	IP 20	CODE R039
.....	3000K		
LED 8W	3500K		
.....	4000K		
CRI>90			

# Numio



Minimal surface mounted spotlight with fixed light beam.



**DESCRIPTION**

Surface-mounted spotlight designed for balanced performance and visual comfort. Compact form factor with clean ceiling integration. Available in different color temperatures.

**INTENDED USE**

Ceiling applications, suitable for general and accent lighting in architectural and retail environments.




**FINISHES**

Available in black finish.  
Available in white finish.  
Available in grey finish.  
Available on request finish.

# Numio

(mm)

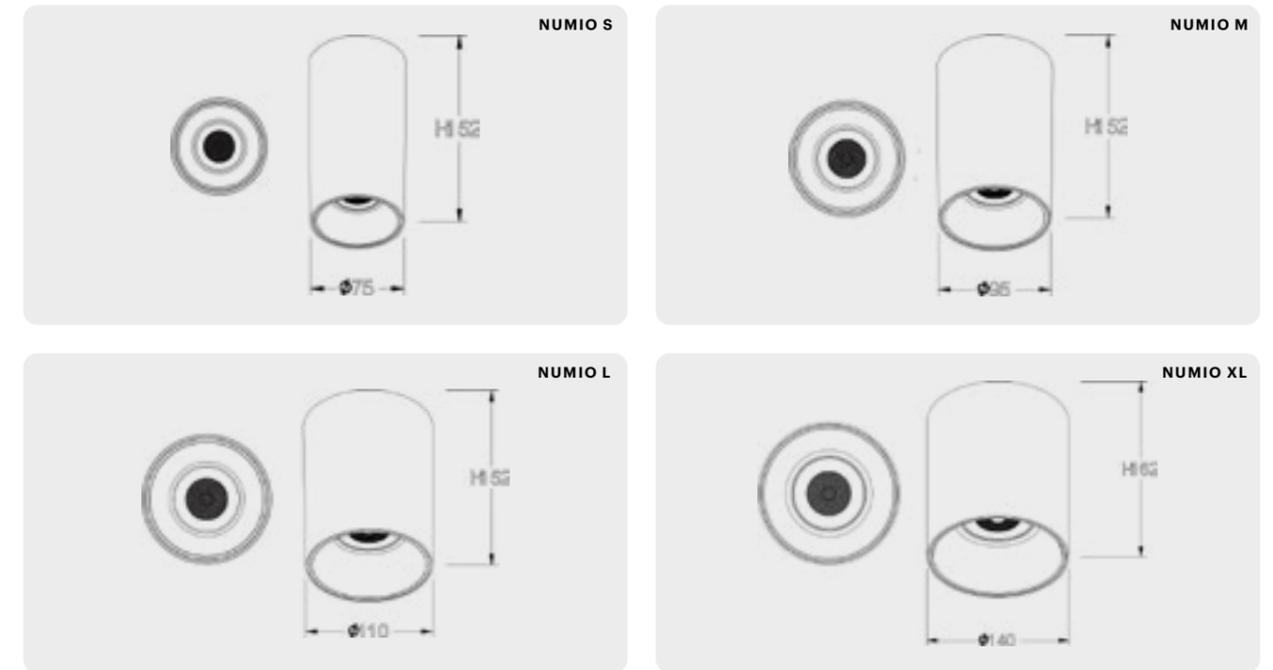

NUMIO	CCT	IP	CODE
S	2700K 3000K 3500K 4000K	20	S007
M	2700K 3000K 3500K 4000K	20	S008
L	2700K 3000K 3500K 4000K	20	S009
XL	2700K 3000K 3500K 4000K	20	S010

# Perla



Spotlight with magnetic base and adjustable body.



**DESCRIPTION**

Magnetic spotlight family available in three sizes.  
Tool-free mounting on magnetic or ferromagnetic surfaces enables fast positioning, aiming and refined adjustments.  
Multiple ring available.

**INTENDED USE**

Precise accent lighting for objects, textures and focal points, ensuring clean cut-off and high visual comfort.





**FINISHES**

Available in black finish.  
Available in white finish.  
Available in grey finish.  
Available on request finish.


# Perla

(mm)

ILLUMINANCE

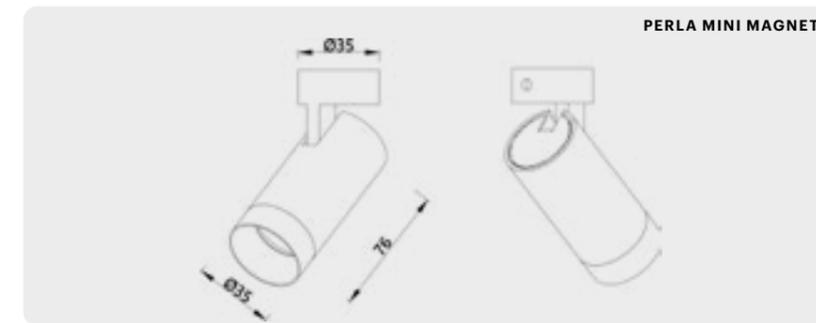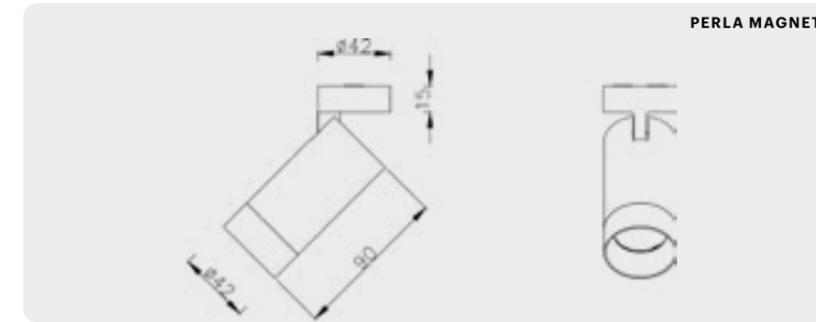

9W 3500k 20°:  
552lm 79lm/W

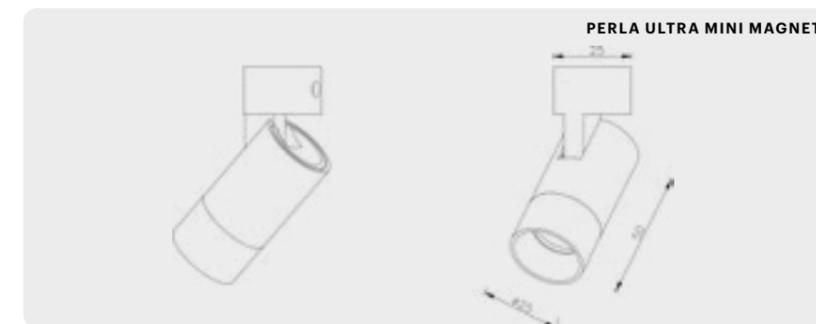

4W 3500k 20°:  
311lm 78lm/W

PERLA	CCT	IP	CODE
.....	2700K	20	<b>M024</b>
LED 12W	3000K		
.....	3500K		
CRI>90	4000K		
PERLA MINI	CCT	IP	CODE
.....	2700K	20	<b>M004</b>
LED 9W	3000K		
.....	3500K		
CRI>90	4000K		
..... double arm	2700K	20	<b>M031</b>
LED 9W	3000K		
.....	3500K		
CRI>90	4000K		
PERLA ULTRA MINI	CCT	IP	CODE
..... straight arm	2700K	20	<b>M043</b>
LED 4W	3000K		
.....	3500K		
CRI>90	4000K		

# Easy Neo



Magnet spotlight with double arms and adjustable light.



**DESCRIPTION**

Easy NEO magnetic base allows tool-free, drill-free mounting on magnetic tracks or steel plates. Optics can be changed in seconds without removing the luminaire, enabling fast transitions from tight spot to flood or elliptical beams.

**INTENDED USE**

Suitable for surface or recessed-style positioning in architectural and retail environments with evolving light layering

**DOUBLE ARM**




**FINISHES**

- Available in black finish.
- Available in white finish.
- Available in grey finish.
- Available on request finish.


# Easy Neo LENS

(mm)

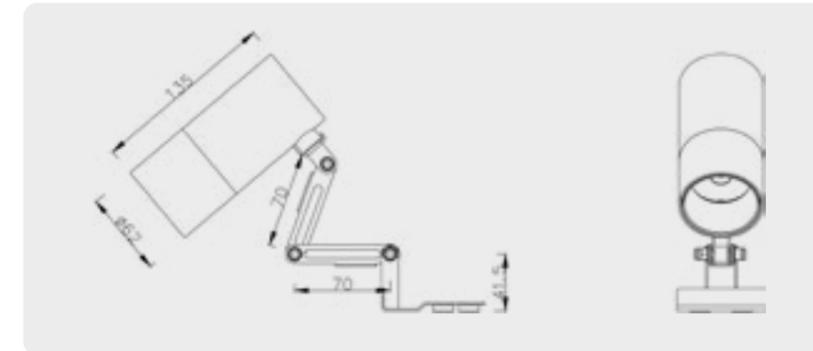

**ILLUMINANCE**

25W 4000k 18°:  
2136lm | 85lm/W

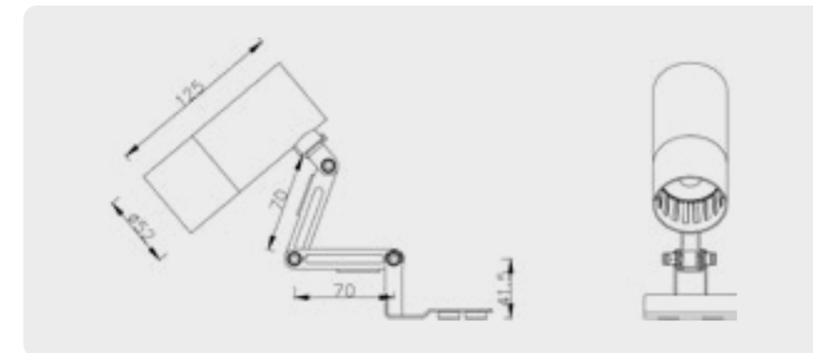



18W 4000k 18°:  
1585lm 88lm/W

EASY 62 NEO		CCT	IP	CODE
	double arm	2700K	20	<b>M029</b>
	LED 25W	3000K		
	CRI>90	4000K		
EASY 52 NEO		CCT	IP	CODE
	double arm	2700K	20	<b>M013</b>
	LED 18W	3000K		
	CRI>90	4000K		

# Easy Neo REFLECTOR

(mm)

ILLUMINANCE

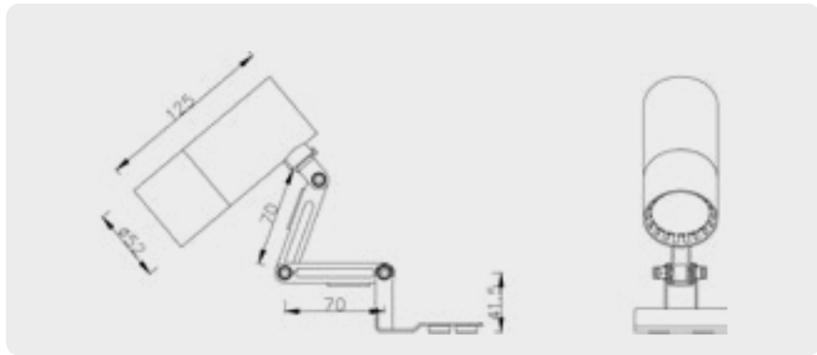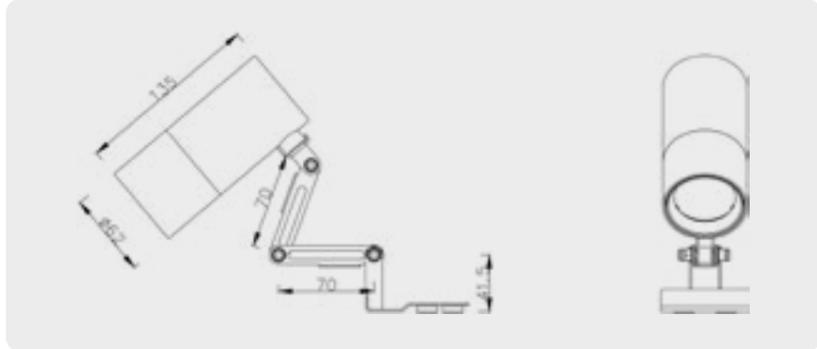

18W 4000K 18°:  
1724lm | 96lm/W

EASY 62 NEO		CCT	IP	CODE
	double arm	2700K	20	M030
		3000K		
	LED 25W	3500K		
		4000K		
	CRI>90			

EASY 52 NEO		CCT	IP	CODE
	double arm	2700K	20	M022
		3000K		
	LED 18W	3500K		
		4000K		
	CRI>90			



# Showcase lighting

## SPOTLIGHTS AND BRIDGES

### Spotlights

VC 70

Avior System

Deva

Bridge SCREEN

Bridge II

p. 96

p. 100

p. 102

p. 110

p. 112

p. 114

# Spotlights



Spotlight family designed for precise accent lighting, with compact size.



**DESCRIPTION**



Compact showcase lights collection designed to offer precise, glare-controlled beams to enhance products with clarity, depth and refined visual impact.

**INTENDED USE**

Compact spotlights for display cases and counters.





**FINISHES**

Available in black finish.  
Available in white finish.  
Available in grey finish.  
Available on request finish.

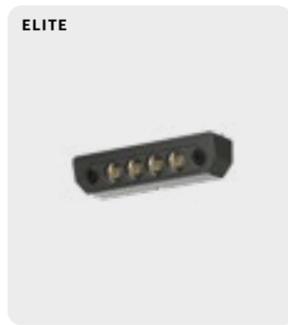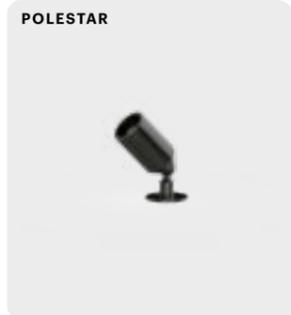



# Spotlights

(mm)

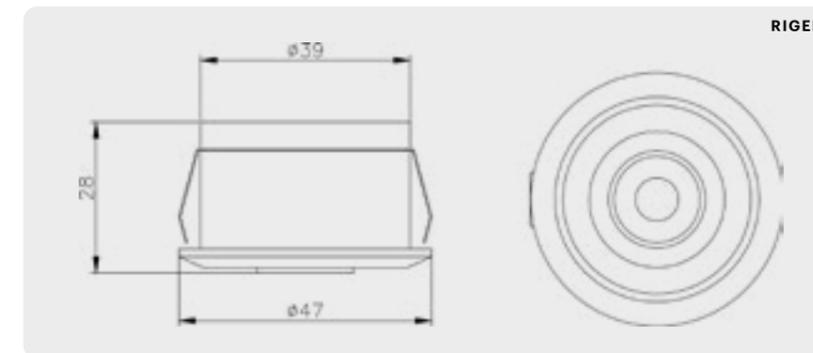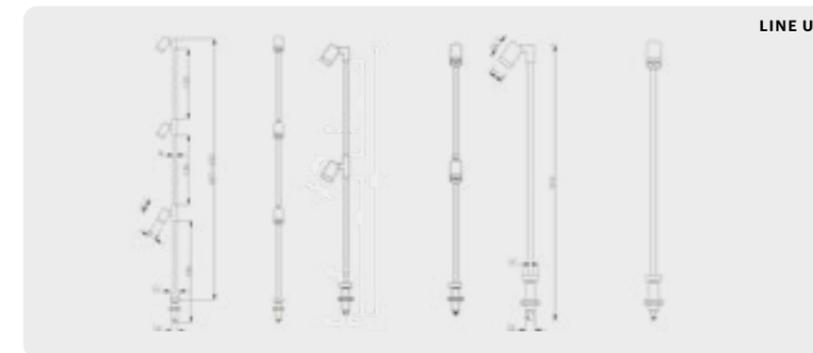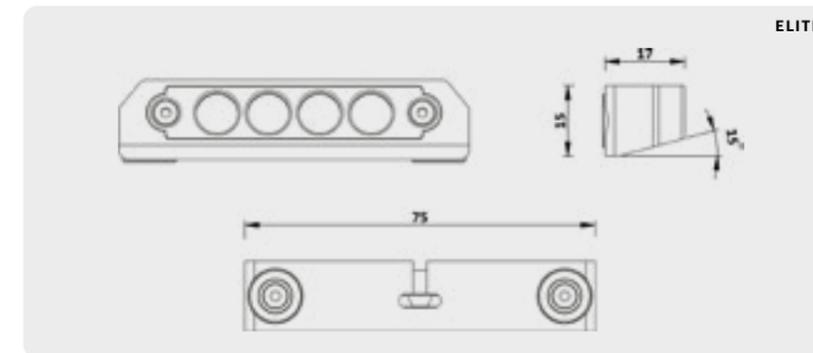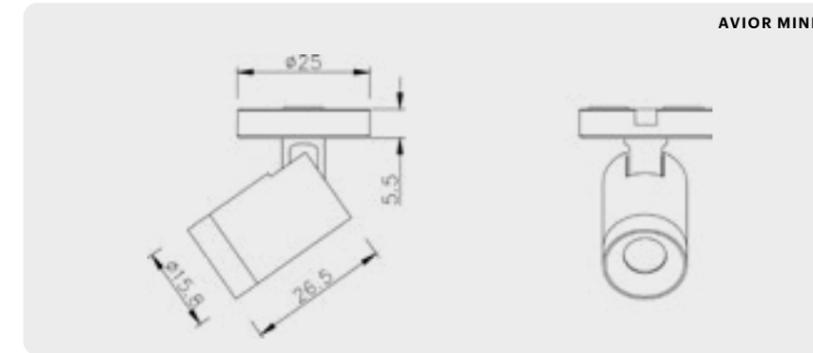

# Spotlights

(mm)

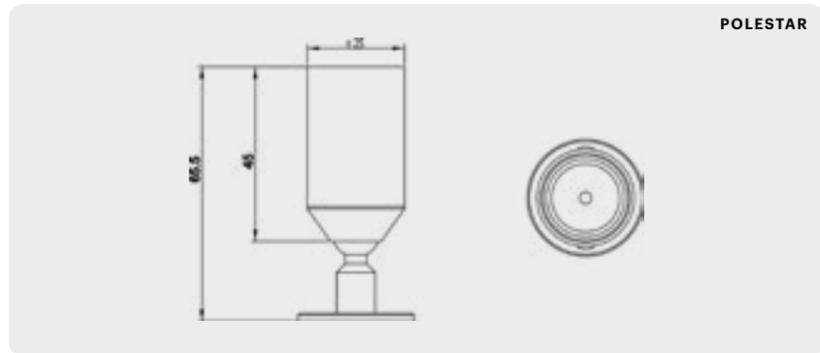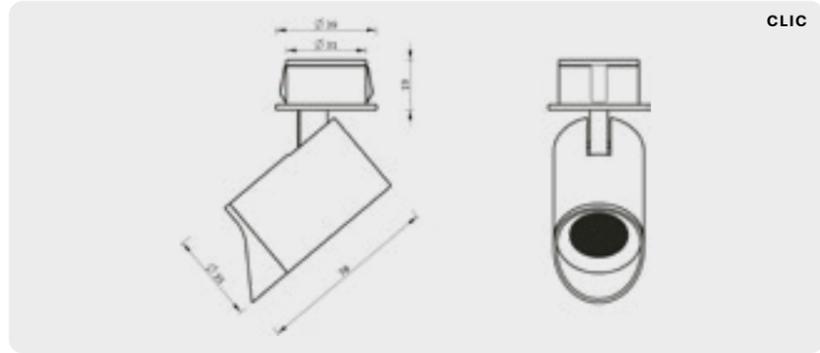

<b>AVIOR MINI</b>		<b>CCT</b>	<b>IP</b>	<b>CODE</b>
	magnet	2700K 3000K 3500K 4000K	20	<b>W003</b>
	screw	2700K 3000K 3500K 4000K	20	<b>W002</b>
option to add snooter	surface	2700K 3000K 3500K 4000K	20	<b>W004</b>
<b>ELITE</b>		<b>CCT</b>	<b>IP</b>	<b>CODE</b>
	magnet	2700K 3000K 3500K 4000K	20	<b>W012</b>
	pole	2700K 3000K 3500K 4000K	20	<b>W013</b>

# Spotlights

<b>LINE UP</b>		<b>CCT</b>	<b>IP</b>	<b>CODE</b>
	1 spotlight	2700K 3000K 3500K 4000K	20	<b>W014</b>
	2 spotlight	2700K 3000K 3500K 4000K	20	<b>W015</b>
	3 spotlight	2700K 3000K 3500K 4000K	20	<b>W016</b>
<b>RIGEL</b>		<b>CCT</b>	<b>IP</b>	<b>CODE</b>
	Ø30	2700K 3000K 3500K 4000K	20	<b>W018</b>
	Ø40	2700K 3000K 3500K 4000K	20	<b>W019</b>
<b>AVIOR</b>		<b>CCT</b>	<b>IP</b>	<b>CODE</b>
	magnet	2700K 3000K 3500K 4000K	20	<b>W006</b>
	screw	2700K 3000K 3500K 4000K	20	<b>W007</b>
option to add snooter	recessed	2700K 3000K 3500K 4000K	20	<b>W020</b>
<b>POLESTAR</b>		<b>CCT</b>	<b>IP</b>	<b>CODE</b>
	magnet	2700K 3000K 3500K 4000K	20	<b>W017</b>

SHOWCASE LIGHTING

# VC 70



Recessed mounted spotlight with oriented light beam.



### DESCRIPTION

VC 70 is a LED module luminaire, with a 72° inclined directional light beam.  
 Easy recessed mounting with built-in metal fixing clips.  
 Various selectable LED beam angles: 37°, 42°, or 84°.  
 Customizable input and extension cable lengths.  
 Dimmable drivers available upon request.

### INTENDED USE

Precise accent lighting, ideal to fit within niches, display cases or for lighting shelves and bookcases in any commercial setting.

### FINISHES

Available in black finish.

BLACK


03



# VC 70

24 V

(mm)

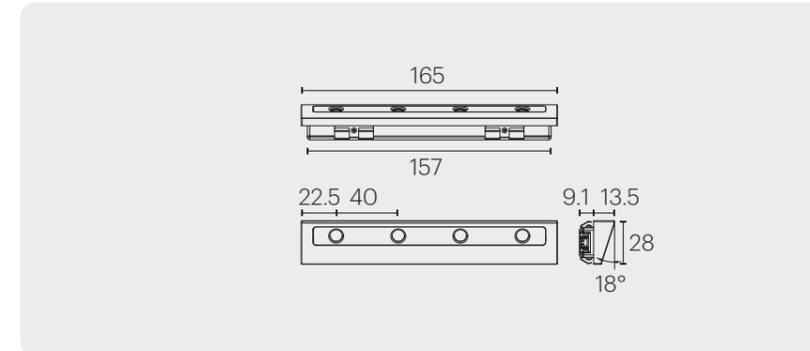

ILLUMINANCE

Model	H cm	Ø cm	LUX
4,5W	30	13	13483
4000K	50	22	4854
25°	60	27	3371
	100	45	1213
	300	135	134


### VC 70

	V IN (DC)	LED W	EFFICIENCY	CRI	SCDM	BEAM ANGLE	CCT	FINISH
Recessed installation	24 V	4,5W	84,8lm/W	Ra95	<3 Step	15°	4000K	03 black
Cutout (mm):						25°		
150 x 25 x 10 (min.)						36°		
4 LEDs						47°		
						90°		

SHOWCASE LIGHTING

# Avior System

Electrified track with spotlights and linear lamps.

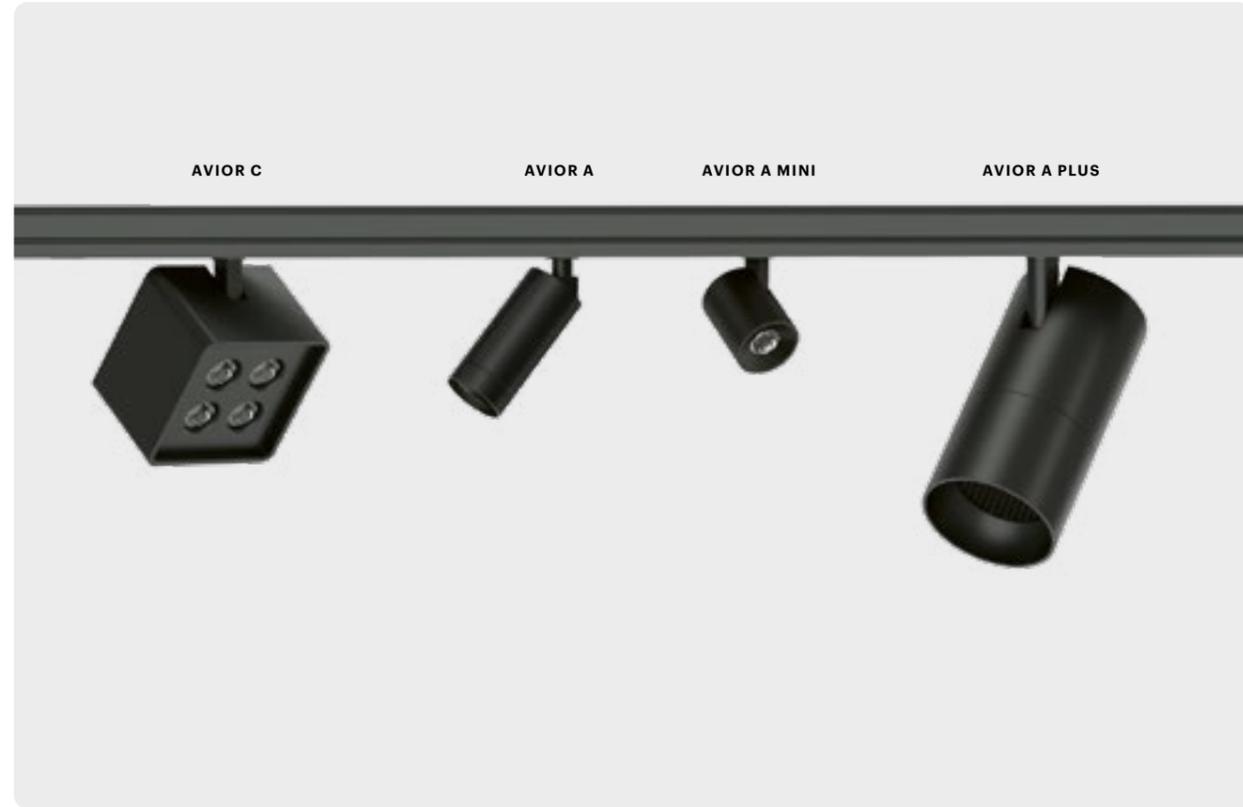

**DESCRIPTION**

Avior is a modular cuttable to size low voltage electrified mini track system, featuring a convenient plug & play power supply with a magnetically attached wired connector.


Can be integrated with miniature, yet efficient, adjustable spotlights or linear lamps, all with cable-less magnetic fixing / power supply system, allowing the shopfitters to freely add or remove the modules without polarity constrains.

**INTENDED USE**

With its slim minimalist and elegant design, Avior unleashes infinite possibilities, offering excellent concealment to seamlessly blend into any retail setting to create customized professional lighting effects.

**FINISHES**

Available in black or aluminium finish.

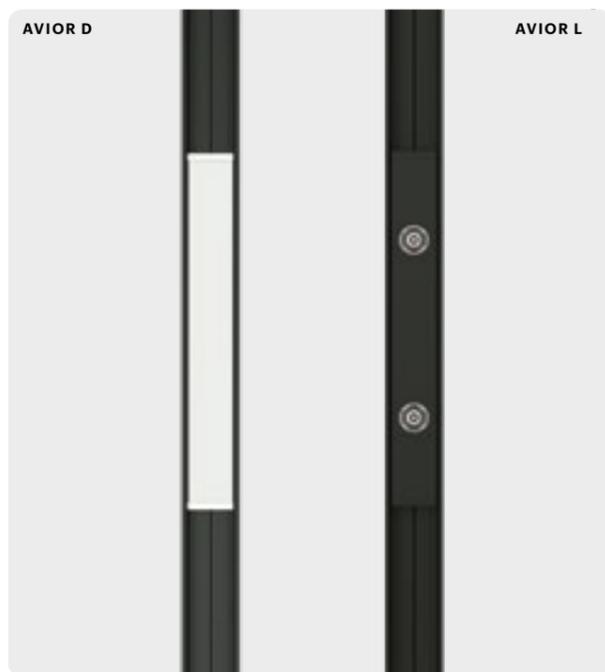



# Avior Track



**ELECTRIFIED TRACK**


Cutttable to size electrified track, compatible with Avior magnetic spotlights.

V IN (DC)	MAX LOAD	L (mm)
24 V	110W	3000mm

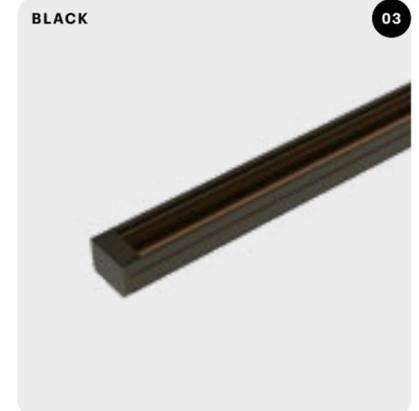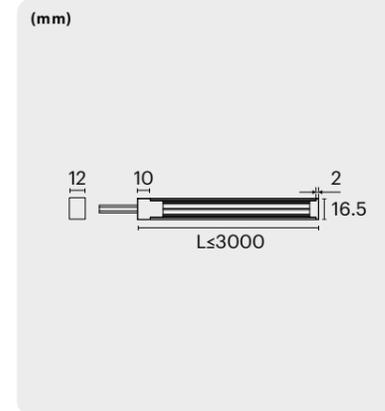


**LINEAR CONNECTOR**

To connect electrified track sections.

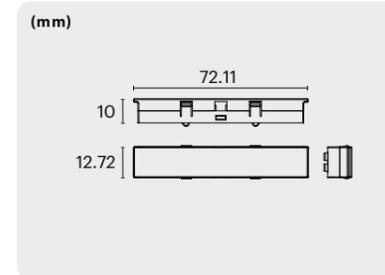


**CORNER CONNECTOR**

To connect electrified track sections.

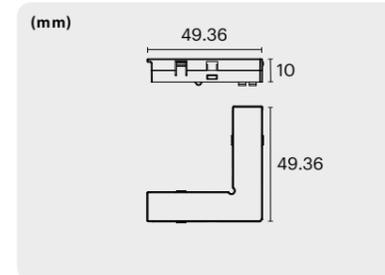


**ARTICULATED CONNECTOR**

To connect electrified track sections.

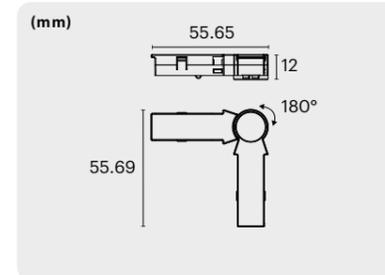

**FIXING ACCESSORIES**

A - Fixing bracket (ST2.9 Screws)	3000mm
B - Track cover	3000mm

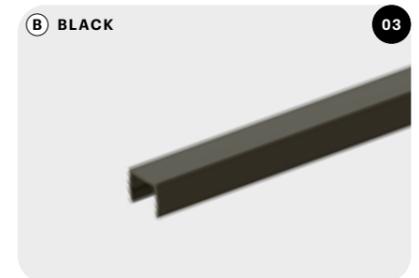




SHOWCASE  
LIGHTING

# Avior C



(mm)

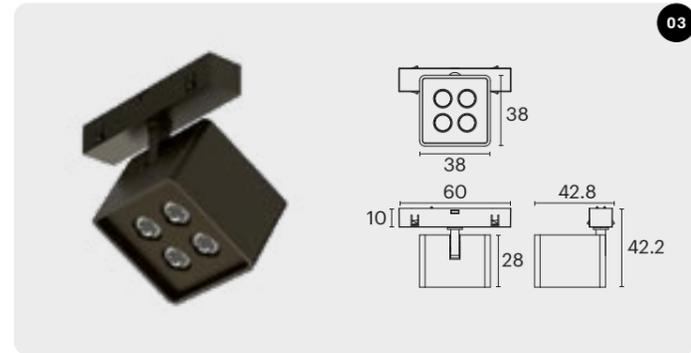

## ILLUMINANCE (4W - 3000K)

H cm	25°		36°		42°		84°	
	Ø cm	LUX	Ø cm	LUX	Ø cm	LUX	Ø cm	LUX
30	14	11727	16	13408	22	6485	47	2221
50	24	4222	27	4827	37	2335	79	799
60	29	2932	32	3352	44	1621	95	555
100	49	1055	54	1207	74	583	158	199
300	148	117	164	134	224	64	476	22

AVIOR C	V IN (DC)	LED W	EFFICIENCY	CRI	SCDM	BEAM ANGLE	CCT	FINISH
Magnetic Track installation	24V	4W	87,21lm/W (42°)	Ra95	<3 Step	15°	2700K	12 aluminium
Soft light		4 LEDs				25°	3000K	03 black
90° adjustable						36°	3500K	
						42°	4000K	
						84°		

### ACCESSORIES


- A - Honeycomb diffuser.
- B - Diffuser accessory I
- C - Diffuser accessory II  
Honeycomb mounted on each LED



# Avior A



(mm)

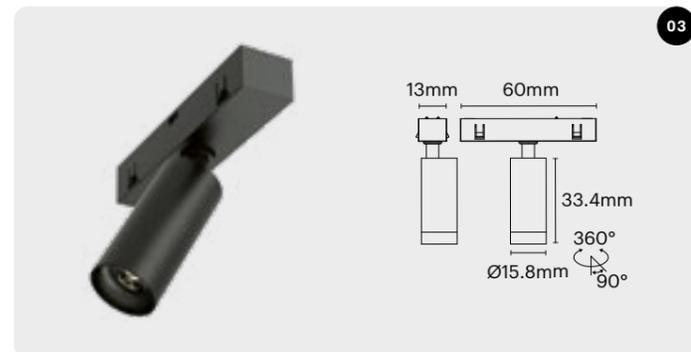

## ILLUMINANCE


Model	H cm	Ø cm	LUX
1,7W	30	9	4577
3000K	50	15	1648
25°	60	31	411
	100	63	103
	300	94	45

AVIOR C	V IN (DC)	LED W	EFFICIENCY	CRI	SCDM	BEAM ANGLE	CCT	FINISH
Magnetic Track installation	24V	1,7W	76,84lm/W	Ra95	<3 Step	15°	2700K	12 aluminium
Soft light		single LED	(4000K - 42°)			25°	3000K	03 black
90° adjustable						36°	3500K	
						42°	4000K	
						84°		

# Avior A PLUS



(mm)

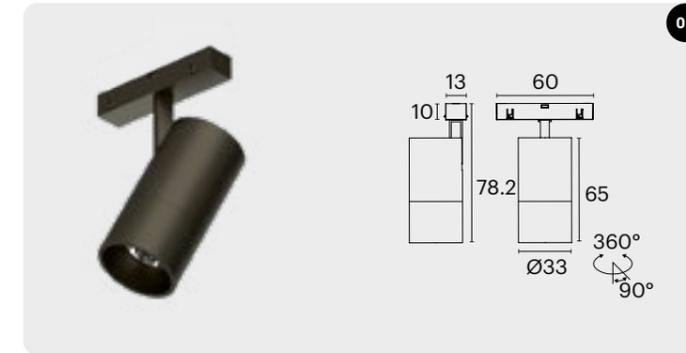

## ILLUMINANCE (5000K)

H cm	15°		24°		110°	
	Ø cm	LUX	Ø cm	LUX	Ø cm	LUX
30	7	15097	10	17198	90	2311
50	13	5435	18	6191	150	831
60	15	3775	21	4300	180	577
100	26	1359	36	1548	300	207
300	79	151	108	172	902	23

AVIOR C	V IN (DC)	LED W	EFFICIENCY	CRI	SCDM	BEAM ANGLE	CCT	FINISH
Magnetic Track installation	24V	4W	60,62lm/W	Ra95	<5 Step	15°	3000K	12 aluminium
Precision Lighting		single LED	(3000K - 36°)			24°	3500K	03 black
Crafted for jewelry and art						36°	4000K	
Compact light body						42°		
Vertical 90° adjustable								
Horizontal 355° adjustable								

### ACCESSORIES


- Honeycomb diffuser



# Avior A MINI



(mm)

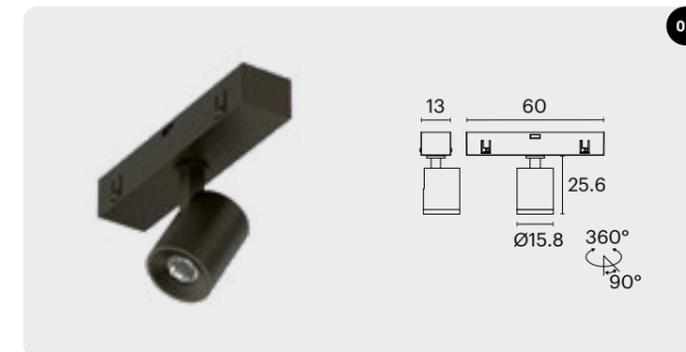

## ILLUMINANCE


H cm	15°		24°		36°		42°	
	Ø cm	LUX						
30	11	5761	14	3852	21	2450	23	1904
50	18	2074	24	1387	36	882	39	685
60	22	1440	29	962	43	612	47	476
100	36	518	48	346	73	220	79	171
300	110	57	146	38	219	24	237	19

AVIOR C	V IN (DC)	LED W	EFFICIENCY	CRI	SCDM	BEAM ANGLE	CCT	FINISH
Magnetic Track installation	24V	4W	76,84lm/W	Ra95	<3 Step	15°	2700K	12 aluminium
Precision Lighting		single LED	(4000K - 42°)			24°	3000K	03 black
Crafted for jewelry and art						36°	3500K	
Compact light body						42°	4000K	
Vertical 90° adjustable								
Horizontal 355° adjustable								

## Avior D

24 V CE cULus RoHS IP20

(mm)

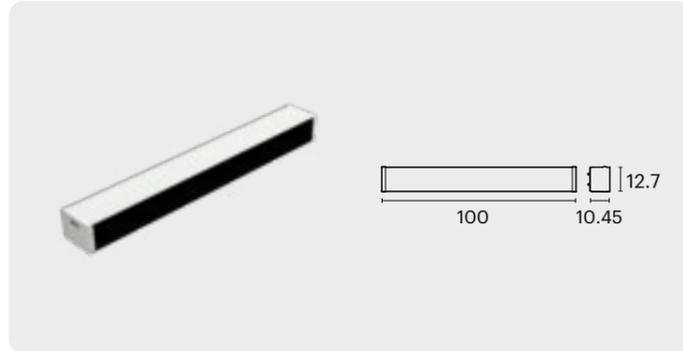

### ILLUMINANCE


Model	H cm	3000K		4000K	
		Ø cm	LUX	Ø cm	LUX
2,5W 120°	30	88	431	88	435
	50	147	155	148	156
	60	177	108	176	108
	100	295	38	294	39
	300	591	9	588	9

AVIOR C	V IN (DC)	LED W	EFFICIENCY	CRI	SCDM	BEAM ANGLE	CCT	FINISH
Magnetic Track installation Uniform Light Slim and versatile	24 V	2,5W 18 LEDs	44,77lm/W (4000K)	Ra95	<3 Step	120°	3000K 3500K 4000K	03 black

## Avior L

24 V CE cULus RoHS IP20


(mm)

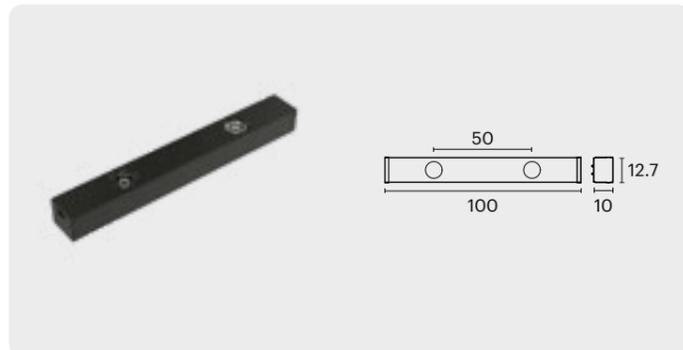

### ILLUMINANCE

Model	H cm	Ø cm	LUX
2,5W 3500K 36°	30	19	5310
	50	25	2987
	60	38	1327
	100	63	477
	300	191	53

AVIOR C	V IN (DC)	LED W	EFFICIENCY	CRI	SCDM	BEAM ANGLE	CCT	FINISH
Magnetic Track installation Uniform Light Slender body Angle selectable	24 V	2,5W 2 LEDs	86,43lm/W (3500K - 42°)	Ra95	<3 Step	15° 25° 36° 47° 84°	2700K 3000K 3500K 4000K	12 aluminium 03 black

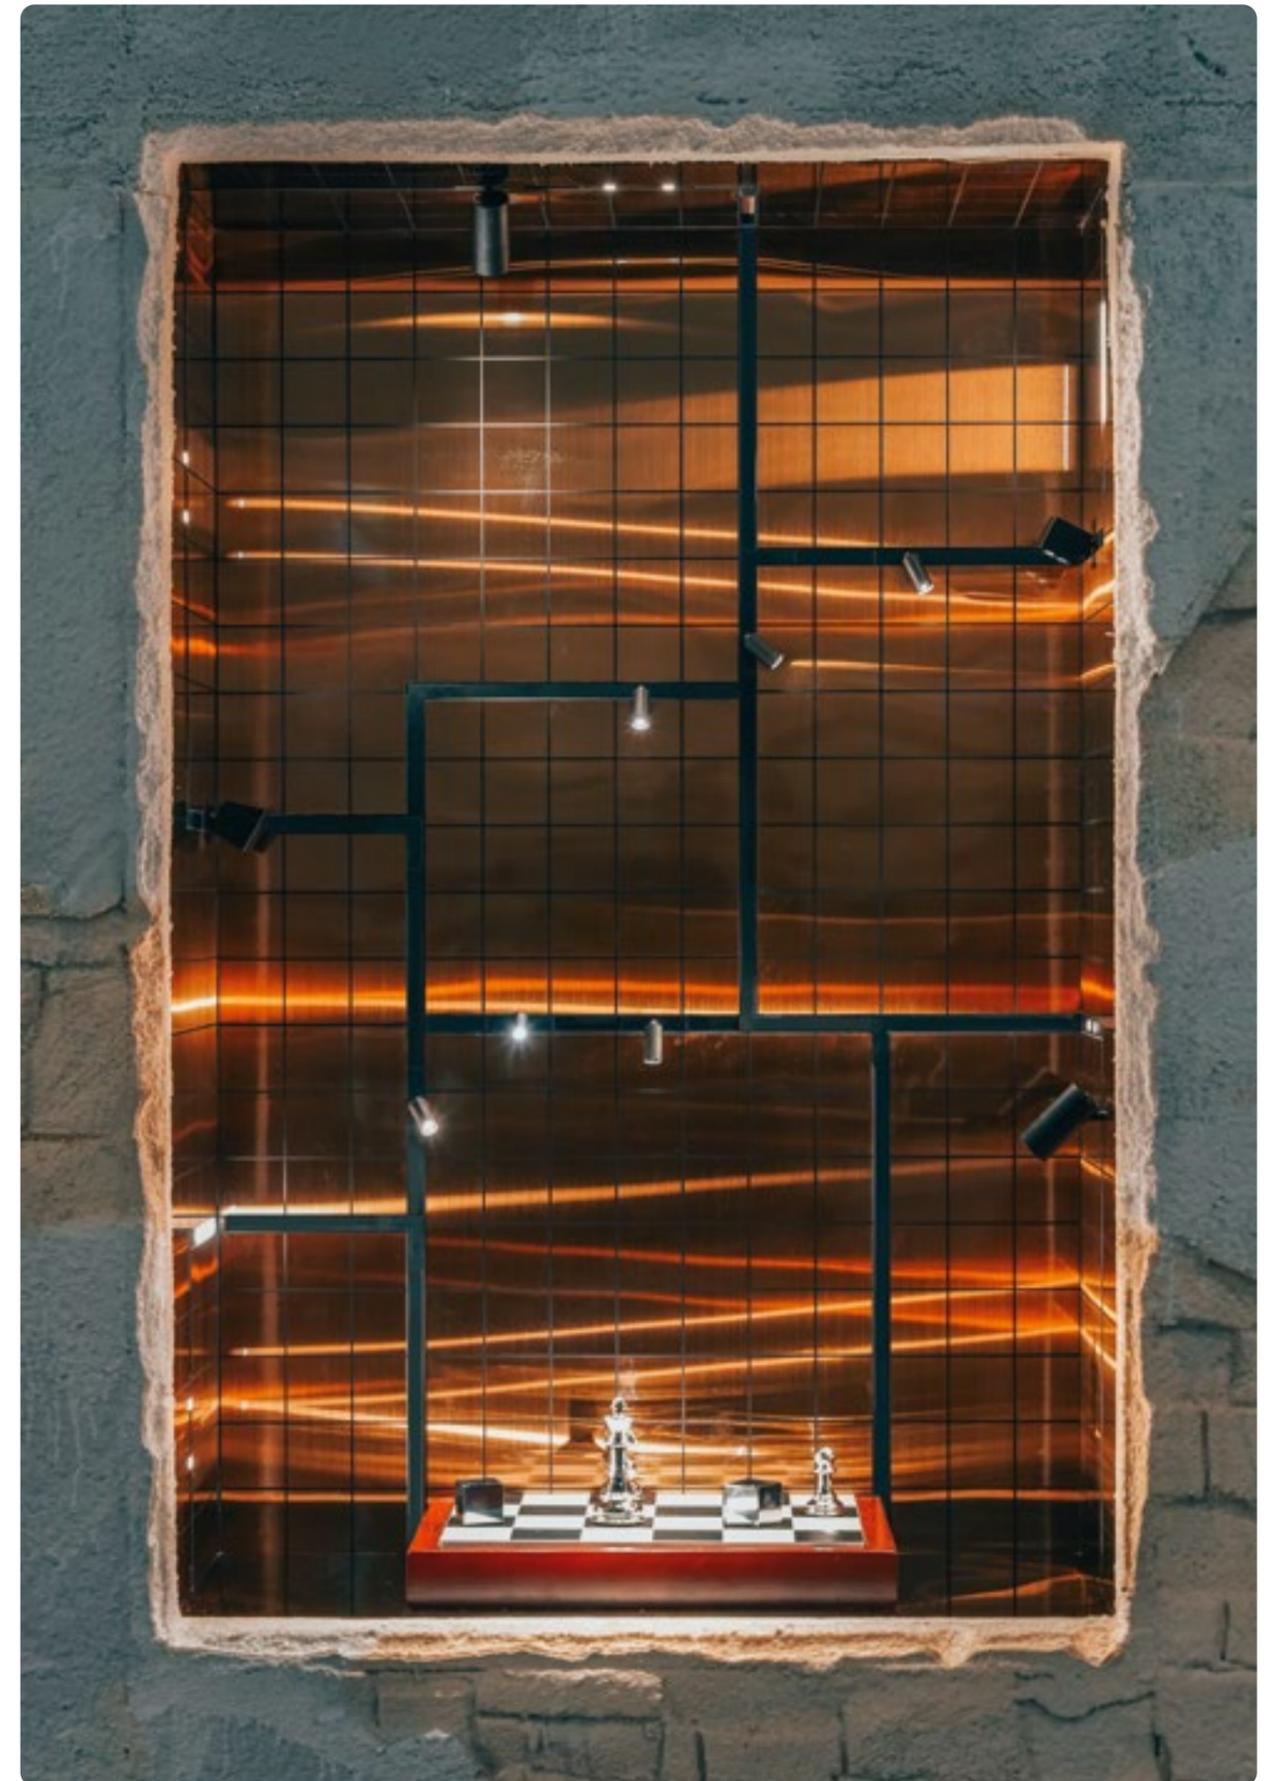

SHOWCASE LIGHTING

# Deva



Linear showcase light for precise product highlights.





**DESCRIPTION**

Maximum flexibility for this linear light with T-joint connectors, dot or diffuser options, square architectural body, 360° aiming, plug-and-play install and adjustable height.

**INTENDED USE**

For showcase and counters or flexible architectural lighting layouts.

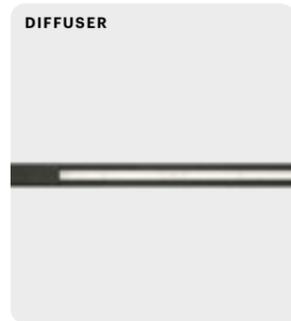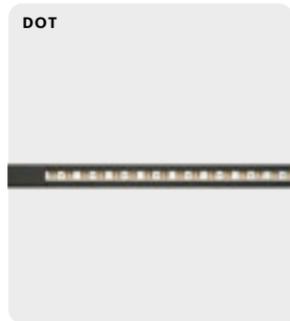


**FINISHES**

- Available in black finish.
- Available in white finish.
- Available in grey finish.
- Available on request finish.

# Deva

(mm)

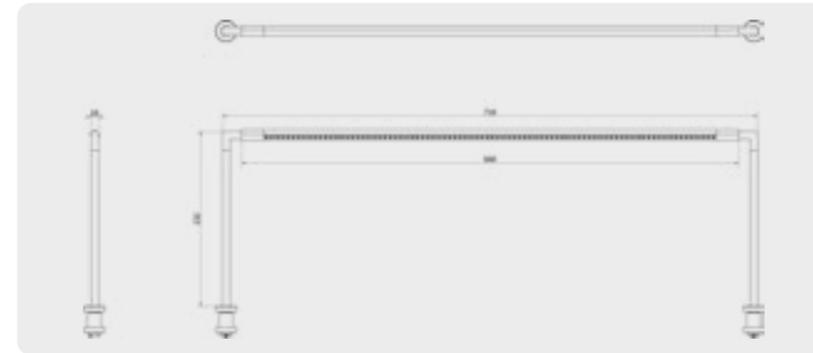

DEVA DOT		CCT	IP	CODE
length 660mm	.....	2700K	20	BD01
	LED 11W	3000K		
	.....	3500K		
	CRI>90	4000K		
length 960mm	.....	2700K	20	BD02
	LED 15W	3000K		
	.....	3500K		
	CRI>90	4000K		
DEVA DIFFUSER		CCT	IP	CODE
length 660mm	.....	2700K	20	BD03
	LED 11W	3000K		
	.....	3500K		
	CRI>90	4000K		
length 960mm	.....	2700K	20	BD04
	LED 15W	3000K		
	.....	3500K		
	CRI>90	4000K		

# Bridge SCREEN

CE cULus RoHS IP20

Surface mounted linear lamp with adjustable light beam.



**DESCRIPTION**

Classic design for display cases, combining modern aesthetics with practicality.

320° adjustable lamp body, in extra slim 10mm size and customizable length.


Linear light with opaline diffuser, providing even and soft light to the exhibits.

**INTENDED USE**

Designed to fit within display cases and counters in retail settings, where precise lighting must enhance products with comfort and no visual clutter.

**FINISHES**


Available in black, white or gold finish.

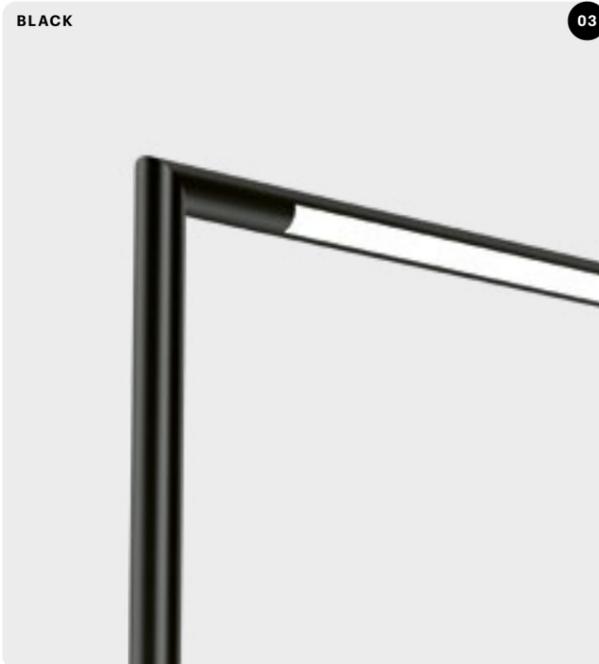

# Bridge SCREEN

24 V

(mm)

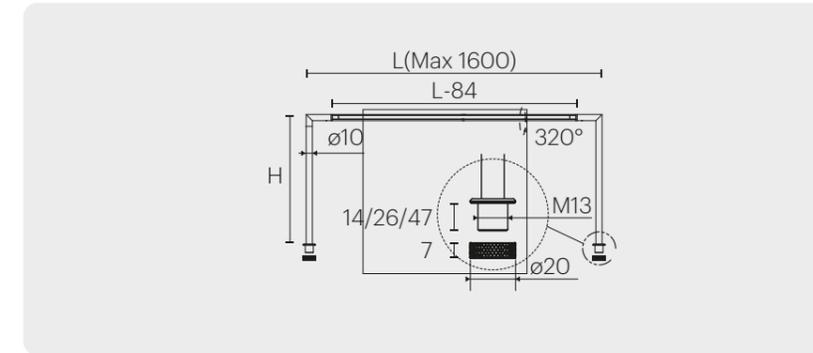

**ILLUMINANCE**

Model	H cm	Ø cm	LUX
835mm	30	79	3823
13W	50	132	1376
4000K	60	158	956
105°	100	263	344
	300	790	38

**BRIDGE SCREEN**

Screw installation

V IN (DC)

24 V

LED W

19W/m

EFFICIENCY

72lm/W

CRI

Ra90

SCDM

<3 Step

BEAM ANGLE

105°

CCT

2700K  
3000K  
3500K  
4000K

FINISH


01 white  
03 black  
18 gold

SHOWCASE LIGHTING

# Bridge II

CE cULus RoHS IP20

Surface mounted dotted lamp with adjustable light beam.

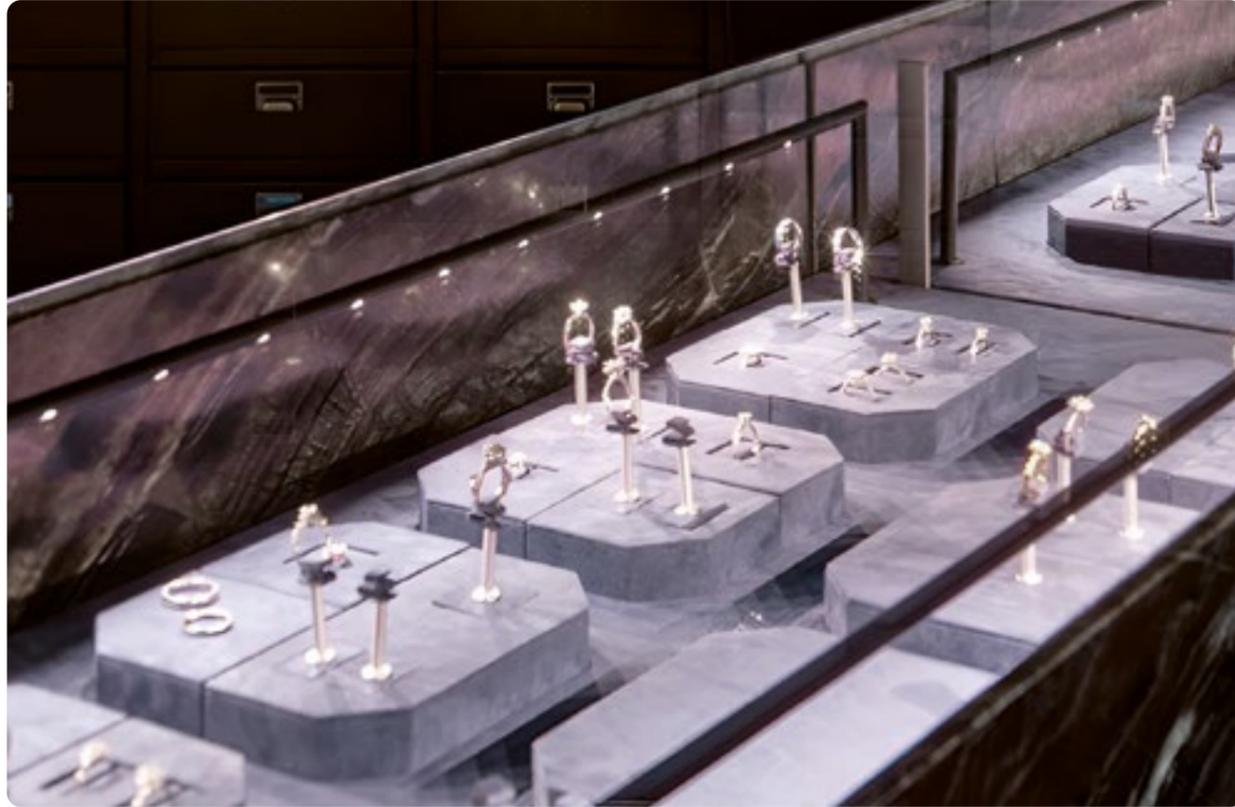

### DESCRIPTION

Elegant design for display cases, combining exquisite aesthetics and practicality for displaying precious exhibits.  
320° adjustable lamp body, in extra slim 10mm size and customizable length.  
Dotted LED design, providing elegant and precise light to the exhibits.

### INTENDED USE

Designed to fit within display cases in top luxury high-end retail settings, art galleries, museums and other venues, bringing out the unique charm of jewellery, watches, art or other valuable collectibles.

### FINISHES


Available in black, white or gold finish.



# Bridge II

350mA

(mm)

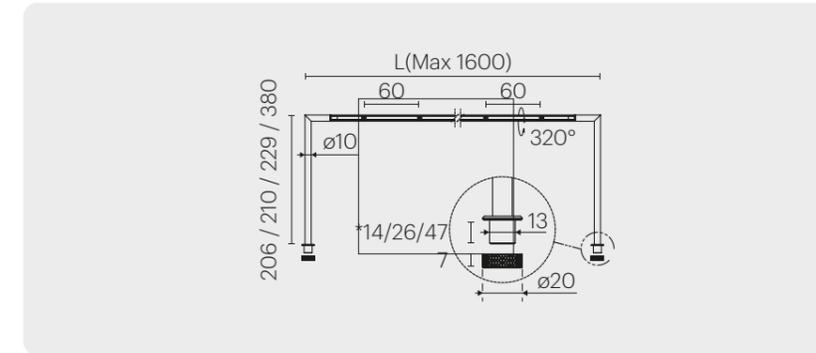

### ILLUMINANCE

Model	H cm	Ø cm	LUX
820mm	30	52	6138
13W	50	87	2210
3500K	60	105	1535
85°	100	175	552
	300	525	61

### BRIDGE II

CC IN	LED W	EFFICIENCY	CRI	SCDM	BEAM ANGLE	CCT	FINISH
Screw installation	350mA	1W / LED	77lm/W	Ra90	<3 Step	85°	01 white 03 black 18 gold
						2700K	
						3000K	
						3500K	
						4000K	

SHOWCASE LIGHTING

# Linear lights and LED strips

LINEAR	LED Strips	p. 118
	Flexneon	p. 122
	Linear Light	p. 124
	MB60 II	p. 132
	Nano tubular II	p. 134
	Norma	p. 136
	Norma PRO	p. 138
	Norma PRO 45	p. 140
	Nano NORMA 45	p. 142
	Mini	p. 144
	Mininoor	p. 146
Cali	p. 148	
Malindi2	p. 150	
LED REELS	LED REEL	p. 152
ACCESSORIES	Cables and connectors	p. 154

# LED Strips



Strips Reel for profiles, coves, and custom details.



## DESCRIPTION

Linear Light is a collection of aluminum profiles in multiple sections, housing LED strips to deliver clean, continuous lines of light with flexible integration across architectural surfaces.

## INTENDED USE

Designed for architectural applications where continuous illumination defines surfaces, edges and volumes.

## FINISHES

- Available in black finish.
- Available in silver finish.
- Available on request finish.



# LED Reel TUNABLE WHITE



DUALGLOW (24V)	LUMEN/m	LUMEN/W	CRI	W	CCT
200 LEDs/m	990/1110 lm/m	103/115 lm/W	≥ 80	9,6	2700K-6500K
5000 mm	1490/1670 lm/m	103/115 lm/W		14,4	
UNIT CUT 20mm	1990/2200 lm/m	103/115 lm/W		19,2	
WIDTH 10/7mm	2960/3300 lm/m	103/115 lm/W		28,8	



FUSION (24V)	LUMEN/m	LUMEN/W	CRI	W	CCT
168 LEDs/m	2815/3045 lm/m	90/98 lm/W	≥ 90	28,8	2700K-6500K
5000 mm					
UNIT CUT 36mm					
WIDTH 10mm					

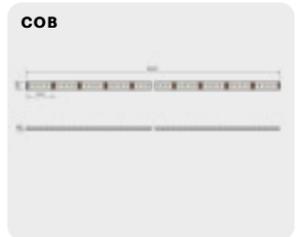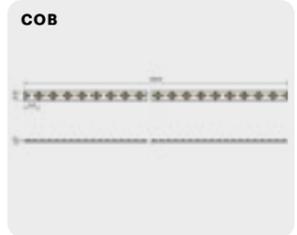


LINEAR LIGHTS AND LED STRIPS


## LED Reel SINGLE COLOUR




POLAR (24V)	LUMEN/m	LUMEN/W	CRI	W	CCT
240 LEDs/m	1030 lm/m	95 lm/W	≥ 80	9,6	4000K
5000 mm	1570 lm/m	101 lm/W		14,4	(also available in: 2700K / 3000K / 3500K)
UNIT CUT 25mm	2093 lm/m	101 lm/W		19,2	
WIDTH 10/8/5mm	3096 lm/m	100 lm/W		28,8	

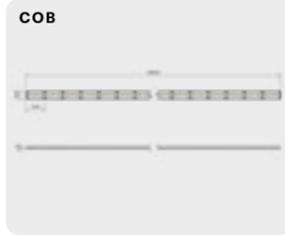


ARCTIC (24V)	LUMEN/m	LUMEN/W	CRI	W	CCT
200 LEDs/m	1000 lm/m	96 lm/W	≥ 90	9,6	4000K
5000 mm	1600 lm/m	103 lm/W		14,4	(also available in: 2700K / 3000K / 3500K / 6500K)
UNIT CUT 10mm	2200 lm/m	106 lm/W		19,2	
WIDTH 10/8mm	3400 lm/m	109 lm/W		28,8	

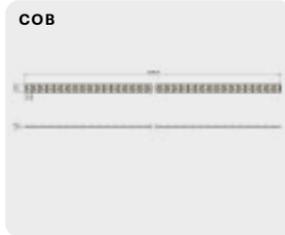

ARCTIC RIGID (24V)	LUMEN/m	LUMEN/W	CRI	W	CCT
152 LEDs/m	562 lm/m	94 lm/W	≥ 90	6	4000K
5000 mm	972 lm/m	101 lm/W		9,6	(also available in: 2700K / 3000K / 3500K / 6500K)
UNIT CUT 13mm	1580 lm/m	111 lm/W		14,4	
WIDTH 4mm					

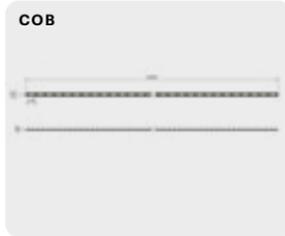


FROST (48V)	LUMEN/m	LUMEN/W	CRI	W	CCT
250 LEDs/m	3300 lm/m	114 lm/W	≥ 90	28,8	4000K
5000 mm					(also available in: 3500K)
UNIT CUT 20mm					
WIDTH 10mm					

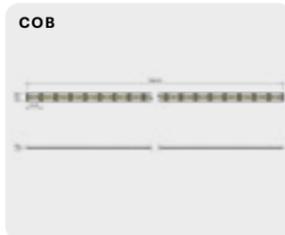

## LED Reel RGB



EOS (24V)	LUMEN/m	LUMEN/W	CRI	W	CCT	WIDTH
144 LEDs/m	100 lm/m	8 lm/W	≥ 80	12	RGB	6mm
5000 mm	1040 lm/m	69 lm/W		14		8mm
UNIT CUT 42mm	1200 lm/m	37 lm/W		30		10mm

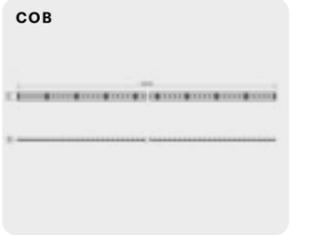

IRIS (24V)	LUMEN/m	LUMEN/W	CRI	W	CCT
180 LEDs/m	1500/3300 lm/m	51/115 lm/W	≥ 80	28,8	RGB + WH
5000 mm					
UNIT CUT 100 mm					
WIDTH 12 mm					



LINEAR LIGHTS AND LED STRIPS

# Flex Neon



Flexible body for smooth, continuous light.




**DESCRIPTION**

Flexible LED tubes available in different sizes that create continuous, uniform lines of light. They bend around curves and corners for lettering, profiles, and architectural details.

**INTENDED USE**

Ideal for signage, architectural outlines and decorative accents, indoors and outdoors, with seamless light lines.

# Flex Neon

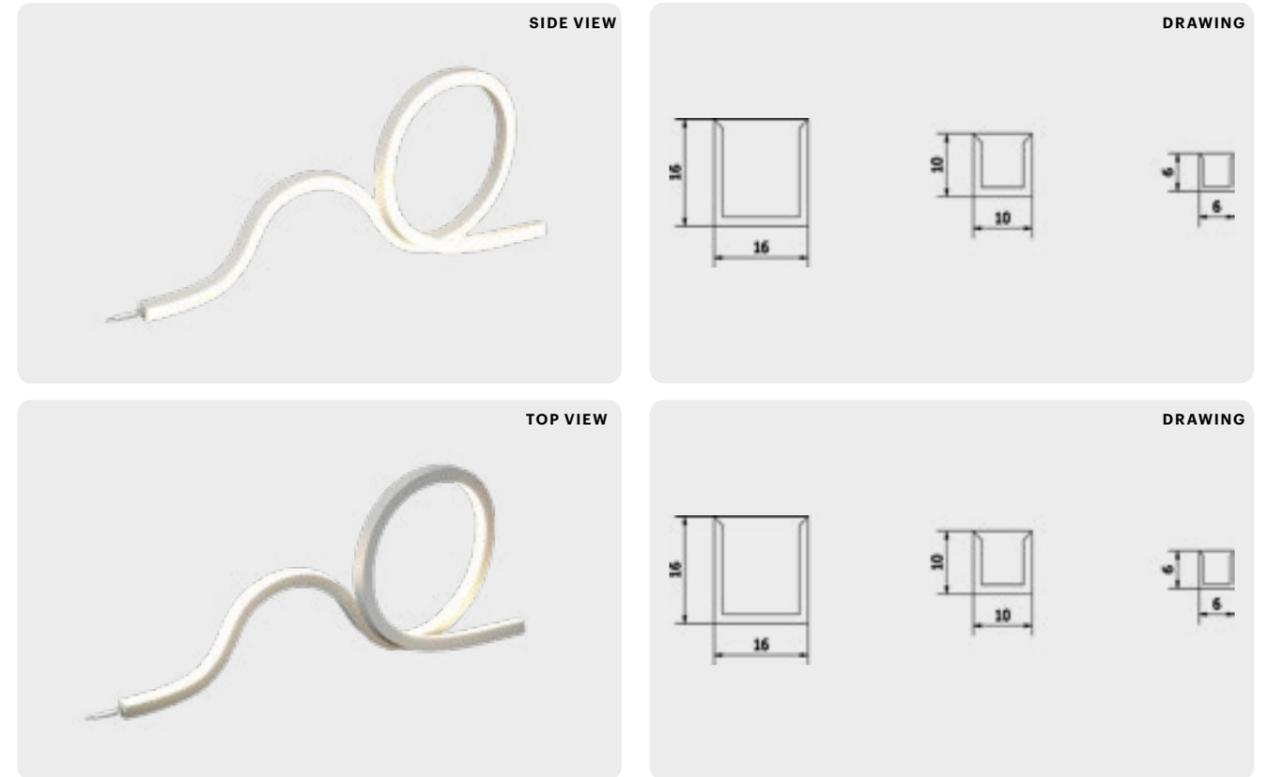

LINEAR LIGHTS AND LED STRIPS

LEDLINE	WIDTH	CCT	POWER (W)	CODE
24V	16x17	2700K	4,8	FX01
IP 67		3000K	9,6	
		3500K	14,4	
CRI>90		4000K		
		RGB		
24V	10x10	2700K	4,8	FX02
IP 67		3000K	9,6	
		3500K	14,4	
CRI>90		4000K		
		RGB		
24V	06x06	2700K	4,8	FX03
IP 67		3000K	9,6	
		3500K	14,4	
CRI>90		4000K		
		RGB		

# Linear Light



Aluminum bars with integrated LED strip for clean, linear illumination.



## DESCRIPTION

Linear Light is a collection of aluminum profiles in multiple sections, housing LED strips to deliver clean, continuous lines of light with flexible integration across architectural surfaces.


## INTENDED USE

Designed for architectural applications where continuous illumination defines surfaces, edges and volumes.

## FINISHES

- Available in black finish.
- Available in silver finish.
- Available on request finish.

# Linear Light FIRST


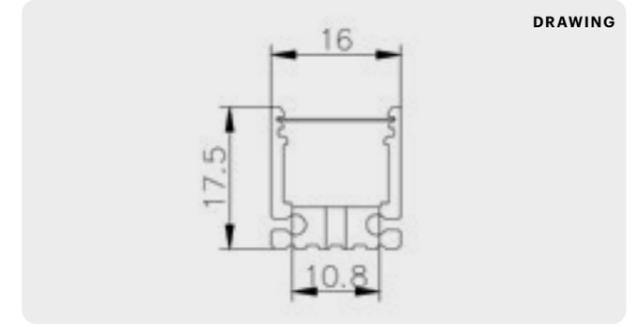


DRAWING

## COMPATIBLE STRIP

POLAR		WIDTH	CCT	POWER (W)	CODE
UNIT CUT 25MM	24V	10	2700K	9,6	SL110
	240 LED/M	8	3000K	14,4	
		5	3500K	19,2	
	CRI>80		4000K	28,8	
ARCTIC		WIDTH	CCT	POWER (W)	CODE
UNIT CUT 10MM	24V	10	2700K	9,6	SL210
	200 LED/M	8	3000K	14,4	
		4 (RIGID)	3500K	19,2	
	CRI>90		4000K	28,8	
DUALGLOW		WIDTH	CCT	POWER (W)	CODE
UNIT CUT 20MM	24V	10	TUN WH	9,6	SL410
	200 LED/M	7		14,4	
				19,2	
	CRI>80			28,8	
FROST		WIDTH	CCT	POWER (W)	CODE
UNIT CUT 20MM	24V	10	3500K	28,8	SL510
	250 LED/M		4000K		
	CRI>90				
EOS		WIDTH	CCT	POWER (W)	CODE
UNIT CUT 42MM	24V	10	RGB	30	SL308
	144 LED/M				
	CRI>80				
IRIS		WIDTH	CCT	POWER (W)	CODE
UNIT CUT 100MM	24V	12	RGB+ WH	28,8	SL312
	180 LED/M				
	CRI>80				
FUSION		WIDTH	CCT	POWER (W)	CODE
UNIT CUT 36MM	24V	10	TUN WH	28,8	SL610
	168 LED/M				
	CRI>90				



## Linear Light 2211

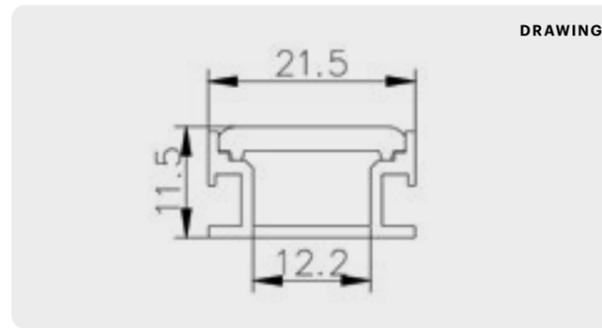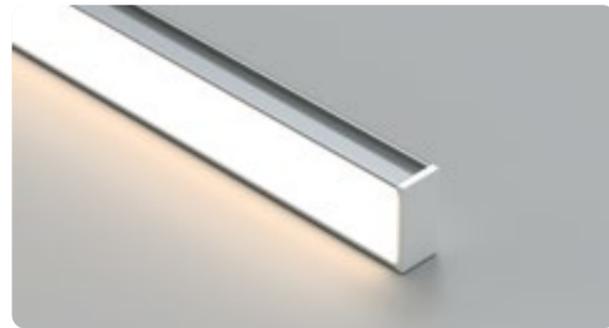

### COMPATIBLE STRIP

POLAR		WIDTH	CCT	POWER (W)	CODE
UNIT CUT 25MM	24V	10	2700K	9,6	SL110
	240 LED/M	8	3000K	14,4	
		5	3500K	19,2	
	CRI>80		4000K	28,8	
ARCTIC		WIDTH	CCT	POWER (W)	CODE
UNIT CUT 10MM	24V	10	2700K	9,6	SL210
	200 LED/M	8	3000K	14,4	
		4 (RIGID)	3500K	19,2	
	CRI>90		4000K	28,8	
DUALGLOW		WIDTH	CCT	POWER (W)	CODE
UNIT CUT 20MM	24V	10	TUN WH	9,6	SL410
	200 LED/M	7		14,4	
				19,2	
	CRI>80			28,8	
FROST		WIDTH	CCT	POWER (W)	CODE
UNIT CUT 20MM	24V	10	3500K	28,8	SL510
	250 LED/M		4000K		
	CRI>90				
EOS		WIDTH	CCT	POWER (W)	CODE
UNIT CUT 42MM	24V	10	RGB	30	SL308
	144 LED/M				
	CRI>80				
IRIS		WIDTH	CCT	POWER (W)	CODE
UNIT CUT 100MM	24V	12	RGB+ WH	28,8	SL312
	180 LED/M				
	CRI>80				
FUSION		WIDTH	CCT	POWER (W)	CODE
UNIT CUT 36MM	24V	10	TUN WH	28,8	SL610
	168 LED/M				
	CRI>90				


## Linear Light 1716 30°

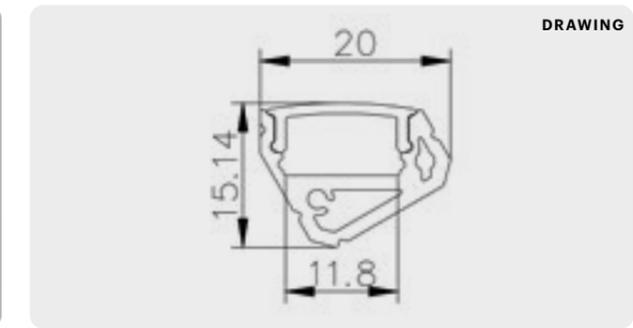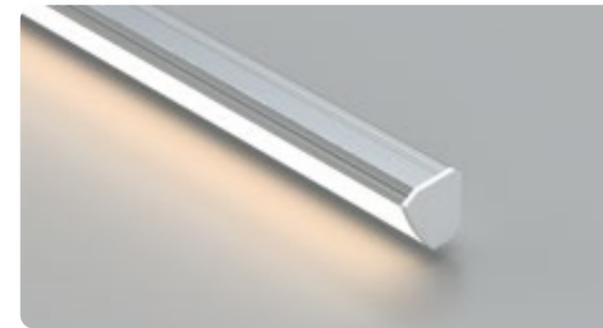

### COMPATIBLE STRIP

POLAR		WIDTH	CCT	POWER (W)	CODE
UNIT CUT 25MM	24V	10	2700K	9,6	SL110
	240 LED/M	8	3000K	14,4	
		5	3500K	19,2	
	CRI>80		4000K	28,8	
ARCTIC		WIDTH	CCT	POWER (W)	CODE
UNIT CUT 10MM	24V	10	2700K	9,6	SL210
	200 LED/M	8	3000K	14,4	
		4 (RIGID)	3500K	19,2	
	CRI>90		4000K	28,8	
DUALGLOW		WIDTH	CCT	POWER (W)	CODE
UNIT CUT 20MM	24V	10	TUN WH	9,6	SL410
	200 LED/M	7		14,4	
				19,2	
	CRI>80			28,8	
FROST		WIDTH	CCT	POWER (W)	CODE
UNIT CUT 20MM	24V	10	3500K	28,8	SL510
	250 LED/M		4000K		
	CRI>90				
EOS		WIDTH	CCT	POWER (W)	CODE
UNIT CUT 42MM	24V	10	RGB	30	SL308
	144 LED/M				
	CRI>80				
FUSION		WIDTH	CCT	POWER (W)	CODE
UNIT CUT 36MM	24V	10	TUN WH	28,8	SL610
	168 LED/M				
	CRI>90				


## Linear Light 1707

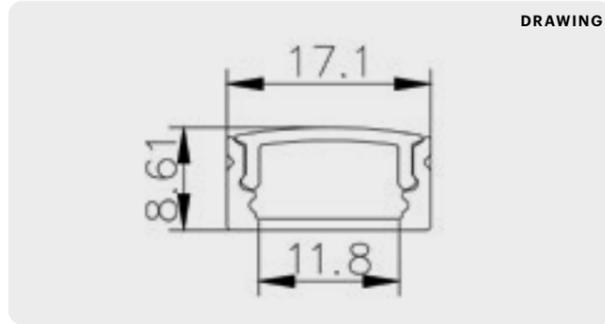

### COMPATIBLE STRIP

POLAR		WIDTH	CCT	POWER (W)	CODE	
UNIT CUT 25MM	24V	10	2700K	9,6	SL110	
	240 LED/M	8	3000K	14,4		
		5	3500K	19,2		
	CRI>80		4000K	28,8		
ARCTIC						
	UNIT CUT 10MM	24V	10	2700K	9,6	SL210
			8	3000K	14,4	
		200 LED/M	4 (RIGID)	3500K	19,2	
	CRI>90		4000K	28,8		
DUALGLOW						
	UNIT CUT 20MM	24V	10	TUN WH	9,6	SL410
			7		14,4	
		200 LED/M			19,2	
	CRI>80			28,8		
FROST						
	UNIT CUT 20MM	24V	10	3500K	28,8	SL510
				4000K		
		250 LED/M				
	CRI>90					
EOS						
	UNIT CUT 42MM	24V	10	RGB	30	SL308
		144 LED/M				
	CRI>80					
FUSION						
	UNIT CUT 36MM	24V	10	TUN WH	28,8	SL610
		168 LED/M				
	CRI>90					


## Linear Light 1616 45°

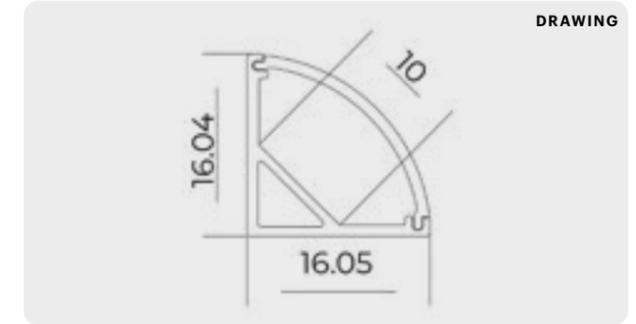

### COMPATIBLE STRIP

POLAR		WIDTH	CCT	POWER (W)	CODE	
UNIT CUT 25MM	24V	10	2700K	9,6	SL110	
	240 LED/M	8	3000K	14,4		
		5	3500K	19,2		
	CRI>80		4000K	28,8		
ARCTIC						
	UNIT CUT 10MM	24V	10	2700K	9,6	SL210
			8	3000K	14,4	
		200 LED/M	4 (RIGID)	3500K	19,2	
	CRI>90		4000K	28,8		
DUALGLOW						
	UNIT CUT 20MM	24V	10	TUN WH	9,6	SL410
			7		14,4	
		200 LED/M			19,2	
	CRI>80			28,8		
FROST						
	UNIT CUT 20MM	24V	10	3500K	28,8	SL510
				4000K		
		250 LED/M				
	CRI>90					
EOS						
	UNIT CUT 42MM	24V	10	RGB	30	SL308
		144 LED/M				
	CRI>80					
FUSION						
	UNIT CUT 36MM	24V	10	TUN WH	28,8	SL610
		168 LED/M				
	CRI>90					


## Linear Light 1408

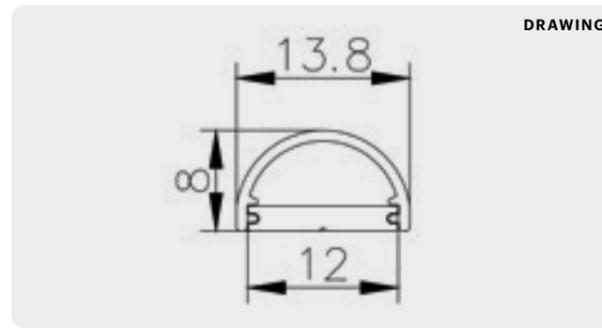

### COMPATIBLE STRIP

POLAR		WIDTH	CCT	POWER (W)	CODE
UNIT CUT 25MM	24V	10	2700K	9,6	SL110
	240 LED/M	8	3000K	14,4	
		5	3500K	19,2	
	CRI>80		4000K	28,8	
ARCTIC		WIDTH	CCT	POWER (W)	CODE
	UNIT CUT 10MM	10	2700K	9,6	SL210
		8	3000K	14,4	
	200 LED/M	4 (RIGID)	3500K	19,2	
CRI>90		4000K	28,8		
DUALGLOW TW		WIDTH	CCT	POWER (W)	CODE
	UNIT CUT 20MM	10	WW 2700K	9,6	SL410
		7	CW 6500K	14,4	
	200 LED/M			19,2	
CRI>80			28,8		
FROST		WIDTH	CCT	POWER (W)	CODE
	UNIT CUT 20MM	10	3500K	28,8	SL510
			4000K		
	250 LED/M				
CRI>90					
EOS		WIDTH	CCT	POWER (W)	CODE
	UNIT CUT 42MM	10	RGB	30	SL308
	144 LED/M				
CRI>80					
FUSION TW		WIDTH	CCT	POWER (W)	CODE
	UNIT CUT 36MM	10	WW 2700K	28,8	SL610
			CW 6500K		
	168 LED/M				
CRI>90					


## Linear Light 1010 45°

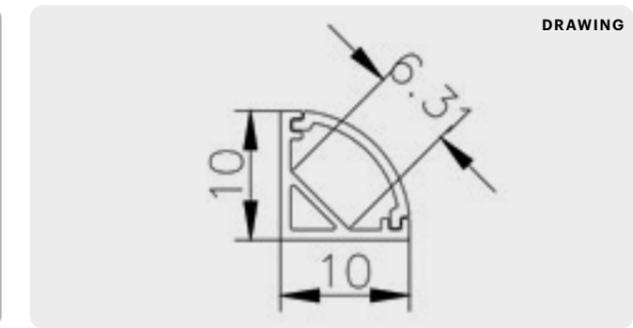

### COMPATIBLE STRIP

POLAR		WIDTH	CCT	POWER (W)	CODE
UNIT CUT 25MM	24V	5	2700K	9,6	SL110
	240 LED/M		3000K	14,4	
			3500K		
	CRI>80		4000K		
ARCTIC		WIDTH	CCT	POWER (W)	CODE
	UNIT CUT 10MM	4 (RIGID)	2700K	9,6	SL210
			3000K	14,4	
	152 LED/M		3500K		
CRI>90		4000K			

## Linear Light 0808

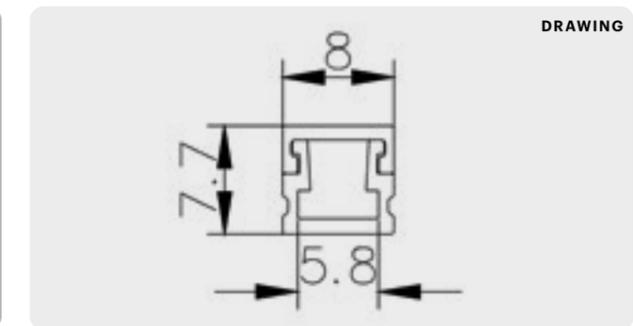

### COMPATIBLE STRIP

POLAR		WIDTH	CCT	POWER(W)	CODE
UNIT CUT 25MM	24V	5	2700K	9,6	SL110
	240 LED/M		3000K	14,4	
			3500K		
	CRI>80		4000K		
ARCTIC		WIDTH	CCT	POWER(W)	CODE
	UNIT CUT 13MM	4 (RIGID)	2700K	9,6	SL210
			3000K	14,4	
	152 LED/M		3500K		
CRI>90		4000K			

# MB 60 II

CE cULus RoHS IP20

Recessed mounted dotted lamp with oriented light beam.



### DESCRIPTION

Recessed mounted aluminum linear profile with elegant dotted LED module design.  
 Also available for magnetic fixing, easily blends into a variety of styles for uniform precision illumination.  
 Various selectable LED beam angles: 37°, 42°, or 84°.  
 Available in custom length up to 3000mm; input and extension cable length also customizable.  
 Dimmable drivers available upon request.

### FINISHES

Available in black or white finish.

### INTENDED USE


Ideal for lighting niches, display cases, shelves and bookcases in any commercial environment.



# MB 60 II

12V

(mm)

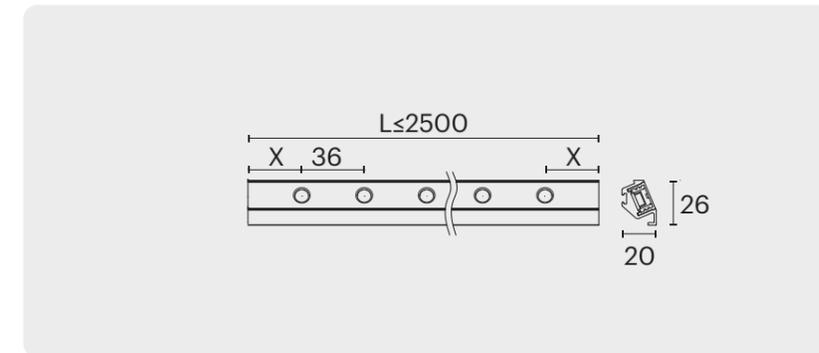

### ILLUMINANCE

Model	H cm	Ø cm	LUX
8,7W - 9 LED	30	15	21251
3500K	50	20	11954
42°	60	29	5313
	100	49	1913
	300	147	213

MB 60 II	V IN (DC)	LED W	EFFICIENCY	CRI	SCDM	BEAM ANGLE	CCT	FINISH
Magnetic installation	12V	1W / LED	79lm/W	Ra95	<3 Step	42°	3500K	01 white
36mm LED spacing							4000K	03 black

LINEAR LIGHTS AND LED STRIPS

# Nano Tubular II

CE RoHS IP20

Surface mounted lamp with direct light beam.



**DESCRIPTION**

Aluminum linear profile with opal diffuser and end caps. Slim lamp body with magnetic fixing and hidden wire design, easily blends into a variety of styles for soft and even illumination with excellent luminous efficacy performance. Available in custom length up to 3000mm; input and extension cable length also customizable.

**INTENDED USE**

Ideal for lighting niches, display cases, shelves and bookcases in any commercial environment. Also suitable for architectural applications where continuous illumination defines surfaces, edges and volumes.

**FINISHES**

Available in aluminium finish.




ALUMINIUM

12

# Nano Tubular II

24 V

(mm)

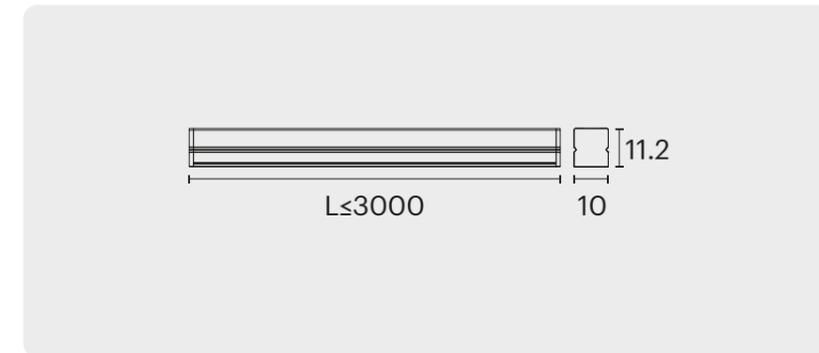

**ILLUMINANCE**

Model	H cm	Ø cm	LUX
500mm	30	98	839.9
3W (6W/m)			
3000K	50	163	302.4
120°	60	196	210
	100	327	75.6
	300	980	8.4


NANO TUBULAR II	V IN (DC)	LED W	EFFICIENCY	CRI	SCDM	BEAM ANGLE	CCT	FINISH
Magnetic installation	24 V	6W/m	85lm/W	Ra95	<3 Step	120°	2700K	12 aluminium
240 LEDs/m		10W/m					3000K	
		15W/m					3500K	
		19W/m					4000K	

LINEAR LIGHTS AND LED STRIPS

# Norma

CE RoHS IP20

Surface/recessed mounted lamp with direct light beam.

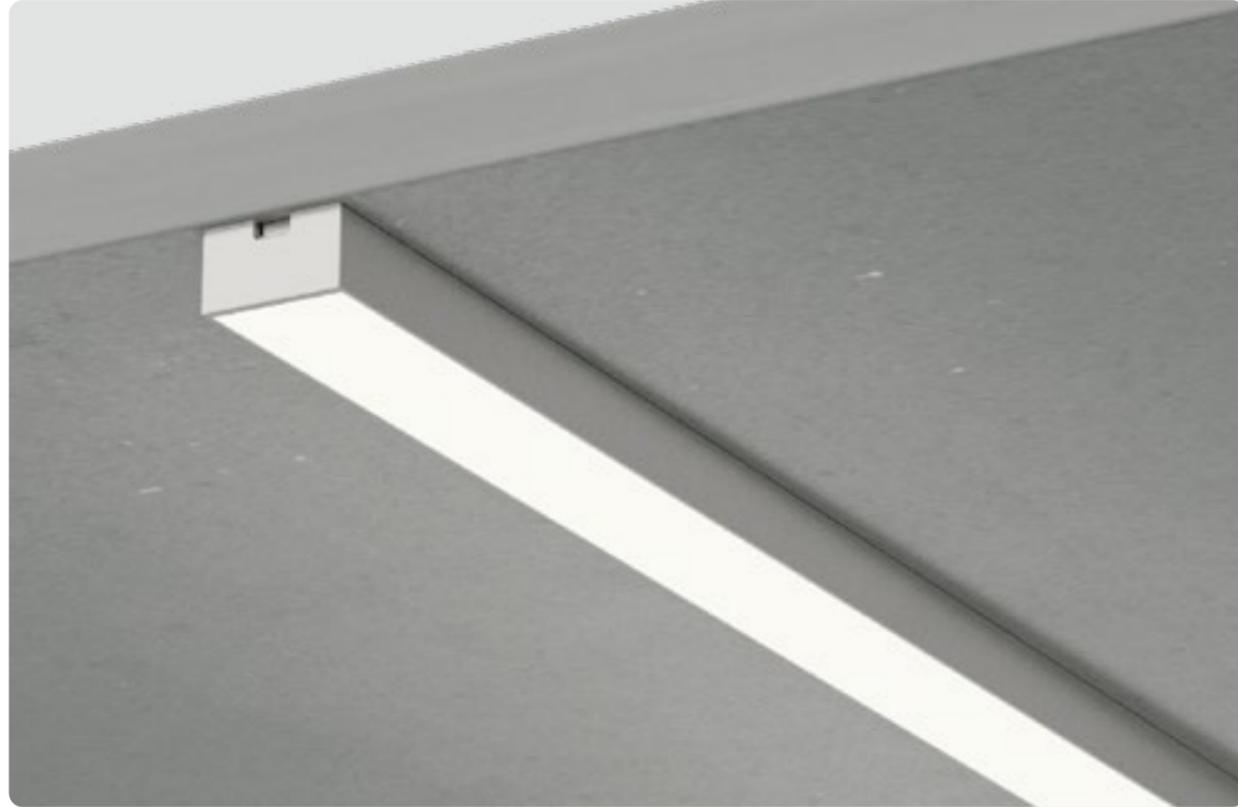

## DESCRIPTION

Aluminum linear profile with opal diffuser and end caps. Can be surface mounted with integrated magnet or recessed mounted with plastic clips.

Slender lamp body with hidden wire design, soft illumination with high luminous efficacy performance.

Available in custom length up to 3000mm; input and extension cable length also customizable.

Dimming power supply available on request.

## FINISHES


Available in aluminium finish.

## INTENDED USE

Ideal for lighting niches, display cases, shelves and bookcases in any commercial environment.

Also suitable for architectural applications where continuous illumination defines surfaces, edges and volumes.


## ALUMINIUM

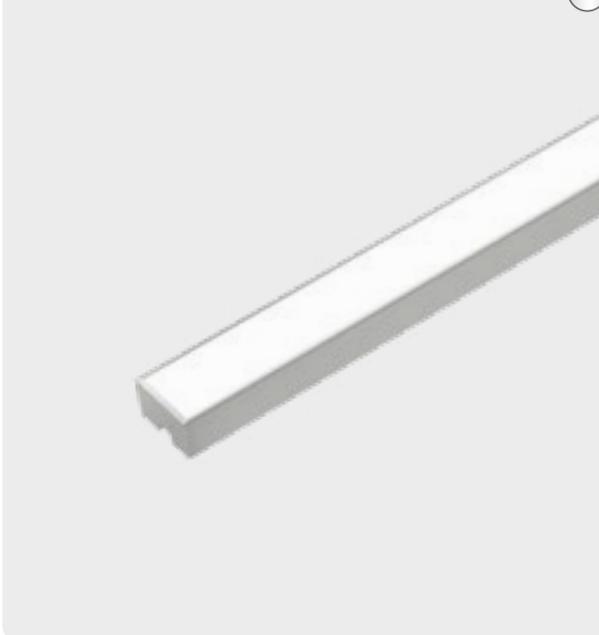

# Norma

24 V

(mm)

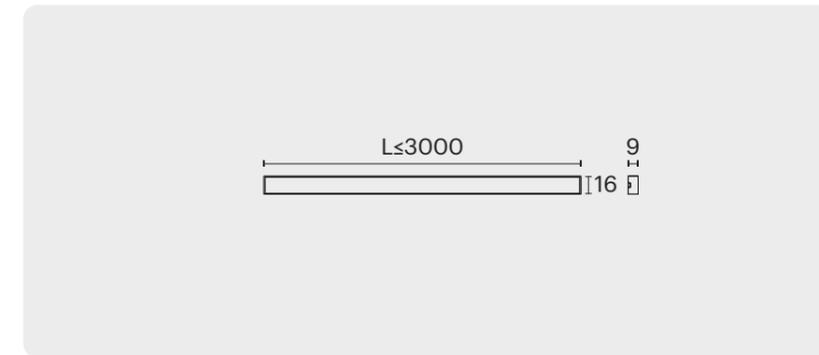

## ILLUMINANCE

Model	H cm	Ø cm	LUX
500mm 3W (6W/m) 3000K 120°	30	94	1171
	50	157	422
	60	188	293
	100	313	105
	300	939	12

NORMA	V IN (DC)	LED W	EFFICIENCY	CRI	SCDM	BEAM ANGLE	CCT	FINISH
Magnetic installation	24 V	6W/m	109lm/W	Ra95	<3 Step	120°	2700K	12 aluminium
240 LEDs/m		10W/m	(3500K)				3000K	
		15W/m					3500K	
		19W/m					4000K	

# Norma PRO



Surface mounted lamp with direct light beam.



## DESCRIPTION


Aluminum linear profile with opal diffuser and end caps. Magnetic fixing and hidden wire design, integrates perfectly with all kinds of display racks, blending into a variety of styles for soft and even illumination with excellent luminous efficacy performance. Available in custom length up to 3000mm; input and extension cable length also customizable.

## INTENDED USE

Ideal for lighting niches, display cases, shelves and bookcases in any commercial environment. Also suitable for architectural applications where continuous illumination defines surfaces, edges and volumes.

## FINISHES

Available in black or aluminium finish.

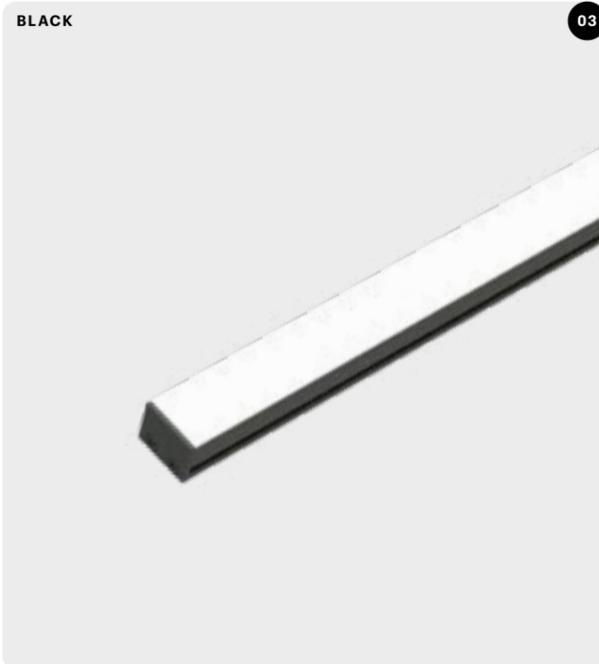


BLACK

03

# Norma PRO

24 V

(mm)

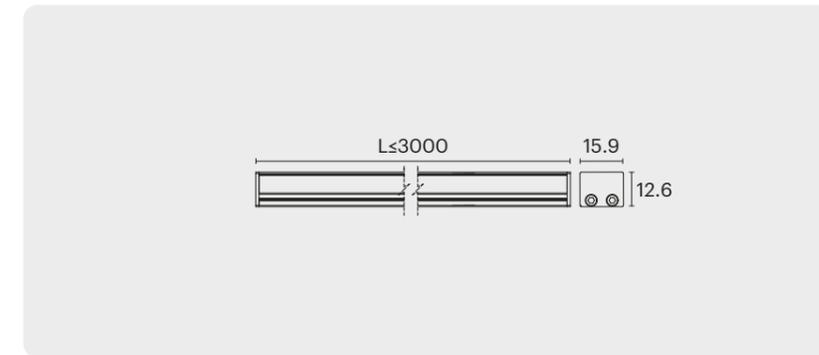

## ILLUMINANCE


Model	H cm	Ø cm	LUX
500mm	30	92	2504
11W (22W/m) 3000K	50	154	901
120°	60	185	626
	100	308	225
	300	923	25

NORMA PRO	V IN (DC)	LED W	EFFICIENCY	CRI	SCDM	BEAM ANGLE	CCT	FINISH
Magnetic installation	24 V	6W/m	60lm/W	Ra95	<3 Step	120°	2700K	12 aluminium
240 LEDs/m		10W/m	(3000K, 19W/m)				3000K	03 black
		15W/m		3500K				
		19W/m		4000K				

# Norma PRO 45



Surface mounted lamp with oriented light beam.

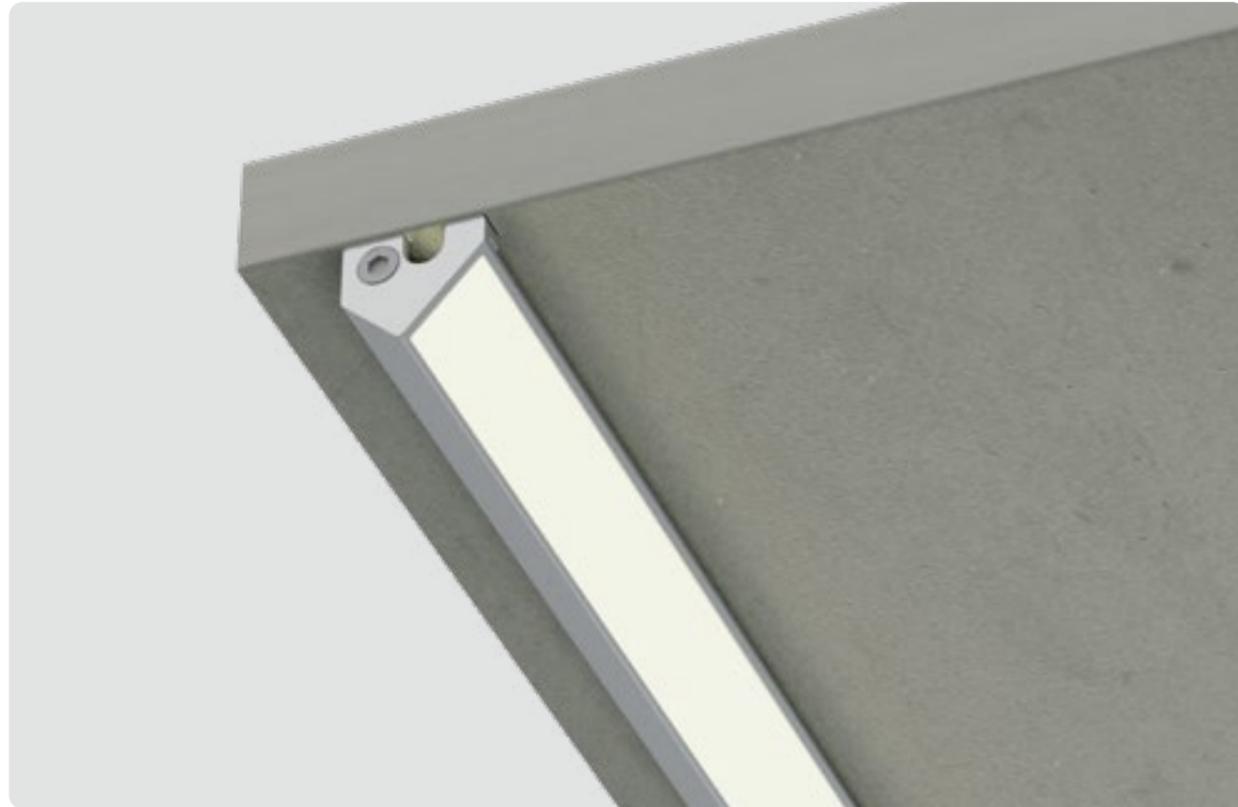

## DESCRIPTION

Aluminum linear profile with opal diffuser and end caps. Magnetic fixing and hidden wire design, features a 45° inclined directional lighting for precise and uniform illumination with excellent luminous efficacy performance. Available in custom length up to 3000mm; input and extension cable length also customizable.

## INTENDED USE

Ideal for lighting niches, display cases, shelves and bookcases in any commercial environment. Also suitable for architectural applications where continuous illumination defines surfaces, edges and volumes.

## FINISHES


Available in black or aluminium finish.



# Norma PRO 45

24 V

(mm)

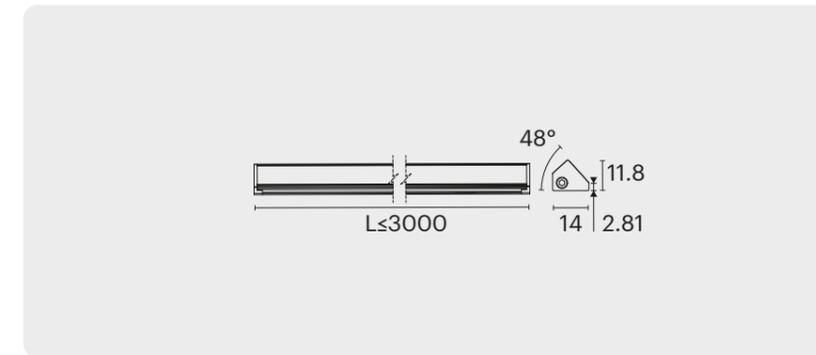

## ILLUMINANCE

Model	H cm	Ø cm	LUX
600mm	30	71	2590
11W (19W/m) 3500K	50	119	932
120°	60	143	647
	100	238	233
	300	714	26


NORMA PRO 45	V IN (DC)	LED W	EFFICIENCY	CRI	SCDM	BEAM ANGLE	CCT	FINISH
Magnetic installation	24 V	6W/m	77lm/W	Ra95	<3 Step	120°	2700K	12 aluminium
240 LEDs/m		10W/m	(3500K, 19W/m)				3000K	03 black
		15W/m					3500K	
		19W/m					4000K	

LINEAR LIGHTS AND LED STRIPS

# Nano Norma 45



Surface mounted lamp with oriented light beam.

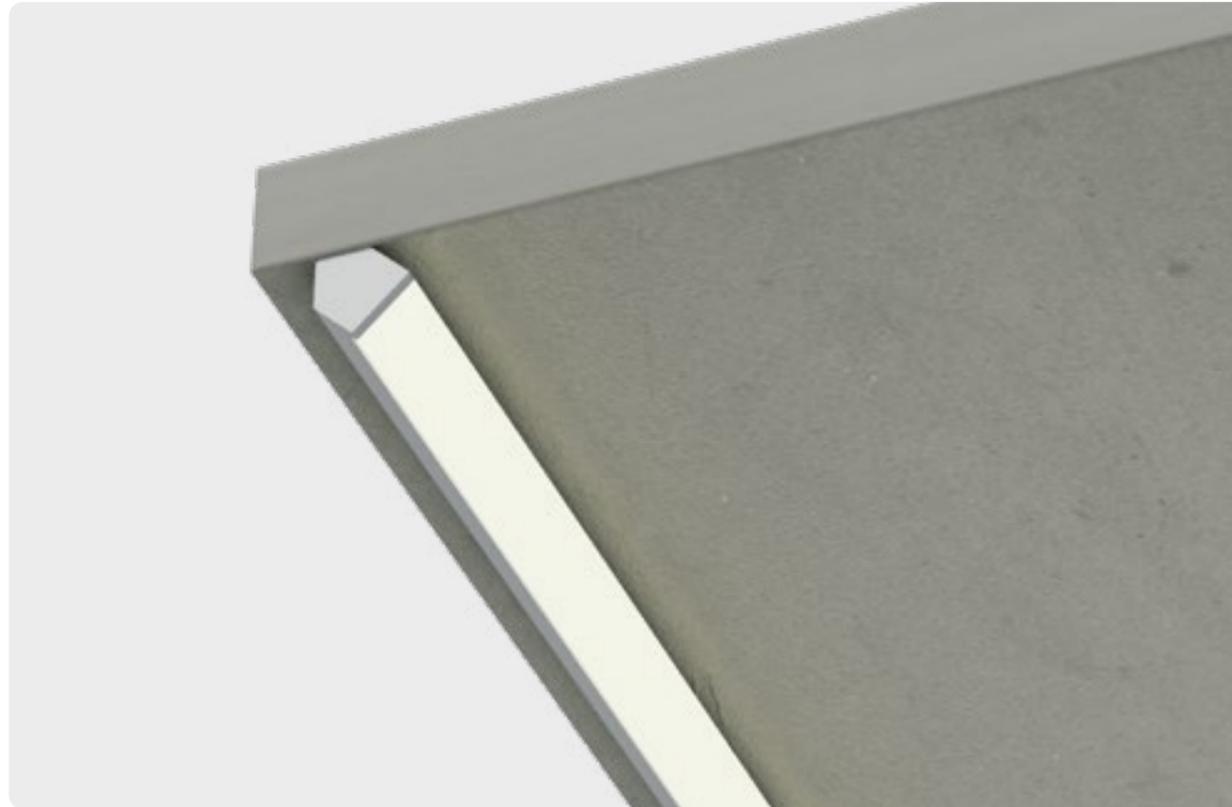

**DESCRIPTION**

Aluminum linear profile with opal diffuser and end caps.

Slim lamp body with magnetic fixing and hidden wire design, features a 45° inclined directional lighting for precise and uniform illumination.


Available in custom length up to 3000mm; input and extension cable length also customizable.

**FINISHES**

Available in black or aluminium finish.

**INTENDED USE**


Ideal for lighting niches, display cases, shelves and bookcases in any commercial environment. Also suitable for architectural applications where continuous illumination defines surfaces, edges and volumes.

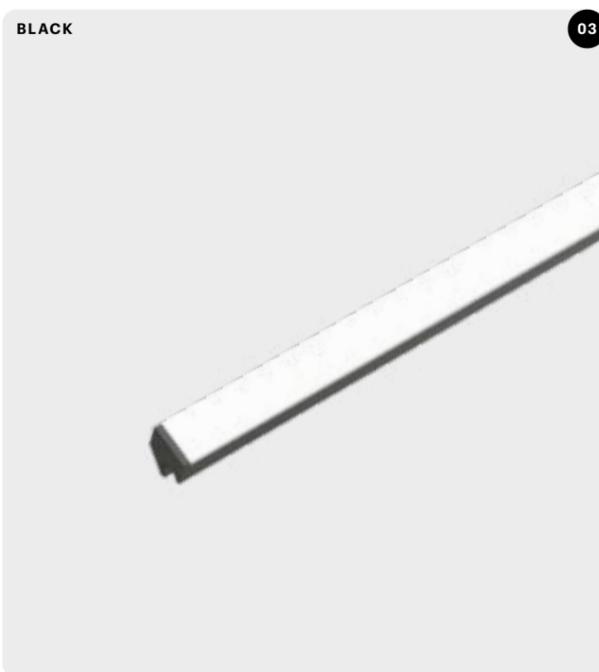

# Nano Norma 45

24 V

(mm)

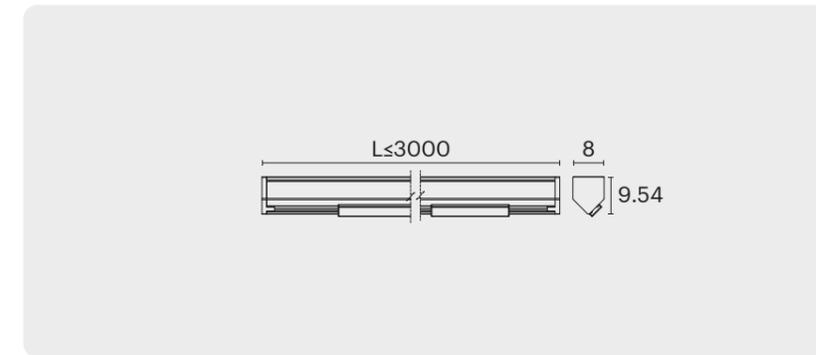

**ILLUMINANCE**

Model	H cm	Ø cm	LUX
500mm	30	275	155
10W (11W/m)			
3000K	50	549	39
110°	60	824	17
	100	1099	10
	300	1373	6

NANO NORMA 45	V IN (DC)	LED W	EFFICIENCY	CRI	SCDM	BEAM ANGLE	CCT	FINISH
Magnetic installation	24 V	6W/m	48,8lm/W	Ra95	<3 Step	110°	2700K	12 aluminium
160 LEDs/m		10W/m	(3000K, 19W/m)				3000K	03 black
		15W/m					3500K	
		19W/m					4000K	

LINEAR LIGHTS AND LED STRIPS

# Mini

Surface mounted lamp with a 35° angled light output.



## DESCRIPTION

The Mini is a discreet and versatile linear light. It offers easy installation with magnets already attached. With a 35° angled light output it's a perfect solution for under-shelf lighting.

## INTENDED USE


Ideal for retail displays, casework, and shelving. Surface mounted via mounting clips.

## FINISHES

Available in black or aluminum.



## SECTION 1:1 (mm)

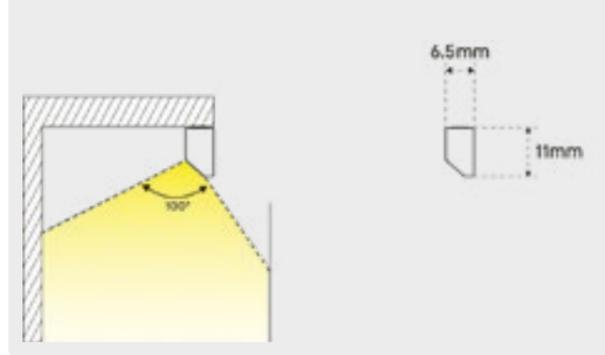

# Mini

## LED LIGHT SOURCE

Available in EDC (Dual Color) or MONO (fixed color temperature) versions

## EMOTION

24 V

LED 7,8W/m | 858lm/m | 110lm/W

LED 15W/m | 1650lm/m | 110lm/W

LED 14,8W/m | 1628lm/m | 110lm/W

CRI=90

120 LEDs/m

DUAL COLOR: 3000K + 5000K



## ILLUMINANCE

Mini  
1000 mm



## SWITCHING AND CONTROL SYSTEMS

### WITHOUT SWITCHING SYSTEM

On-Off control via switched outlet.

Can be used with Smart Home control solutions, transmitters or cabled switching systems for On-Off, dimming and color temperature adjustment.



## POWER SUPPLY

MEC Lite

"Ready-to-light" power supply system with integrated distributor.

NOT INCLUDED

## MEC LITE



## FIXING


Surface-mounted installation.



## ACCESSORIES

Mounting Clips  
OPTIONAL


## MOUNTING CLIPS

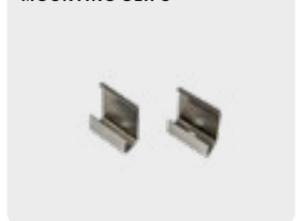

# Mini Noor



Recessed lamp with a 35° angled light output.

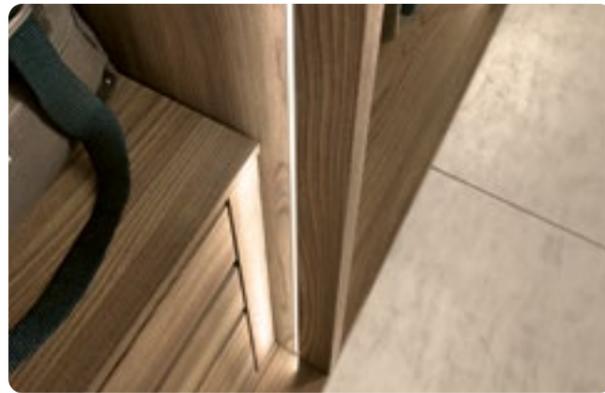

## DESCRIPTION


The Mini Noor is a discreet and versatile linear light for recessed applications.

It offers easy installation with fixing springs already attached.

With a 35° angled light output it is a ideal solution for under-shelf lighting or to illuminate cabinet or closet interiors by installing the fixture along the side panels.

## INTENDED USE

Ideal for retail displays, casework, and shelving. Recessed installation.

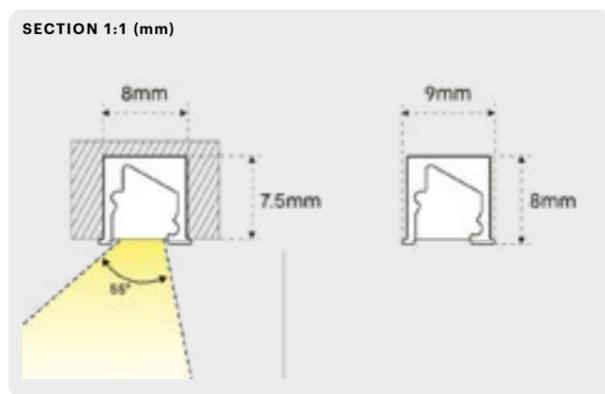

## FINISHES

Available in black



# Mini Noor

## LED LIGHT SOURCE

Available in EDC (Dual Color) or MONO (fixed color temperature) versions

## EMOTION

24 V

LED 8W/m | 1200lm/m | 150lm/W

LED 13W/m | 1950lm/m | 150lm/W

LED 13W/m | 1170lm/m | 90lm/W

CRI=90

112 LEDs/m, 160 LEDs/m

DUAL COLOR: 3000K + 5000K, 2700K + 6500K



## ILLUMINANCE

Mini Noor  
1000 mm



## SWITCHING AND CONTROL SYSTEMS

### WITHOUT SWITCHING SYSTEM

On-Off control via switched outlet.

Can be used with Smart Home control solutions, transmitters or cabled switching systems for On-Off, dimming and color temperature adjustment.



## POWER SUPPLY

MEC Lite

"Ready-to-light" power supply system with integrated distributor.


NOT INCLUDED

## MEC LITE



## FIXING

Recessed installation.

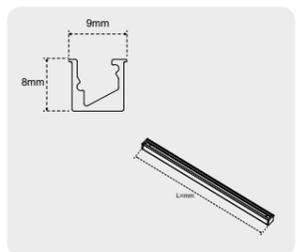

## ACCESSORIES

End Caps

INCLUDED

## END CAPS



# Cali



Surface mounted lamp with a low profile and a 120° beam angle.



## DESCRIPTION

Cali is a surface mounted linear fixture with an extremely low profile.

The diffuser offers a dot-free light effect while maintaining a high light output.

## INTENDED USE



Ideal for retail displays, casework, and shelving. Surface mounted via mounting clips.

## FINISHES

Available in black or aluminum.



## SECTION 1:1 (mm)

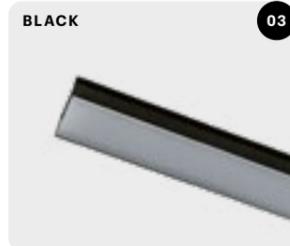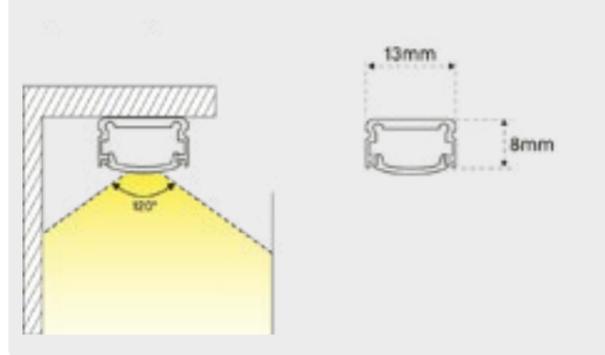

# Cali

## LED LIGHT SOURCE

Available in EDC (Dual Color) or MONO (fixed color temperature) versions

## EMOTION

24 V

LED 8W/m | 1200lm/m | 150lm/W

LED 13W/m | 1950lm/m | 150lm/W

LED 13W/m | 1170lm/m | 110lm/W

CRI=90

112 LEDs/m, 160 LEDs/m

DUAL COLOR: 3000K + 5000K, 2700K + 6500K

G

## ILLUMINANCE

Cali  
1000 mm



## SWITCHING AND CONTROL SYSTEMS

### WITHOUT SWITCHING SYSTEM

On-Off control via switched outlet.

Can be used with Smart Home control solutions, transmitters or cabled switching systems for On-Off, dimming and color temperature adjustment.



## POWER SUPPLY

MEC Lite

"Ready-to-light" power supply system with integrated distributor.

NOT INCLUDED

## MEC LITE



## FIXING

Surface-mounted installation.



## ACCESSORIES

Mounting Clips

INCLUDED

End Caps

INCLUDED

Magnet Brackets

OPTIONAL

## END CAPS



## MOUNTING CLIPS



# Malindi 2



Recessed lamp with a flush surface and a 100° beam angle.



## DESCRIPTION


The Malindi 2 has a recessed design which allows it to be mounted perfectly flush with the surface.

The lens comes either with an overhang or is flush with the profile.

The light output is clean and diode-free.

## INTENDED USE

Ideal for retail displays, casework, and shelving. Recessed installation via fixing springs.

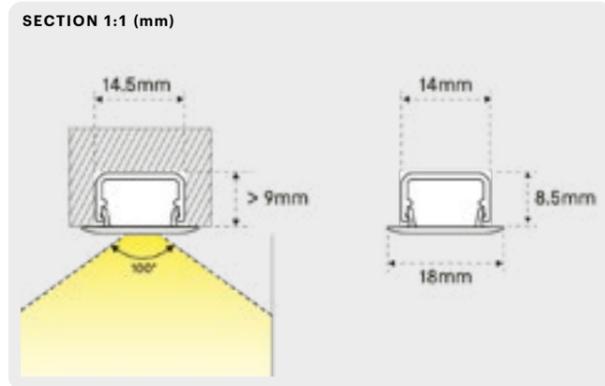

## FINISHES

Available in aluminum.



# Malindi 2

## LED LIGHT SOURCE

Available in EDC (Dual Color) or MONO (fixed color temperature) versions

## EMOTION

24 V

LED 8W/m | 1200lm/m | 150lm/W

LED 13W/m | 1950lm/m | 150lm/W

LED 13W/m | 1170lm/m | 110lm/W

CRI=90

112 LEDs/m, 160 LEDs/m

DUAL COLOR: 3000K + 5000K, 2700K + 6500K

G

## ILLUMINANCE

Malindi 2  
1000 mm



## SWITCHING AND CONTROL SYSTEMS

### WITHOUT SWITCHING SYSTEM

On-Off control via switched outlet.

Can be used with Smart Home control solutions, transmitters or cabled switching systems for On-Off, dimming and color temperature adjustment.



## POWER SUPPLY

MEC Lite

"Ready-to-light" power supply system with integrated distributor.


NOT INCLUDED

## MEC LITE



## FIXING

Recessed installation.

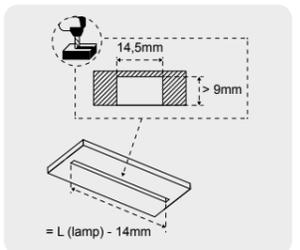

## ACCESSORIES


Fixing Springs

INCLUDED

Magnet Mounting Kit

OPTIONAL


## FIXING SPRINGS

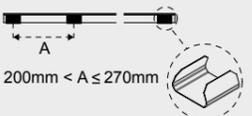


# LED Reel COB – 8mm

24 V ✂

7.8W/m (24 V)	LUMEN/m	LUMEN/W	CRI	EEC	CCT	CODE
MONO: 480 LEDs/m	590 lm/m	75 lm/W	≥ 90	G	3000K	941900319
5000 mm	590 lm/m	75 lm/W			4000K	941900419
	628 lm/m	80 lm/W			5000K	941900420
	649 lm/m	83 lm/W			6000K	941900421

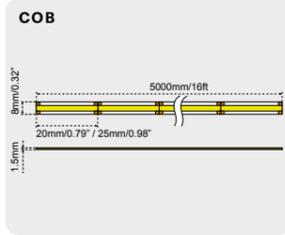


10W/m (24 V)	LUMEN/m	LUMEN/W	CRI	EEC	CCT	CODE
MONO: 400 LEDs/m	960 lm/m	96 lm/W	≥ 90	F	3000K	941900229
5000 mm					3500K	941902883
					4000K	941903503
					5000K	941900805
					6000K	941903504

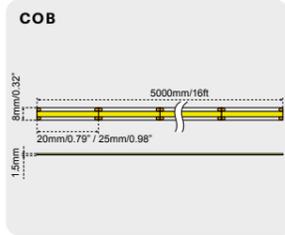

# LED Reel COB Free-Cut – 8mm

24 V ✂


10W/m (24 V)	LUMEN/m	LUMEN/W	CRI	EEC	CCT	CODE
MONO: 528 LEDs/m	650 lm/m	65 lm/W	≥ 90	G	3000K	600400026
5000 mm	700 lm/m	70 lm/W			4000K	600400027
	700 lm/m	70 lm/W			5000K	600400028

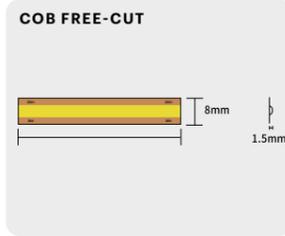


# LED Reel SMD – 5mm

24 V ✂


8W/m (24 V)	LUMEN/m	LUMEN/W	CRI	EEC	CCT	CODE
MONO: 112 LEDs/m	1200 lm/m	150 lm/W	≥ 90	G	2700K	941900047
10000 mm					3000K	941900010
					4000K	941900049
					5000K	1211250
					6000K	941900016

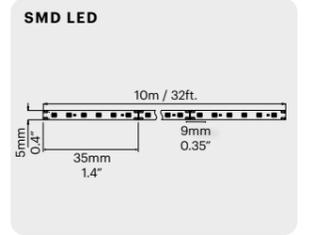

13W/m (24 V)	LUMEN/m	LUMEN/W	CRI	EEC	CCT	CODE
MONO: 160 LEDs/m	1950 lm/m	150 lm/W	≥ 90	F	2700K	941900053
10000 mm					3000K	941900041
					4000K	941900043
					5000K	941900045
					6000K	941900014

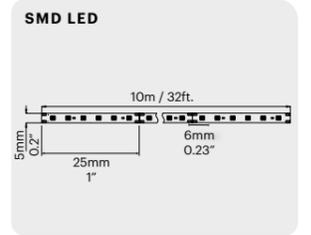


13W/m EDC (24 V)	LUMEN/m	LUMEN/W	CRI	EEC	CCT	CODE
DUAL: 112+112 LEDs/m	1170 lm/m	90 lm/W	≥ 90	F	3000K+5000K	941900229
10000 mm					2700K+6500K	941902883

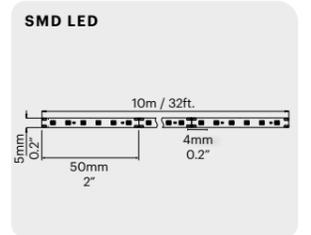

# LED Reel RGB SMD – 10mm

24 V ✂

14.4W/m (24 V)	LUMEN/m	LUMEN/W	EEC	CCT	CODE
RGB: 60 LEDs/m	590 lm/m	40 lm/W	G	RGB	11000121
5000 mm					

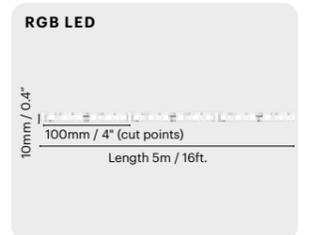


LINEAR LIGHTS AND LED STRIPS

# Cables and connectors

## Power cable (24V)

Solderless power cable for reel-to-driver clip connection of SMD and COB LED strips to MEC Lite.

V IN	LED	L mm	CODE
24V DC	8 mm	100 mm	<b>3002481</b>
	COB	2000 mm	<b>3002482</b>
	5 mm	100 mm	<b>753600011</b>
	SMD	2000 mm	<b>753600012</b>



## EDC Jumper EDC WDC (24V)

Only for EDC/WDC Dual Color LED strips without integrated switching: for color temperature setting during installation.

V IN	LED	L mm	CODE
24V DC	EDC	50 mm	<b>940600015</b>



## Extension (24V)

Extension cable for power cable to LED driver

V IN/OUT	L mm	CODE
24V DC	1100 mm	<b>940600021</b>
	2200 mm	<b>940600022</b>



# Cables and connectors

## Reel-to-Reel Connectors (24V)

Solderless clip connectors for linear or corner connection of SMD and COB LED strip segments.

V IN	LED	L mm	CODE
24V DC	8 mm	Bridge	<b>3002486</b>
	COB	Bridge 90°	<b>753600009</b>
	5 mm	Bridge	<b>753600015</b>
	SMD	Bridge 90°	<b>753600065</b>



## Soft Link (24V)

COB LED strips reel to reel clip connection cable.

V IN	LED	L mm	CODE
24V DC	COB	25 mm	<b>3002483</b>
		300 mm	<b>3002484</b>
		1000 mm	<b>3002485</b>



# Lighting panels

**FLOW**  
**FLOW**  
**FLOW**  
**FLOW**  
**FLOW**  
**FLOW**  
**FLOW**  
**FLOW**  
**FLOW**

Light

Light is an element that must be imagined in the context of the space. It is something that is missing in the absence of the space.

SOLARIS

Solaris

p. 158

LIGHTBOX

Lightbox

p. 166

# Solaris

Lighting panels to enhance spaces and the value of objects in shop, stores and exhibitions. The panels can be integrated in our electrified structures or used in stand-alone scenarios.

Solaris luminous display panels enhance the illuminated object by giving it exceptional visibility, thanks to uniformly diffused natural light that is free from reflections, shadows and glare. Each Solaris panel is made to measure and can be customized in size, shape (even round) and light source type; the front panel can be personalized with prints and graphics, making it a valuable visual communication tool for public and commercial spaces. Solaris is the ideal solution also for museums and retail environments, where optimal lighting improves the visitors' experience, enhancing the artwork and objects on display. The full customization makes the product the perfect choice for any installation.

**IDEAL FOR**

- any residential environment
- retail commerce
- visual communication
- display stands

**FEATURES**

- versatile
- light without shadows
- customizable with printed graphics
- custom dimensions
- furnishin light



LIGHTING PANELS



**SOLARIS LIGH PANELS**

**Exclusively tailor-made.**

Solaris panels can be made, depending on the model, with dimensions up to 2500x1500mm and thicknesses between 11 and 21mm. Customizable in shape, whether square or round, the panels can be personalized with prints and graphics, and are available in different finishes and with different types of LED light sources.

**Solaris T12**

Max. 2500 x 1000 mm  
 Thickness: 11 mm + 1,5mm  
 Illuminated sides: 1 / 2 / 4

- Frameless, very thin
- Reduced perimeter shadow area (7mm)
- Suitable as a luminous back panel for furniture and walk-in closets
- Integrable with decorated front panels for the production of visuals and window displays
- Custom shape



**Solaris L5**

Max. 1500 x 1500 mm  
 Thickness: 21 mm + 0,5mm  
 Illuminated sides: 1 / 2 / 4


- Anodised aluminum frame
- Reduced perimeter shadow area (5mm)
- Suitable for decorative wall applications, such as visual communication
- Option to insert brackets for fixing



**Solaris Full Light**

Max. 2500 x 1500 mm  
 Thickness: 20 mm + 1,5mm  
 Illuminated sides: 2 / 4

- Anodised aluminium frame
- No perimeter shadow area
- Suitable for decorative wall applications, such as visual communication

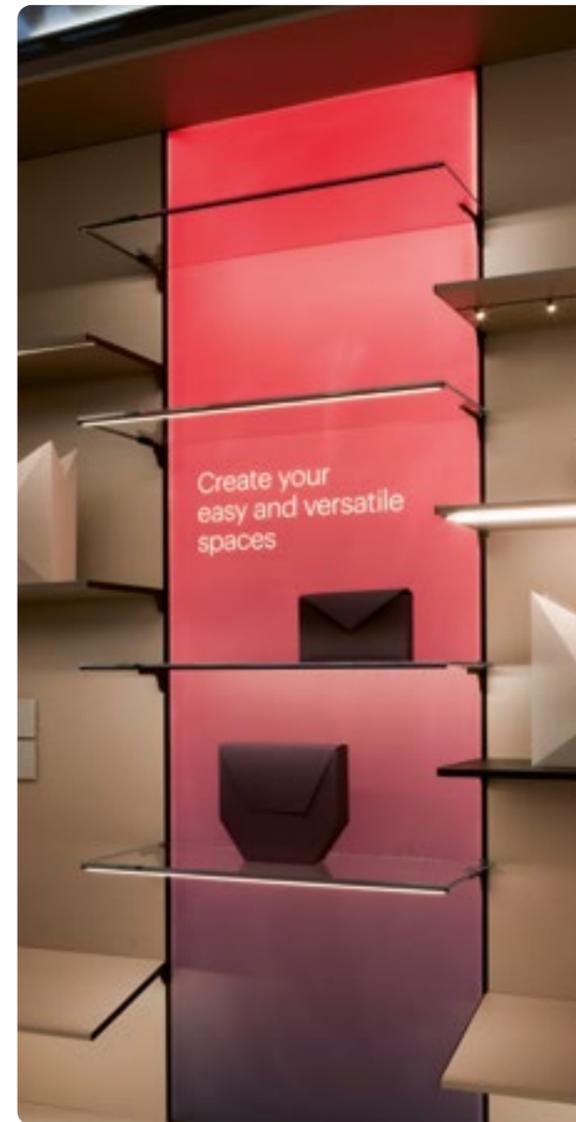

LIGHTING PANELS

# Solaris T12



Backlit panel with diffused light beam



## DESCRIPTION

Frameless, very thin.  
Reduced perimeter shadow area (7mm).


Integrable with decorated front panels (on request) for the production of visuals, window displays, and communication.

Available in "NO DIFFUSER" version without frontal opal panel.

Custom shape.

## INTENDED USE

Suitable as a luminous back panel for furniture and walk-in closets.

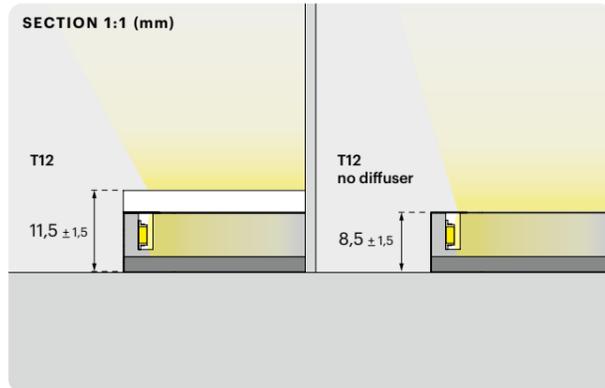

## FINISHES

Available in white finish.



# Solaris T12

## LED LIGHT SOURCE

Available in EDC (Dual Color) or MONO (fixed color temperature) versions

### EDC

24 V

LED 9,2W/m | 1100lm/m | 120lm/W

CRI>90

184x2 LEDs/m

DUAL COLOR: 3000K + 4000K

### MONO (on request)

24 V

LED 7,6W/m | 1100lm/m | 145lm/W


CRI>90

184 LEDs/m

2700K      3000K      4000K

## ILLUMINANCE

Solaris T12  
500 x 500 mm  
4 illuminated sides

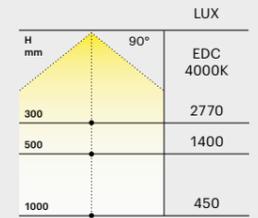

## SWITCHING AND CONTROL SYSTEMS

### WITHOUT SWITCHING SYSTEM

On-Off control via switched outlet.  
EDC jumper cable included, for color temperature setting during installation.

Can be used with Smart Home control solutions, transmitters or cabled switching systems for On-Off, dimming and color temperature adjustment.



## POWER SUPPLY

MEC Lite

"Ready-to-light" power supply system with integrated distributor.

NOT INCLUDED


### MEC LITE



## FIXING

Fixing systems are available depending on the application.

ON REQUEST

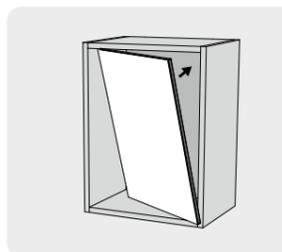

# Solaris T12



**CUSTOM SHAPE**  
Yes, on request

**FREESTANDING**  
No

**PRINTABLE (ON OPAL)**  
Yes

**WEIGHT**  
T12: 13 Kg x m<sup>2</sup>  
T12 no diffuser: 10 Kg x m<sup>2</sup>

**N° ILLUMINATED SIDES**  
1 (short side < 200 mm)  
4 (short side > 200,1 mm)

**N° CABLE EXITS**  
1 on the back  
(side exit on request)

**T12**

11,5 ± 1,5

**T12 no diffuser**

8,5 ± 1,5

Cable exit can be customized at any corner of the back

SOLARIS T12	CCT	FINISH	MAX mm	MAX WATT	CODE
Without switching system EDC jumper cable included, for color temperature setting during installation. Dimmable.	EDC 3000K+4000K	Ⓜ white	2500x1500 mm	Max 13 W/m Max 72W per cable exit	<b>Configurable on request</b>



LIGHTING PANELS

# Lightbox

Light as visual language, conveying your brand with elegance and consistency.

The high-performance SEG Lightbox by L&S is the ideal communication tool wherever walls and display spaces need to be transformed into high-impact narrative surfaces: a communication platform designed to transform any commercial space, enhancing identities, collections, and campaigns with extraordinary visual impact and strengthening the brand by making every environment memorable.



Perfect light, immediate emotion: the SEG Lightbox combines high-efficiency LED technology, minimalist design, and an interchangeable graphic system, becoming a strategic tool for retailers willing to stand out.

## KEY FEATURES

- Tailored to the mm
- High-efficiency LED lighting
- Uniform light across the entire surface
- Intense, true-to-life colors
- Low energy consumption
- Long operating life
- Easily interchangeable graphics
- Smart control with MEC Lite

## KEY BENEFITS AT A GLANCE

- 4000K Standard color temperature (6000K upon request). Fully customizable in width and height to suit any display requirement. Max. dimensions 3048x3048mm (W x H). Maximum flexibility with three different depths available:
  - 40 mm: standard light diffusion
  - 55 mm: enhanced light diffusion
  - 64 mm: premium light diffusion
- SEG (Silicone Edge Graphics) system for quick and easy insertion and removal of printed graphics, allowing immediate updates for seasonal promotions or rebranding.

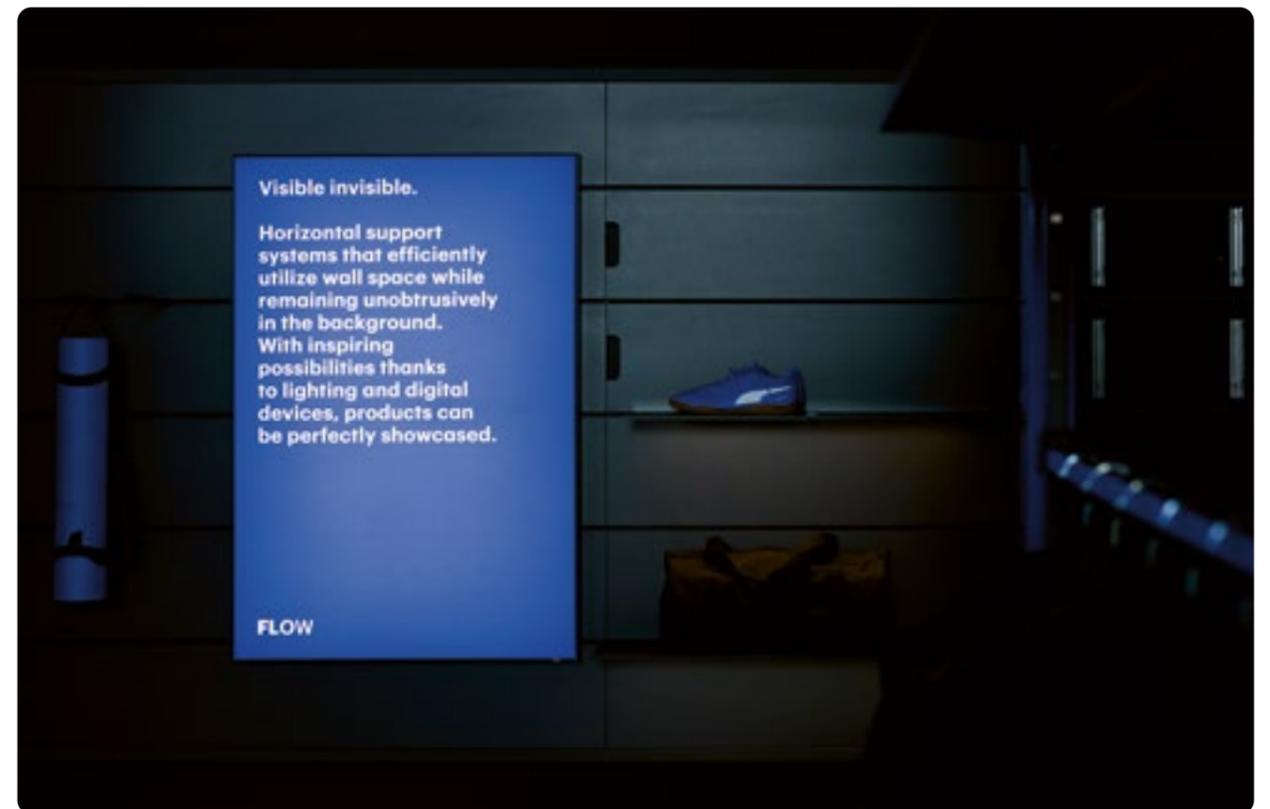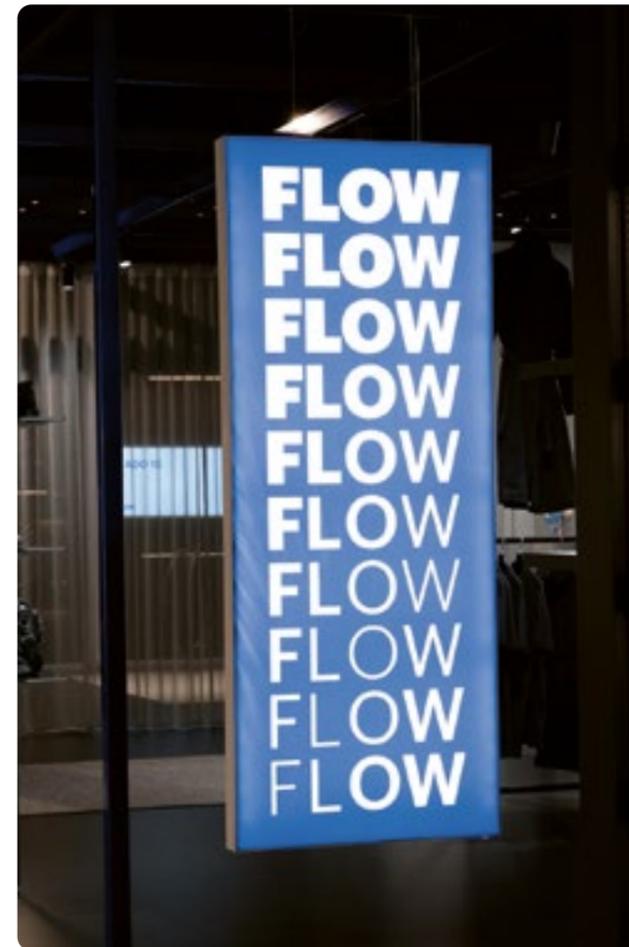



LIGHTING PANELS



# Modular systems

## ELECTRIFIED STRUCTURES

Invisible 6	p. 172
Hi Line	p. 174
Xero 4 EVO	p. 176
Thin line	p. 180
Beam EVO	p. 182
Spatio	p. 184
Multi-Lane	p. 186
Mono 20	p. 188
Qubo Ceiling	p. 190
Qubo M	p. 192
Qubo 25	p. 194
Omnio	p. 196

# Invisible 6




Invisible design: the unobtrusive horizontal aluminium profile of the Invisible 6 system puts the spotlight on merchandise. It lends structure to walls through customised configurations.

The merchandise supports and fittings can be inserted anywhere in the profile and repositioned or removed as required. The electrified rail (24V) integrated in the Invisible 6 profile supplies power along its entire length to shelves with lighting, digital devices and other appliances.

Its minimal design ensures seamless integration into diverse spatial concepts and establishes a consistent architectural framework. Built from durable materials and defined by a timeless design language, the system supports long-term use and can be reconfigured and reused as concepts evolve without losing its clarity.

#### KEY BENEFITS AT A GLANCE

- Electrification allows the incorporation of digital devices and lighting
- Optionally available without electrification
- Shadow gap lends elegant structure to interiors
- Merchandise supports and fittings are simply hooked into the profiles
- Optional use of Change substructure: profiles can be effortlessly added or adjusted in height
- Simple to assemble and reconfigure
- Suitable for heavy goods
- CE-compliant and UL-certified

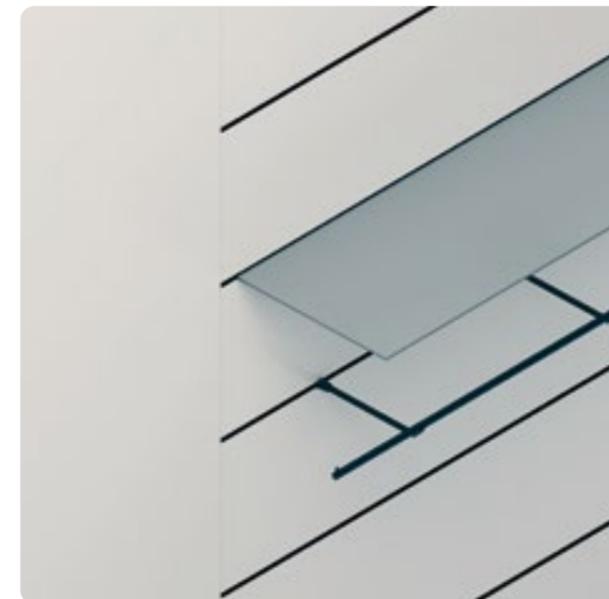

# Hi Line



Modular electrification system with integrated lighting for horizontal panelling. It integrates linear lighting, creating blades of diffused light with great visual impact.

The structural aluminum profiles conceal a practical track electrification system that allows for the integration of elegant aluminum shelves with built-in lighting into the paneling. This is an aesthetic and functional solution that eliminates the need for visible cables and simplifies the installation process. Hi Line is a customizable and versatile system that enhances living and exhibition spaces with the option to integrate aluminum storage modules, linear lighting, or Solaris light panels to create captivating light effects.

#### A WALL OF OPPORTUNITIES

The modular electrified structure can be installed as either a floor-mounted or suspended element and can be integrated with upper or lower linear wall-washer lighting. Hi Line is compatible for use with wooden back panels up to 19mm (by the furniture maker).

#### KEY BENEFITS AT A GLANCE

- Modular and versatile
- Easy installation
- Cable-free electrification of shelves
- Decorative lighting and furniture element



# Xero 4 EVO



Clear lines for flexible presentations. Xero 4 EVO combines a slim aluminium profile with integrated electrification. The system creates a precise foundation for adaptable presentations on walls and in mid-floor areas.


Xero 4 EVO structures surfaces without dominating the space. Merchandise supports and electrified shelves are integrated directly into the vertical slot of the profile. The wall becomes a functional surface. Support rods, front arms and additional merchandising elements extend the presentation options. The design remains freely configurable, independent of axes and open to change.

#### TECHNOLOGY WHERE IT COUNTS

Power is available exactly where products are placed. Wireless and invisible. Electrified shelves allow targeted illumination of the merchandise. Technology stays in the background, while the space appears calm and clearly structured. The narrow slot reads as a subtle shadow gap and visually defines the system.

#### KEY BENEFITS AT A GLANCE

- Axis independent planning
- 5 millimeter narrow slot
- Integrated electrification within the profile
- Wireless power supply for shelves made of wood, glass and other materials
- Product carriers and merchandising elements available in various finishes
- Suitable for heavy goods

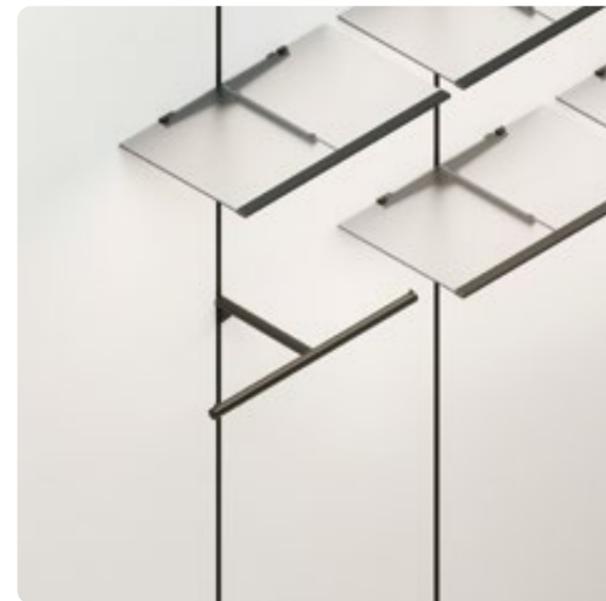

# Xero



The core element of Xero is a vertical aluminium profile. The modular system structures wall surfaces and can be used flexibly along a single axis or in combined wall units.

**Xero Twin:** Flexible positioning made simple

Shelves and merchandise supports hook in without tools and can be repositioned or recombined at any time. The double slot profile allows multiple supports to be placed parallel directly next to each other. Supports for axis independent presentations open up greater design freedom. Products move beyond a fixed grid and can be staged more freely in space. Panels fit precisely between the profiles and can be exchanged or repositioned at any time, keeping wall configurations adaptable as assortments evolve.

Electrification is invisibly integrated into the profile as part of the architectural structure. LED merchandise supports receive power automatically when inserted. The 24-volt system supplies lighting and enables the integration of digital devices.

**Xero L:** Precise solutions for niches and cabinets

Xero L complements the system wherever closed wall surfaces are required. The system is ideal for niches, cabinets and lateral finishes. Based on the same system logic, Xero L connects seamlessly with Xero Twin. For multi axis product presentations, the combination of both systems expands the design possibilities. As a finishing profile, Xero L creates a clear edge and ensures calm transitions in the overall appearance.

#### KEY BENEFITS AT A GLANCE

- Integrated electrification for lighting and digital applications
- High degree of planning and design freedom
- Supports for axis dependent and axis independent presentations
- Interchangeable panels for flexible adjustments
- Clean shadow gap for clear wall structuring
- Suitable for heavy products
- Available without electrification
- UL certified



# Thin Line



Modular electrification system with integrated lighting for vertical panelling. Variety of configurations with refined aesthetics.

The core of the system is an innovative electrified concept (patented) to move and mount illuminated shelving units with ease, in a practical and safe way without visible connections or cables. The system is very versatile and can be integrated in any commercial environments, enhancing specific areas.


The minimal space between panels produce a clean and continuous surface. Wireless power management elevating the aesthetics of the installation, allowing you to illuminate and reconfigure the wall with maximum simplicity in complete autonomy.

**BESPOKE SOLUTIONS**

We develop fully customized solutions, giving customers complete creative freedom to enhance the value of projects. Each custom Thin Line component is co-developed in close collaboration with the client and manufactured in-house, ensuring seamless technical compatibility: a tailored approach where expertise and manufacturing excellence blend to transform ideas into functional products for any commercial concept.

**KEY BENEFITS AT A GLANCE**

- Modularity
- Versatility
- No need for connectors
- Ideal for: clothing, eyewear, fashion accessories, cosmetic, pharmacy, luxury retail

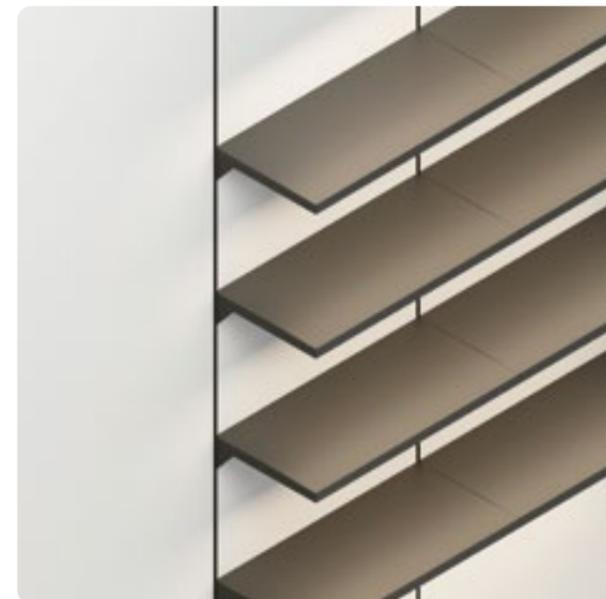

# Beam EVO



Beam EVO translates the principle of the vertical support system into a understated wall solution. The system combines load capacity and design into a clear line that structures product presentation and leaves room for different display concepts.



The modular system approaches presentation from the point of use. Wherever products are placed, power is available. The merchandise supports draw energy via an integrated current collector that runs discreetly within the profile and is ready for immediate use. This allows lighting to be applied precisely without making additional technology visible.

#### VERSATILE WALL SOLUTION

Beam EVO offers a high degree of planning freedom. The system is not bound to fixed axes and can be positioned independently of the profile grid. Merchandise supports are hooked into the profile from the front and can be adjusted in height without being removed. The absence of visible slots creates a calm and reduced visual language.

#### KEY BENEFITS AT A GLANCE

- Integrated electrification
- LED illuminated shelf brackets
- Compatible with concrete and brick walls as well as wood and glass panels
- Suitable for heavy goods

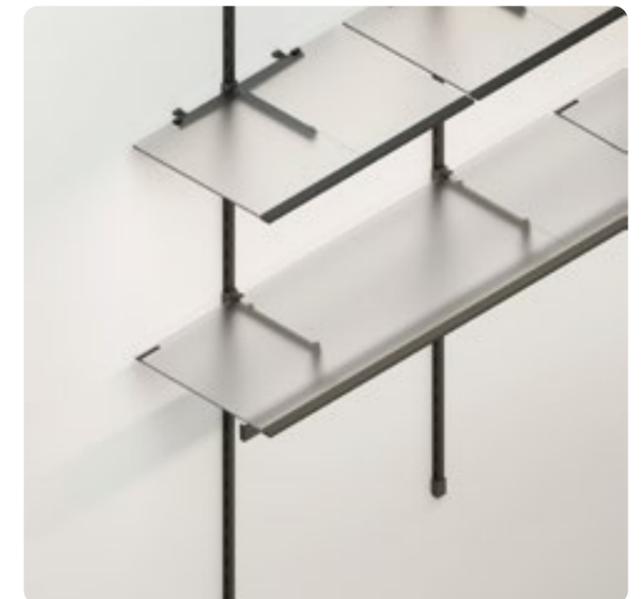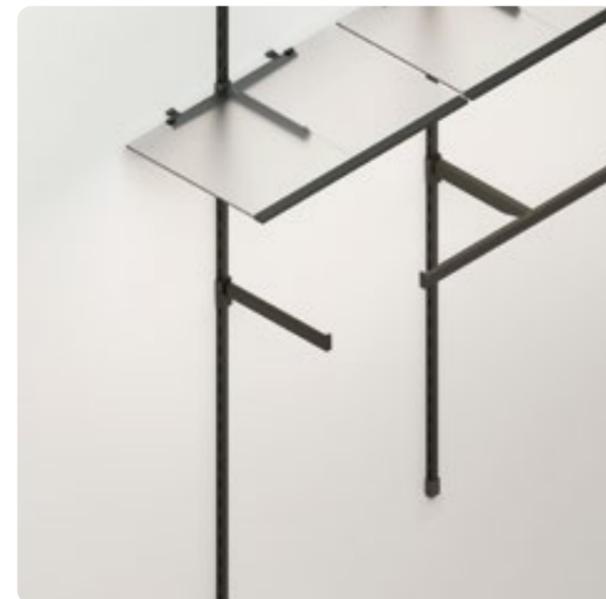

# Spatio



Spatio is a structural system that provides the framework for adaptable interior concepts. Based on a modular grid of aluminium profiles and steel uprights, it defines zones without limiting creative freedom.

Designed as a freestanding and expandable system, Spatio delivers architectural clarity and unlocks new potential for retail spaces, offices, and exhibition spaces.



Spatio is available in various sizes. Lengths, widths, and materials can be adapted to meet specific project requirements. Merchandise frames, panels, and curtains can be seamlessly integrated into the profile system. Integrated electrification enables lighting of the areas and power supply for various devices.

#### MATERIAL QUALITY AND DESIGN CUSTOMISATION

Spatio is crafted from durable, high-quality materials, many of which are recyclable or reusable within a circular system. Surfaces, walls, curtains, and add-ons can be customized to suit individual design preferences, offering greater creative freedom. This material and colour flexibility enables a coherent, site-specific expressions of brand identity.

#### KEY BENEFITS AT A GLANCE

- Modular system adaptable to any spatial concept
- Integrated electrification with built-in power and lighting
- Minimalist design that highlights architecture, products and brands
- Quick installation without structural connections
- Material and color flexibility: combine wood, fabric, glass or metal
- Multifunctional use for retail architecture, exhibitions, offices and event spaces

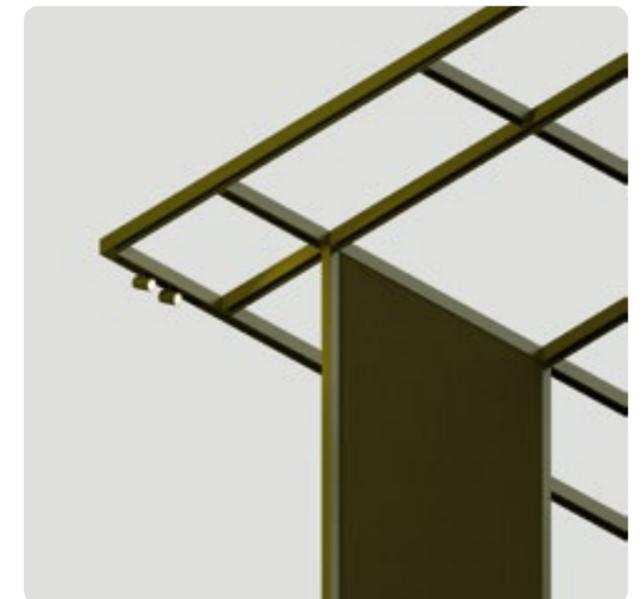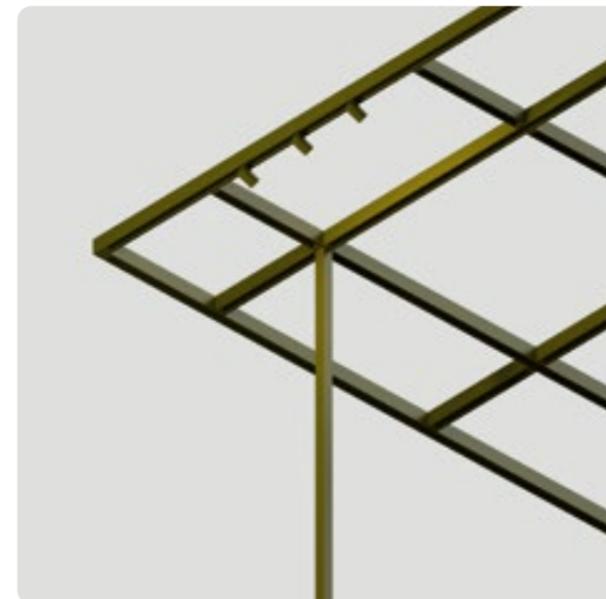

# Multi-Lane



Merchandise presentations and room lighting in a single rail: the ceiling rail system Multi-Lane is installed directly under the ceiling.

The profiles of Multi-Lane can be equipped with merchandise supports and ceiling luminaires, as well as elements that serve to structure and separate spaces or conceal utility installations. The electrified version integrates power rails, eliminating the need for raised floors, floor boxes or visible cables. Merchandise frames with integrated 24 volt power and ceiling lighting with 230 volt can be installed side by side. LED-spotlights and digital devices such as cameras or monitors receive power instantly through a simple connection.

Multi Lane supports multiple layout concepts, from free floating frames with optional floor fixing to mobile presentation units and display uprights. Flexible wall panels divide and structure space as needed. The system adapts easily to temporary installations and changing requirements.

#### KEY BENEFITS AT A GLANCE

- Easy reconfiguration of entire spaces
- Electrification allows the incorporation of digital devices and lighting
- Flexible and customised layouts
- Suitable for both lightweight and heavy goods
- Optionally available with electrification
- UL-certified



# Mono 20



Mono is a single point support system that brings structure and clarity to wall displays. Its discreet 20 millimetre socket integrates electrification and opens up new possibilities for lighting and digital applications.

Merchandise supports latch securely into the round socket and are protected against twisting or accidental removal. The minimalist design keeps the focus on the product while ensuring stability and precision.

Mono 20 can be arranged in any layout and adapts to a wide range of sectors and product types. For lighter goods, Mono 12 offers the same design principle in a slimmer format. Together, the system provides maximum planning freedom with minimal visual presence.

#### KEY BENEFITS AT A GLANCE

- Electrified for digital devices and lighting
- Freely positionable, independent of axis
- Suitable for both lightweight and heavy goods
- Several sockets can be used to hold the same merchandise support
- Optionally available in a non-electrified version
- UL-certified



# Qubo Ceiling




The perfect upright for any presentation: Qubo Ceiling is mounted between the ceiling and the floor, placing the focus on the merchandise with its minimalist design.

Whether freestanding in the mid-room, in the shop window, or in front of a wall – the system offers maximum flexibility. Thanks to its modular design, assembly and disassembly are simple, and it can be sustainably reused in new spaces.

The electrification of Qubo Ceiling is carried out directly through the uprights – either from the ceiling or the floor. Shelves and merchandise holders can be effortlessly hooked in, instantly supplying power to LED lights, digital devices, and other elements. Additional LED spotlights can be flexibly integrated into the sides of the uprights.

#### KEY BENEFITS AT A GLANCE

- Uprights are mounted directly to the existing ceiling
- Suitable for room heights between 2500 – 3200 mm (98" – 138")
- Electrification enables lighting and power supply for digital devices
- Merchandise supports and display elements can be easily installed
- Various design options with materials such as wood or glass
- Delivered partly assembled: space-saving transport and minimal storage space
- Suitable for both light and heavy merchandise
- Available with or without electrification
- UL-certified.

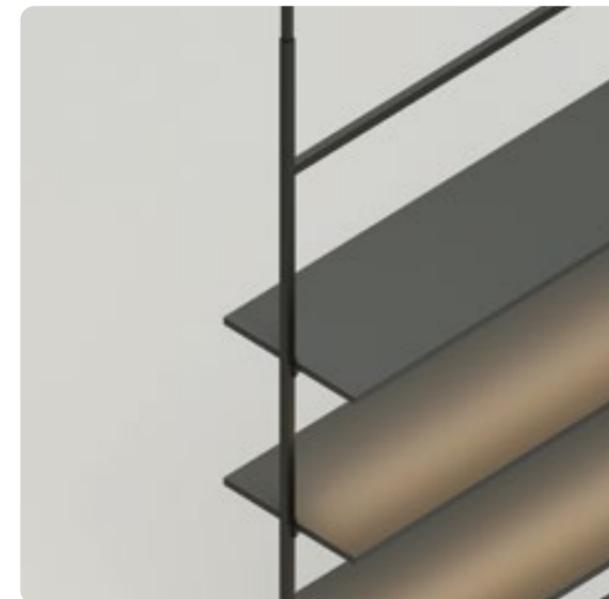

# Qubo M



Mobile and modular: that is the defining essence of Qubo M. The display system offers maximum freedom when it comes to staging new and striking product presentations in mid-floor areas.

Qubo M modules can be configured as bar units, gondolas or display tables and equipped with a wide range of merchandise supports. Integrated electrification is standard. LED shelf frames or spotlights hook in easily and illuminate products immediately. Qubo M integrates seamlessly with wall displays and other Qubo systems.

Supports such as back bars, hanging rails or front arms can be repositioned with ease. End panels, LED light frames and partition panels enable double sided presentations. The modular changing room works as a standalone unit or can be expanded with additional cabins. Castors allow flexible positioning throughout the space.

#### KEY BENEFITS AT A GLANCE

- Mobile Qubo M base frames can be individually configured and easily modified
- Simple assembly thanks to dedicated connection technology
- Integrated electrification and LED lighting for precisely staged displays
- Available with or without electrification
- Flexible design options with wood, metal or glass
- Space saving flatpack delivery, partially pre assembled
- Supplied with castors, adjustable feet available as an option
- Suitable for light and heavy goods
- UL-certified



# Qubo 25



Qubo 25 puts the spotlight on the merchandise: thanks to its understated linear design, the versatile structural shelving system is a modern solution for immaculate displays – in the form of cubes, shelf units, tables, plinths or gondolas.

Qubo 25 can be used to create streamlined structures of varying height and width that are easily modifiable – allowing maximum flexibility for changing product assortments. Thanks to the built-in electrical rails, merchandise supports with LED lighting are instantly powered when inserted into the frame. Digital devices and other equipment such as electrified shelves can also be easily integrated.

#### KEY BENEFITS AT A GLANCE

- Easily adaptable
- Available in various heights, depths and widths
- Wide range of merchandise supports
- Flexible material options including wood, metal and glass
- Optional drawers with wooden or metal panels
- Delivered partly assembled: space-saving transport and minimal storage
- Optionally available without electrification
- Suitable for lightweight and heavy goods
- UL-certified



# Omnio



Omnio offers endless possibilities: the free-standing shelf system with its characteristic round metal tubes is suited for use against the wall or in mid-floor spaces, allowing creative interior layouts.


The uprights and shelf frames come in a variety of sizes and can be assembled into customised structures, easily extended on all four sides.

Thanks to integrated electrification, the cableless shelf frames are instantly powered when inserted into the uprights, facilitating the use of shelf lighting and digital devices for striking merchandise displays. LED spotlights can also be fitted into the uprights.

Omnio is easily modifiable in look and feel: the structures can be extended with additional uprights and shelf frames in response to changing requirements.

#### KEY BENEFITS AT A GLANCE

- Modular configurations for wall and mid-floor use
- Easy to assemble, reconfigure and dismantle
- Integrated electrification and LED lighting
- Wide range of design options with wood, metal or glass
- Optional drawers with wooden or metal panels
- Delivered partly assembled: space-saving transport and minimal storage
- Optionally available without electrification
- Suitable for lightweight and heavy goods
- UL-certified

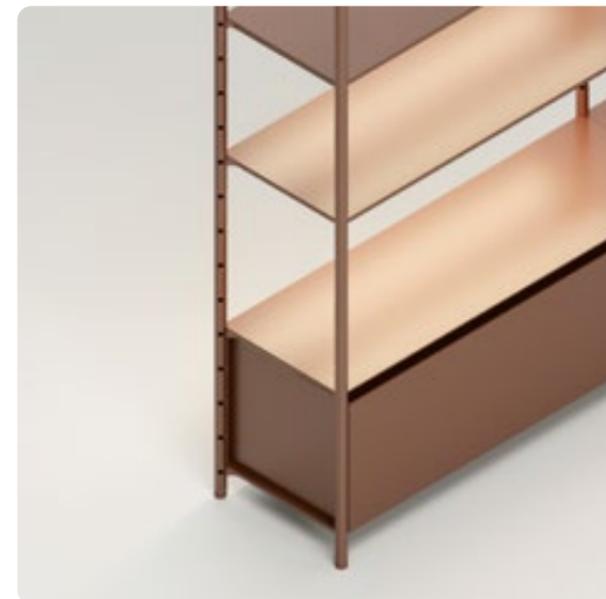

# Drivers and controls



POWER SUPPLY PLATFORM

Mec Lite

p. 200

CONTROL MODULES

Lite MT MATTER

p. 210

Lite BT BLUETOOTH

p. 211

Lite sensor

p. 212

Lite remote

p. 214

Zigbee Module

p. 215

4 channel remote

p. 217

Sensor Module

p. 218

Lite CS CASAMBI

p. 222

Lite DL DALI

p. 223

Wired C

p. 224

# MEC LITE

## Ready-to-light


**MEC LITE**, the new "Ready-to-light" power and control platform for LED lamps.

**MEC LITE** is a multi-certified product with a compact and modular design: equipped with an integrated power distributor, it is **versatile, straightforward and easy to install**. It also includes new intuitive **Smart Home** solutions for light customization and an innovative range of dedicated wireless sensors and transmitters.

**MEC LITE** ensures **greater energy efficiency** compared to the MEC Driver product range, with which it is compatible.



# Ready-to-light

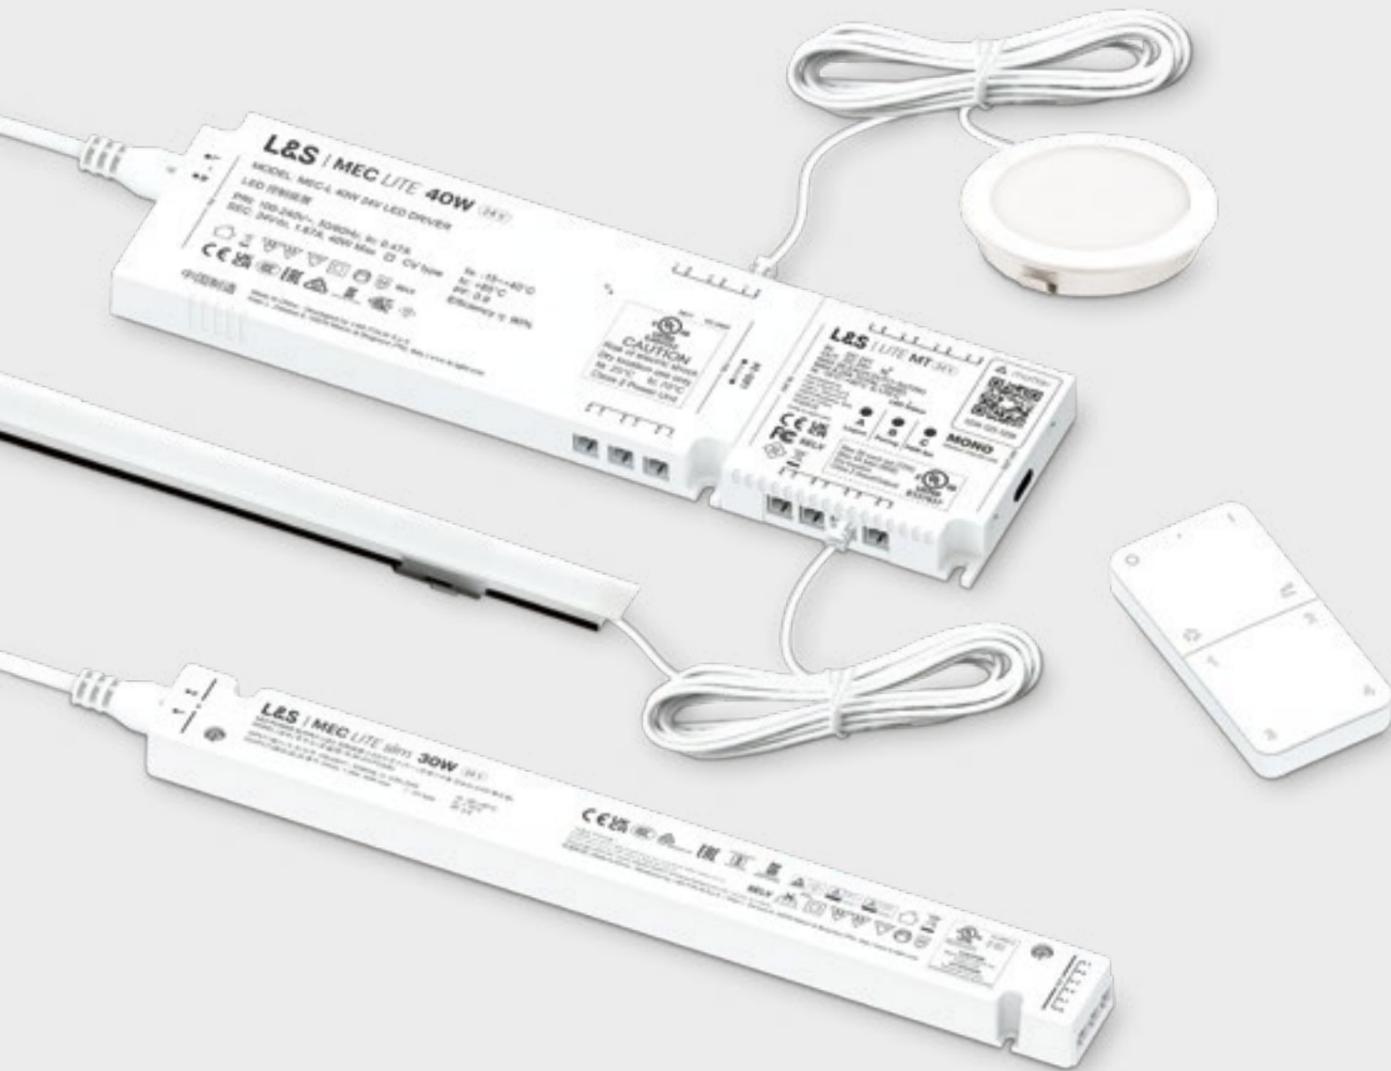

## Practical integrated power distributor


The integrated power distributor of **MEC LITE**, with an optimized number of outputs based on the power supply's capacity, is a practical and easy-to-use solution for quickly connecting LED lamps without additional distribution modules, which can still be used if it becomes necessary to power a larger number of lamps.

## Reduced width for special installations

The new **MEC LITE slim** model, equipped with an integrated 3-output distributor, is thin and versatile, making it ideal for installation in tight spaces. Available exclusively in 24V, it can be connected to the control modules from the L&S power supply range via dedicated cable.


## Control modules: Easier Smart Home

**MEC LITE** features a modular design with new Smart Home solutions for light control via voice assistant or smartphone, allowing for endless customizations in a simple and intuitive manner, thanks to the integration of the main protocols in the control modules. **LITE MT**, the module based on the Matter protocol, connects directly to the native app of the most popular Smart Home devices (eliminating the issue of managing different apps and protocols). The Bluetooth module **LITE BT** provides simple and immediate light management at your smartphone's fingertips; the **Zigbee** Module ensures quick and precise lighting control in a reliable low-energy consumption mesh network. The **LITE DL** and **LITE CS** modules, based on DALI and CASAMBI protocol, allow for advanced and more professional control

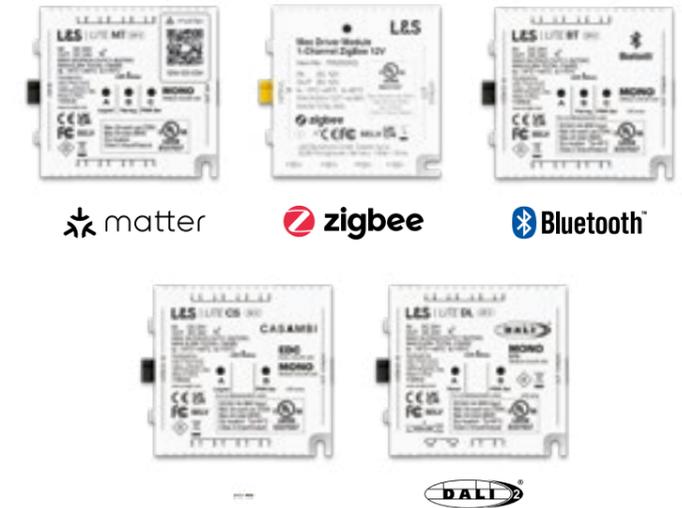

## Wireless control, practical and elegant

The new radio frequency transmitters make light management easy and incredibly versatile. **LITE sensor** is an innovative all-in-one sensor suitable for any context, usable as a motion sensor, door contact sensor, or touch transmitter. **LITE remote** is a practical 4-channel transmitter that allows control of multiple **LITE** control modules and can be installed on the wall using a practical magnetic support.

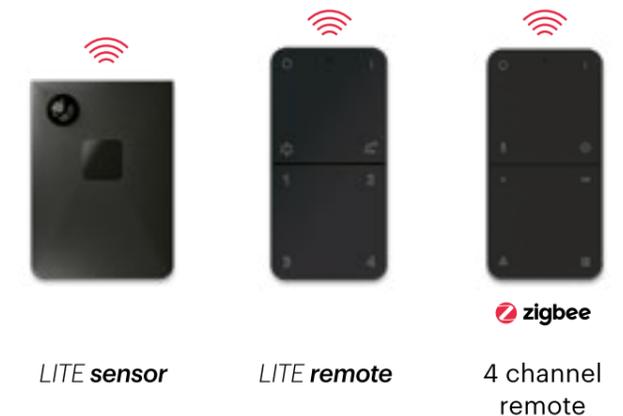

## Multi-certified for global use

**MEC LITE** meets all major quality and safety requirements imposed by various global regulatory standards. The certifications obtained, together with the Wide Input system of 100-240 V AC and a separate power cable that can be chosen based on the type of plug used, make **MEC LITE** a global, safe, and reliable product.




DRIVERS AND CONTROLS

# Smart Control

## CASAMBI


### Complete wireless system: fewer cables, greater control

Casambi offers an open, accessible, and usable technology platform, bringing wireless control capabilities to various lighting devices. Casambi's comprehensive wireless solution opens up endless possibilities for every type of project, from residential to retail and hospitality. The system is based on Bluetooth Low Energy, requires no additional wiring, and allows you to manage individual fixtures or entire lighting networks with superior reliability and stability. Thanks to its dedicated app and advanced features—lighting scenarios, programming, and dynamic adjustments—Casambi offers the ideal level of lighting control, ideal for those designing scalable, quality-certified solutions.

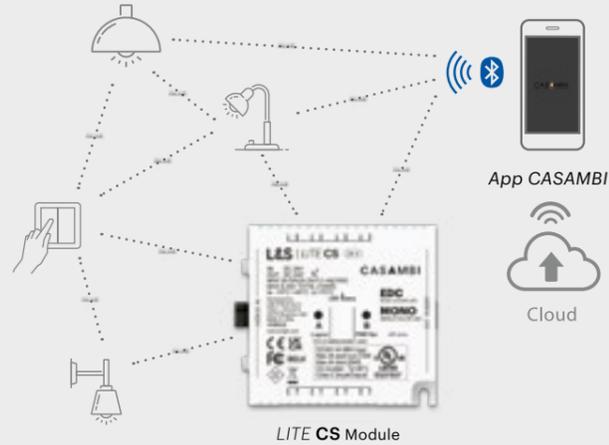


### International wired standard for lighting control

The DALI (Digital Addressable Lighting Interface) protocol is the reference technology for the intelligent management of lighting fixtures in architectural and technical settings. It ensures reliable communication between devices from different manufacturers, with individual or group control of lamps and advanced functions such as dimming and lighting scenarios. Integration into building automation systems is simple and secure, with a standardized configuration and two-wire wiring that reduces costs and complexity. DALI enables precise, flexible, and efficient lighting management, suitable for professional projects, ensuring reliability and customization.

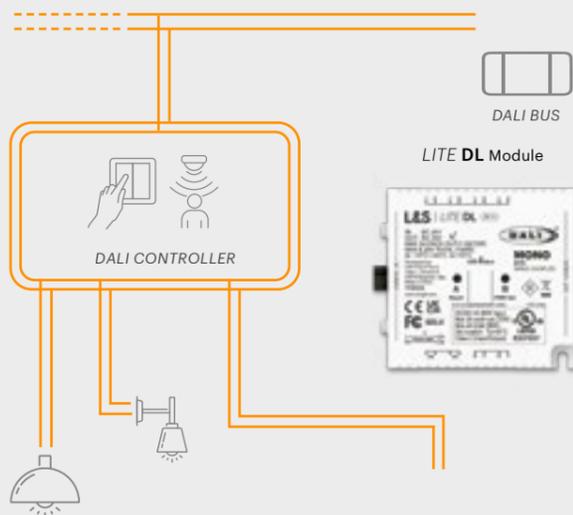


### The universal standard for Smart Home devices

It simplifies the connection between smart devices from different brands through the innovative, fast, and reliable Matter protocol: the **LiteMT control module connects directly to the native app of Smart Home devices** (e.g., Amazon Alexa, SmartThings, Apple HomeKit). Through the Wi-Fi network, the device can be controlled from anywhere in the house. Control and customization of lighting through **voice assistants and smartphones**: intuitive and suitable even for non-expert users, thanks to an easy and immediate setup process that involves simply scanning the QR code present on the module.

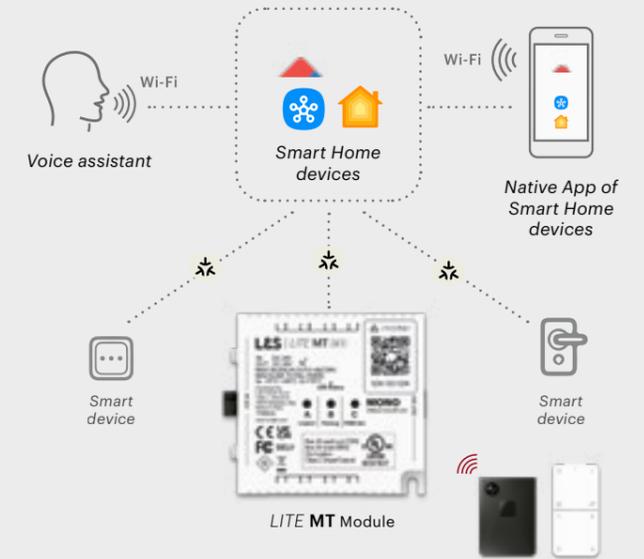

### Low power consumption wireless protocol

With the new ZigBee control module, our lighting devices **communicate with other smart home devices** (e.g., plugs, locks, and smart bulbs) **through a compatible bridge** (e.g., Philips Hue) in a reliable low-energy consumption mesh network. **Quick and precise control of lighting via smartphone** using the native app of the bridge or through voice assistants compatible with the ZigBee 3.0 protocol.

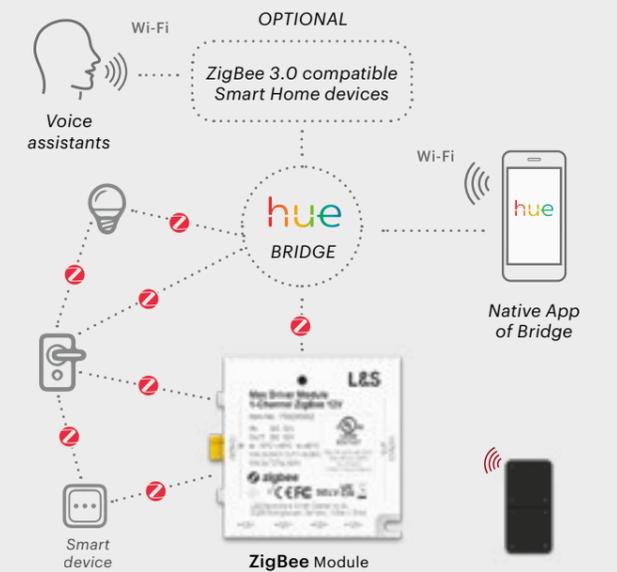

### The solution for smartphones simple and accessible

The most well-known and familiar technology, now with the new LiteBT module, allows for the integration of our devices into the smart management of the home: **through the dedicated app developed by L&S, light management is simple and immediate.** Customized lighting, intensity adjustment, and real-time lighting scenes are just **a tap away on your smartphone.**



DRIVERS AND CONTROLS

# MEC LITE



## LED LIGHTS POWER SUPPLY


V IN: 100-240V AC WIDE INPUT  
V OUT: 24V DC

24V LED power supply system, complete with an integrated power distributor for LED lights (the number of outputs varies based on the power supplied).

Wide Input voltage of 100-240V AC: the 150W model is available exclusively with an input voltage of 240V. Power cable sold separately.

Modular design: Remote control modules can be connected to create endless solutions (ensure the same 24V power supply is maintained for all connected modules).

Compatible with all MEC Driver 24 modules.

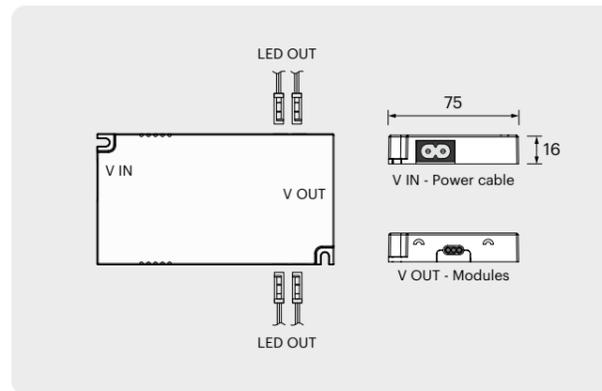

V IN	V OUT	W	OUT	L	CODE
100-240VAC	24V DC	20W	4	135 mm	750800340
		40W	6	190 mm	750800341
		60W	6	190 mm	750800342
		75W	8	240 mm	750800343
		96W	8	240 mm	750800344
220-240V AC		150W	8	240 mm	750800345

## POWER CABLE

V IN: 100-240V  
L= 2000mm  
Choose the power cable according to the type of plug suitable for your target market.  
NOT INCLUDED

PLUG	CODE
EU	940600561
US	940600560
UK	940600557
AU	940600559
CN	940600558
JP	940600585
KR	940600562




## CONTROL MODULES CONNECTION CABLE

V IN/OUT: 24V / 12V DC  
MAX load: 5A

For connecting MEC LITE and MEC Driver power supply systems to Control Modules; suitable also for Module-to-Module connections.

OPTIONAL

L	CODE
100 mm	940600484
500 mm	940600485
1000 mm	940600486

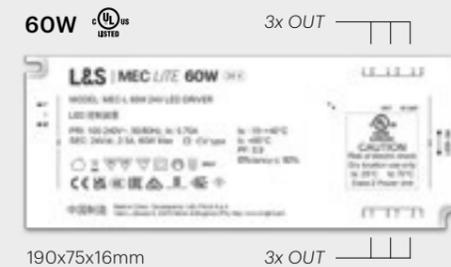

# MEC LITE slim




## LED LIGHTS POWER SUPPLY

V IN: 100-240V AC WIDE INPUT  
V OUT: 24V DC

24V LED power supply system, complete with an integrated 3-way power distributor for LED lights, featuring a reduced width of 30mm.

Wide Input voltage of 100-240V AC: power cable and adapter cable for control modules connection both sold separately. Ensure the same 24V voltage is maintained for all connected modules.

Compatible with all MEC Driver 24 modules.

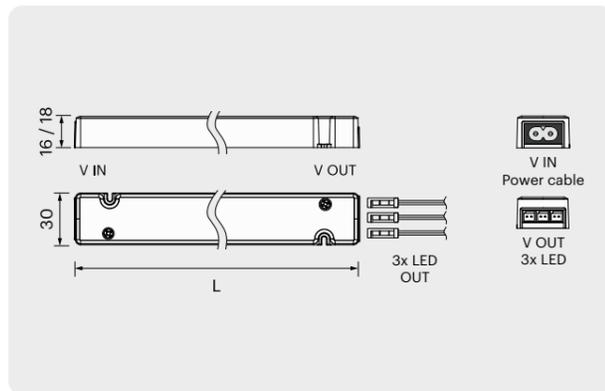

V IN	V OUT	W	OUT	L	CODE
100-240VAC	24V DC	30W	3	288 mm	750800212
		60W	3	320 mm	750800213
		96W	3	320 mm	750800214

## POWER CABLE

V IN: 100-240V  
L= 2000mm  
Choose the power cable according to the type of plug suitable for your target market.  
NOT INCLUDED

PLUG	CODE
EU	940600561
US	940600560
UK	940600557
AU	940600559
CN	940600558
JP	940600585
KR	940600562



## CONTROL MODULES ADAPTER CABLE

V IN/OUT: 24V DC  
MAX load: 5A  
For connecting the MEC LITE slim power supply system to 24V Control Modules.  
OPTIONAL

L	CODE
100 mm	910300031



## CONTROL MODULES CONNECTION CABLE

V IN/OUT: 24V / 12V DC  
MAX load: 5A  
For connecting MEC LITE and MEC Driver power supply systems to Control Modules; suitable also for Module-to-Module connections.  
OPTIONAL

L	CODE
100 mm	940600484
500 mm	940600485
1000 mm	940600486





## 30W cULus LISTED



## 60W cULus LISTED



## 96W cULus LISTED

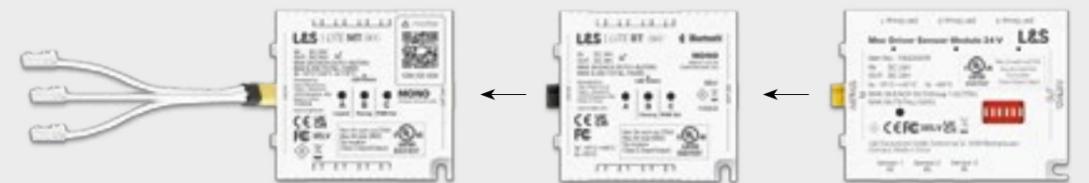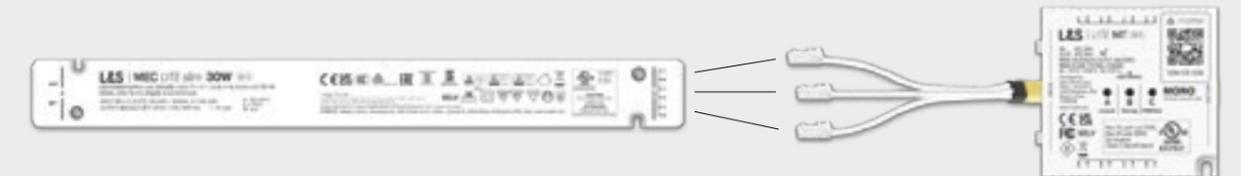

# LITE MT




## CONTROL MODULE FOR LED LAMPS

V IN/OUT: 24V DC  
 2,4GHz Radio frequency receiver - Single Channel. With Matter protocol.  
 Simultaneous control up to 8 LED lights using compatible radio frequency transmitters or via Matter protocol to connect the module to the native app of the Smart Home device in use (e.g., Amazon Alexa, SmartThings, Apple HomeKit) thus eliminating the issue of managing different apps and protocols. Available for MONO or Dual Color (EDC/WDC) LED. Maintain the same operating voltage of 24V for all connected modules in a continuous line.  
 Functions: On-Off, dimming and color temperature adjustment (LED EDC/WDC).



WAYS	MAX LOAD	V IN	LED	CODE
8	150 W Total	24V DC	MONO	<b>756200640</b>
	72 W Single way		EDC / WDC	<b>756200645</b>

For use with lamps without integrated switching system only.

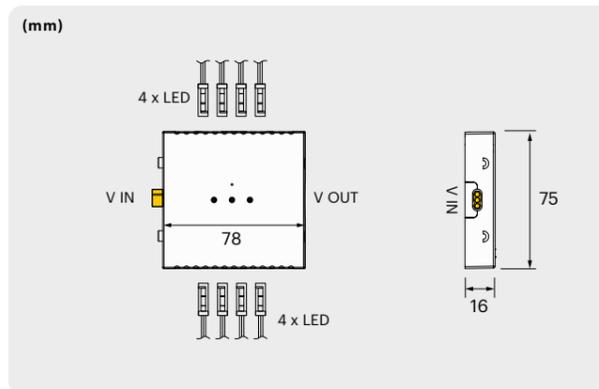

## REMOTE CONTROL



Control via voice assistant or smartphone through the Wi-Fi network: direct connection to the native app of Smart Home devices through a simple scan of the QR code printed on the module.

Control via 2.4GHz radio frequency transmitters.

## COMPATIBLE 2.4GHz TRANSMITTERS

It is possible to pair up to 5 radio transmitters with a single LITE BT receiver module.



# LITE BT




## CONTROL MODULE FOR LED LAMPS

V IN/OUT: 24V DC  
 2,4GHz Radio frequency receiver - Single Channel. Bluetooth compatible.  
 Simultaneous control up to 8 LED lights using compatible radio frequency transmitters or via Bluetooth with a smartphone. Available for MONO or Dual Color (EDC/WDC) LED. Maintain the same operating voltage of 24V for all connected modules in a continuous line.  
 Functions: On-Off, dimming and color temperature adjustment (LED EDC/WDC).



WAYS	MAX LOAD	V IN	LED	CODE
8	150 W Total	24V DC	MONO	<b>756200670</b>
	72 W Single way		EDC / WDC	<b>756200671</b>

For use with lamps without integrated switching system only.

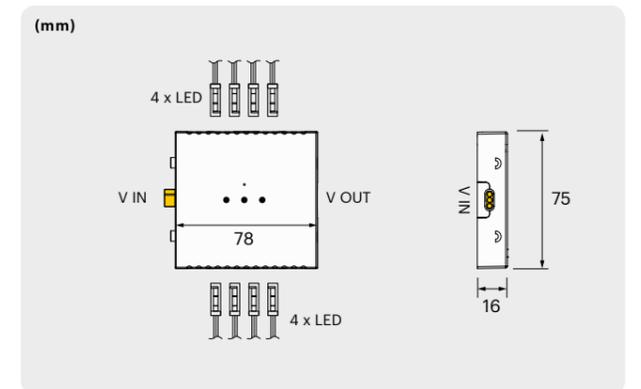

## REMOTE CONTROL



Control via smartphone with the Bluetooth app developed by L&S, available for free download from the App Store and Google Play.

**L&S LITE BT app**

Control via 2.4GHz radio frequency transmitters.

## COMPATIBLE 2.4GHz TRANSMITTERS

It is possible to pair up to 5 radio transmitters with a single LITE BT receiver module.



# LITE sensor



## 2.4GHz RADIO FREQUENCY ALL-IN ONE SENSOR

1 Channel multifunction sensor.

Simultaneously manages all lights connected to compatible LITE control modules. Can be configured for use as:


- PIR Motion Sensor
- IR Door sensor
- TOUCH Transmitter



CHANNELS	CONTROLS	CODE
1	On-Off / Dimmer Color temperature (EDC/WDC)	756200636

**RADIO RANGE:** 15m INDOOR

**BATTERY:** CR2450 - 3V INCLUDED (3 YEARS)

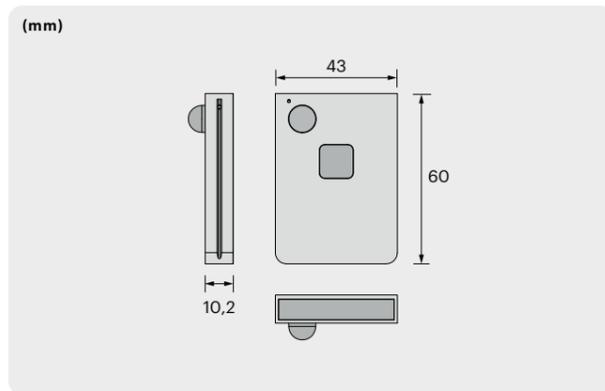


## COMPATIBLE MODULES

It is possible to pair up to 5 radio transmitters with a single receiver module.




- TOUCH**
  - SINGLE PRESS: On/Off.
  - LONG PRESS: Progressive Dimmer.
- Button A**
  - SINGLE PRESS: Operating mode selection: IR (door) / PIR / Touch.
  - LONG PRESS: Compatible Receiver Module pairing.
- Button B**
  - SINGLE PRESS: Auto-OFF Timing setting. IR/PIR: 30s / 60s / 300s.
  - LONG PRESS: Color Temperature adjustments (EDC/WDC Dual Color LED only).
- A + B**
  - LONG PRESS: Receiver Module un pairing.

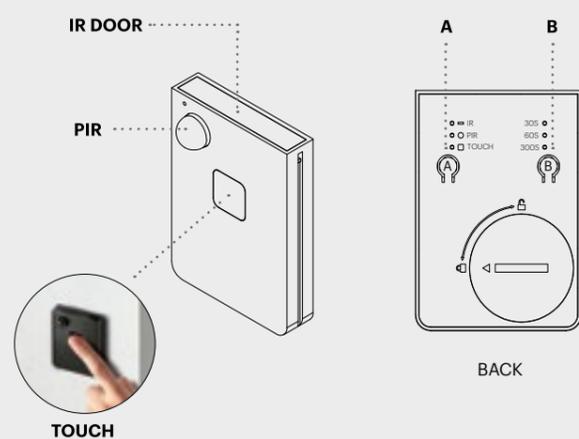



# LITE sensor

## INSTALLATION ACCESSORIES

The Lite sensor can be installed recessed or surface/wall mounted using the dedicated installation accessories included

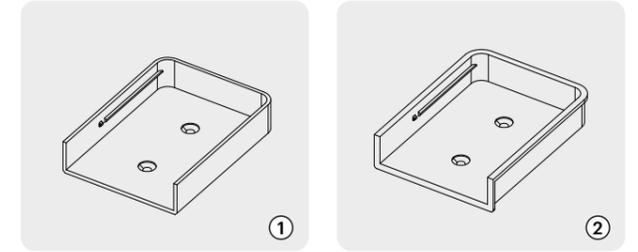

## INSTALLATION OPTIONS

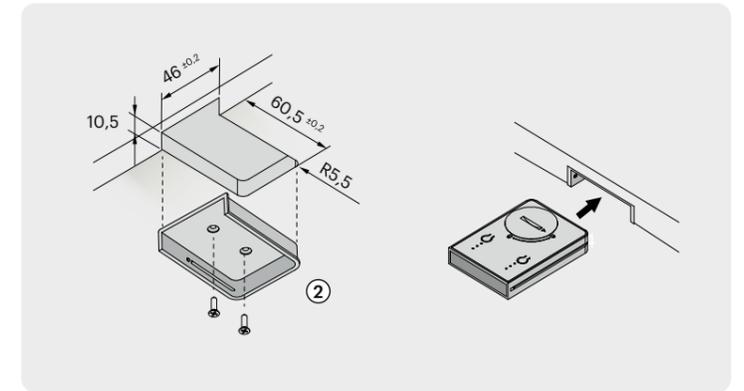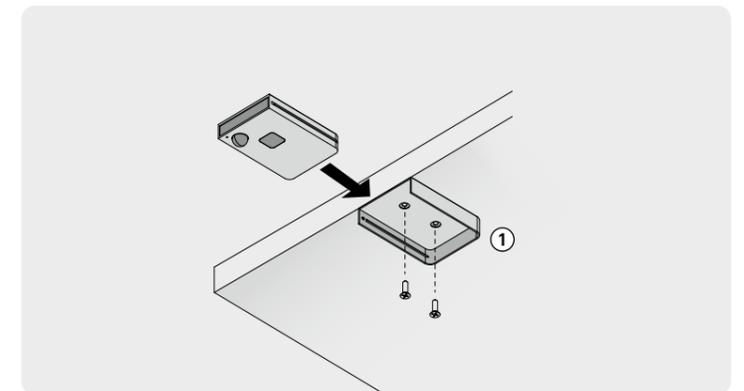

# LITE remote



## 2.4GHz RADIO FREQUENCY TRANSMITTER


4 independent channels.

Individually controls all lamps connected to compatible Smart control modules (up to 6 modules).

CHANNELS	CONTROLS	CODE
4	On-Off / Dimmer Color temperature (EDC/WDC)	01 756200639 02 756200638

**RADIO RANGE:** 15m INDOOR

**BATTERY:** CR2032 - 3V INCLUDED (3 YEARS)



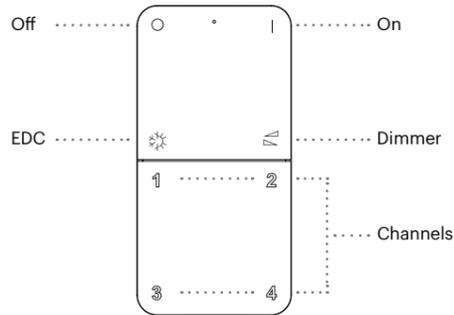


## MAGNETIC WALL SUPPORT

Installation by means of screws or double-sided tape (provided)  
INCLUDED

## COMPATIBLE RECEIVER MODULES

It is possible to pair up to 5 radio transmitters with a single receiver module.

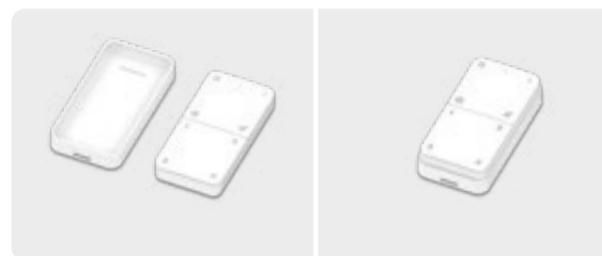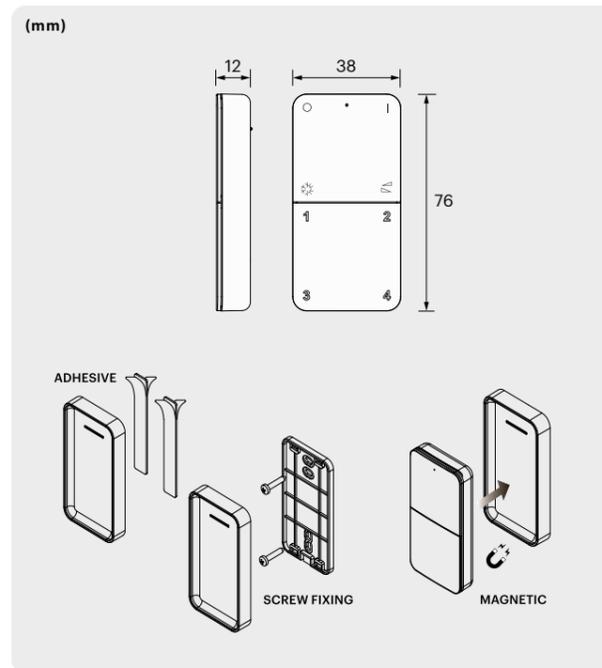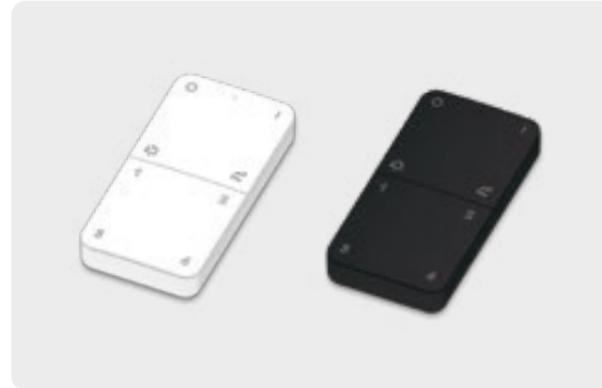

# Zigbee Module 1 channel



## CONTROL MODULE FOR LED LAMPS

V IN/OUT: 24V DC


2,4GHz Radio frequency receiver - Single Channel. With ZigBee protocol.

Simultaneous control of up to 4 LED lamps with compatible radio frequency transmitters, can be used with MONO or Dual Color (EDC/WDC) LEDs (mode setting via on board DIP Switch). The module works with the ZigBee wireless protocol and can be connected with other Smart Home devices in a reliable low-energy consumption mesh network through a compatible Bridge (e.g., Philips Hue - not included). Maintain the same operating voltage of 24V for all connected modules in a continuous line.


Functions: On-Off, dimming and color temperature adjustment (LED EDC/WDC).

WAYS	MAX LOAD	V IN	LED	CODE
4	120 W Total 72 W Single way	24V DC	MONO EDC / WDC	756200028

For use with lamps without integrated switching system only.

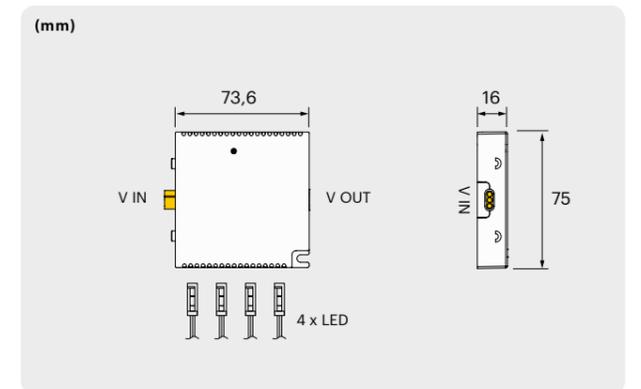

## REMOTE CONTROL

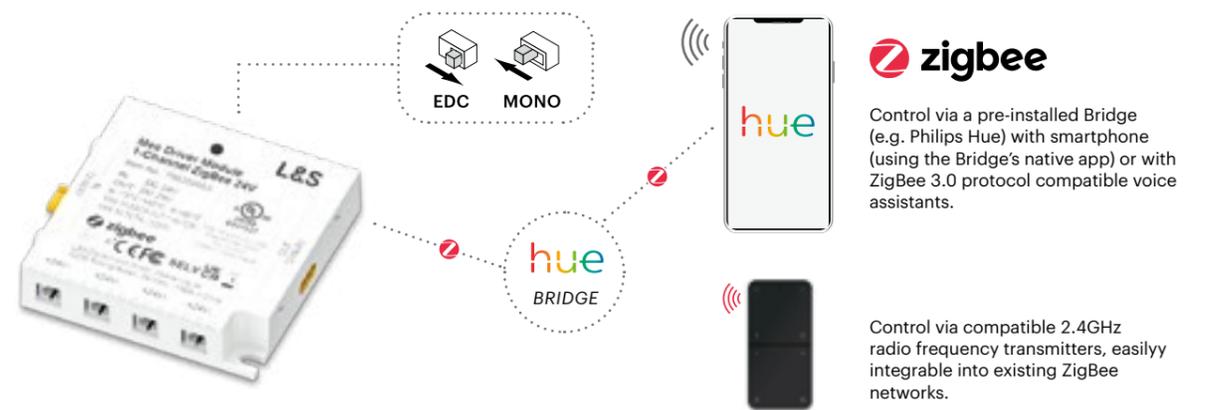

## COMPATIBLE 2.4GHz TRANSMITTERS

It is possible to pair up to 5 radio transmitters with a single ZigBee receiver module.



# Zigbee Module 4 channel




## CONTROL MODULE FOR LED LAMPS

V IN/OUT: 24V DC  
 2,4GHz Radio frequency receiver - 4 Channels.  
 With ZigBee protocol.  
 Individual control of up to 4 LED lamps with compatible radio frequency transmitters, can be used with MONO or EDC/WDC Dual color LEDs (mode setting via on board DIP Switch). The module works with the ZigBee wireless protocol and can be connected with other Smart Home devices in a reliable low-energy consumption mesh network through a compatible Bridge (e.g., Philips Hue - not included). Maintain the same operating voltage of 24V for all connected modules in a continuous line.  
 Functions: On-Off, dimming and color temperature adjustment (LED EDC/WDC).




WAYS	MAX LOAD	V IN	LED	CODE
4	120 W Total 72 W Single way	24V DC	MONO EDC / WDC	756200031

For use with lamps without integrated switching system only.

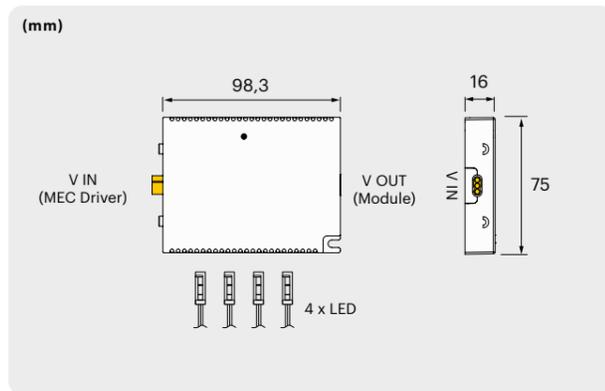

## REMOTE CONTROL

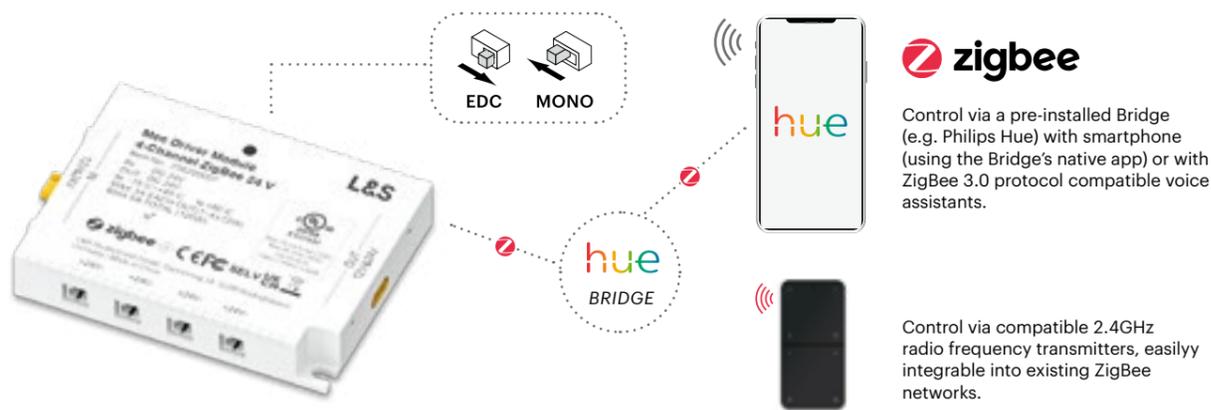

## COMPATIBLE 2.4GHZ TRANSMITTERS

It is possible to pair up to 5 radio transmitters with a single ZigBee receiver module.



# 4 channel remote




## 2.4GHZ RADIO FREQUENCY TRANSMITTER

4 independent channels.  
 Compatible for integration in ZigBee networks.  
 Compatible with 1-channel ZigBee control modules (individual control of multiple modules paired on transmitter's channels) or 4-channel ZigBee control modules (individual control of the lamps connected to the module). It is possible to pair up to 6 compatible modules with each transmitter.



CHANNELS	CONTROLS	CODE
4	On-Off / Dimmer Color temperature (EDC/WDC)	03 756200040

RADIO RANGE: 15m INDOOR  
 BATTERY: CR2032 - 3V INCLUDED (3 YEARS)

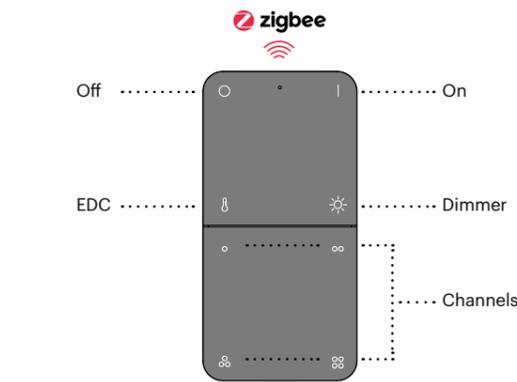


## MAGNETIC WALL SUPPORT

Installation by means of screws or double-sided tape (provided)  
 INCLUDED

## COMPATIBLE RECEIVER MODULES

It is possible to pair up to 5 radio transmitters with a single receiver module.

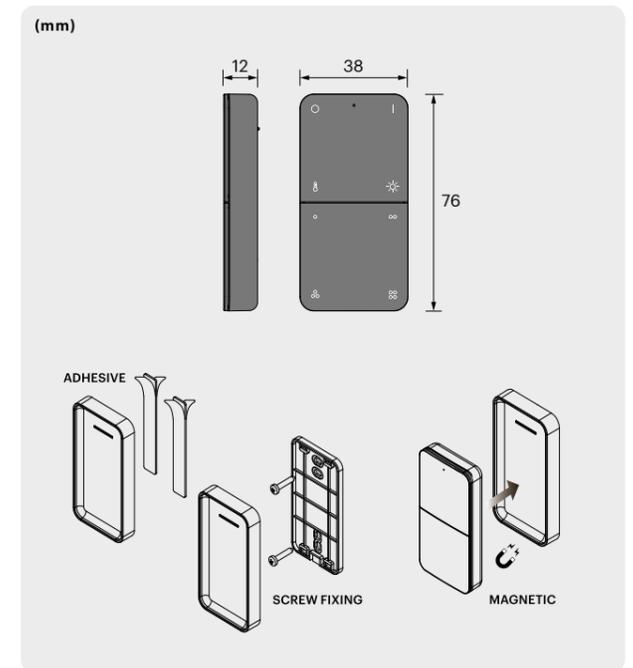

# Sensor Module




## CONTROL MODULE FOR LED LAMPS

V IN/OUT: (24 V) DC

2,4GHz Radio frequency receiver - 3 Channels.  
N°3 cabled sensors inputs.

Control module with 3 LED Output Groups (3x2 ways): can be controlled via Cabled Sensors (3 inputs) or Wireless Sensors (3 channels). Using the built-in DIP Switch it is possible to set the switching mode, the color temperature of the connected lamps (LED Dual Color EDC/WDC) and the automatic switch-off timer (for PIR or IR swing door sensors). Maintain the same operating voltage of 24V for all connected modules in a continuous line.

Functions: On-Off, dimming and color temperature adjustment (LED EDC/WDC).

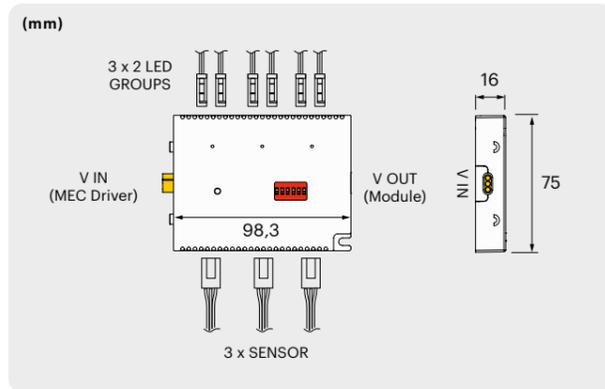

WAYS	MAX LOAD	V IN	LED	CODE
3x2*	120 W Total 72 W Single way	24V DC	MONO EDC / WDC	<b>756200033</b>

\* Each group of 2 LED outputs (3 groups total) is associated with a specific Wireless channel and a specific input for cabled sensors

For use with lamps without integrated switching system only.

## COMPATIBLE 2.4GHZ TRANSMITTERS

NOT INCLUDED



## COMPATIBLE CABLED SENSORS

NOT INCLUDED



# Sensor Module

## SWITCHING MODES

### GROUP SWITCHING


Each group of LED outputs is controlled by the corresponding sensor / switch.

### OR SWITCHING

For PIR or IR Door sensors: all LED outputs are switched together, regardless of the sensor activated. If more than one sensor is activated, the connected LED devices will remain on: all sensors must be deactivated to switch the devices off.


### CROSS SWITCHING

Each sensor / switch controls all connected LED devices simultaneously.

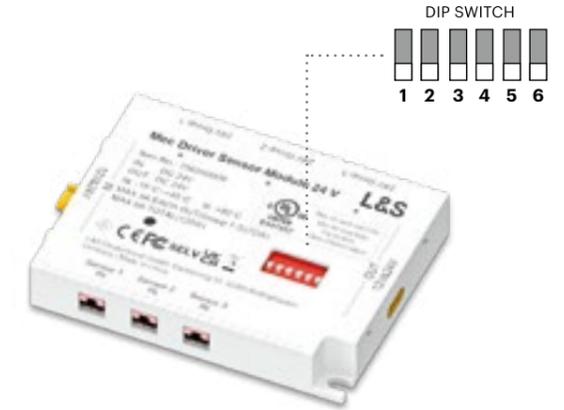

## DIP SWITCH SETTINGS

### SWITCHING MODE SELECTION

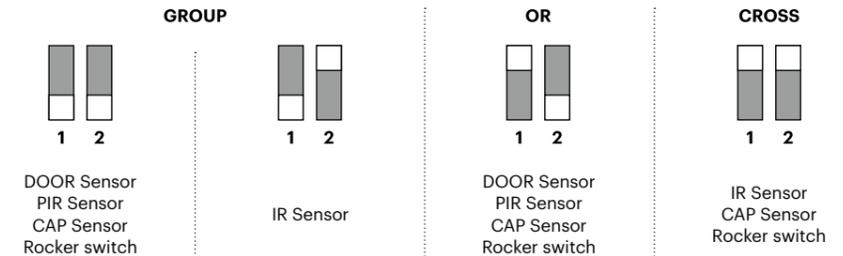

### COLOR TEMPERATURE OF CONNECTED LAMPS

Can only be used with Dual Color EDC/WDC LEDs.



### PIR SENSORS: SWITCH-OFF TIMER SETTING

Time is calculated from the last sensor detection.



### IR DOOR SENSORS: SWITCH-OFF TIMER SETTING


The time is calculated from the last door opening.



# Sensor Module


WIRELESS SENSORS 2.4GHz

(mm)

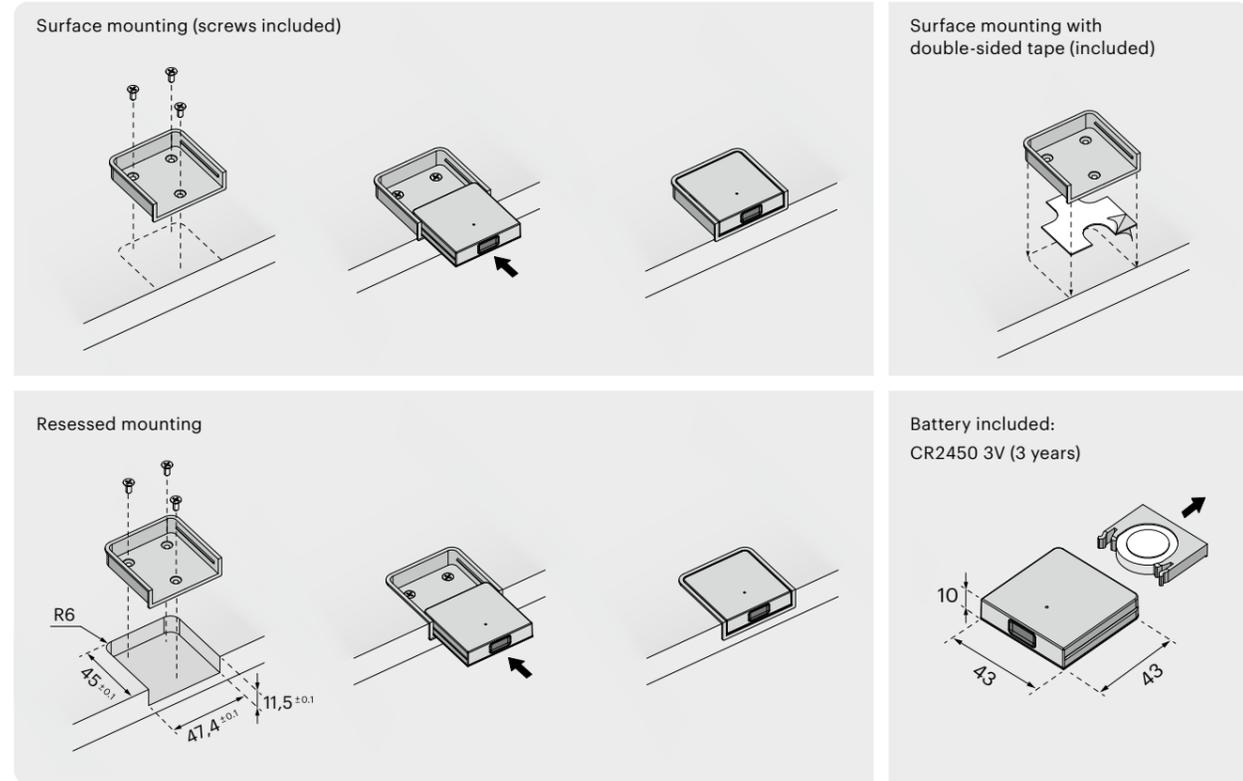


**IR DOOR**

Wireless battery operated Door Sensor (ON-OFF).  
Recessed or surface installation with included spacer.  
  
Available in Black or White.  
Dimensions: 43 x 43 x 10mm

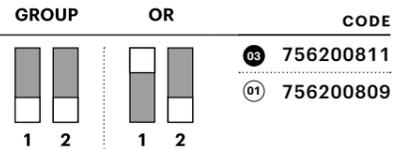


**IR SENSOR**

Wireless battery operated IR Sensor (touch switch)  
Recessed or surface installation with included spacer.  
ON-OFF / Dimmer  
  
Available in Black or White.  
Dimensions: 43 x 43 x 10mm

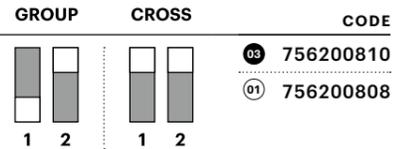

**PIR SENSOR**


Wireless battery operated PIR Motion Sensor (ON-OFF).  
Recessed or surface installation with included spacer  
  
Available in Black or White.  
Dimensions: 43 x 43 x 2 mm

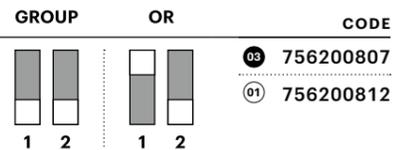

# Sensor Module

CABLED SENSORS - 2000mm

(mm)


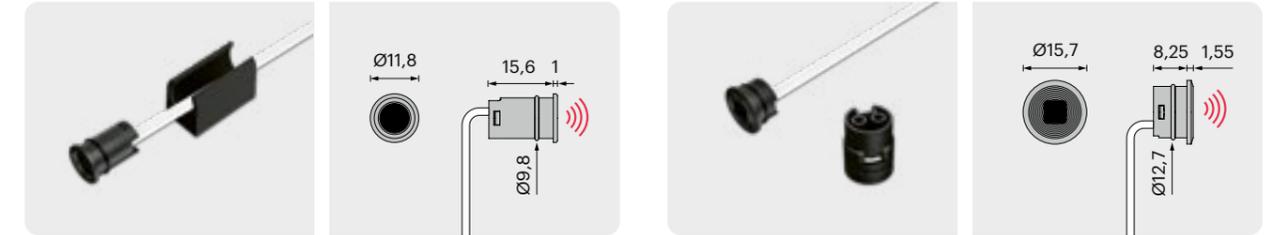


**IR SENSOR / DOOR SENSOR**

Mini cabled Sensor for recessed or surface installation with spacer (sold separately). Can be used as:  
- IR Door Sensor (ON-OFF)  
- IR Sensor (touch switch, ON-OFF / Dimmer)  
Hole: Ø10mm / Range: 50mm max

**PIR SENSOR**

Mini cabled Motion Sensor (ON-OFF) for recessed installation.  
Surface installation with swiveling spacer (sold separately).  
Hole: Ø13mm  
Distance / Detection angle: 3000mm max. / 70

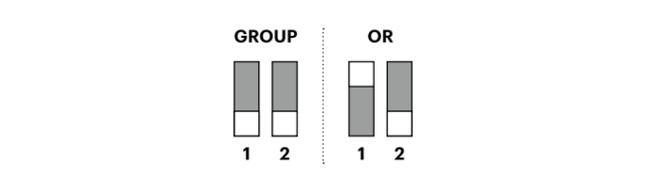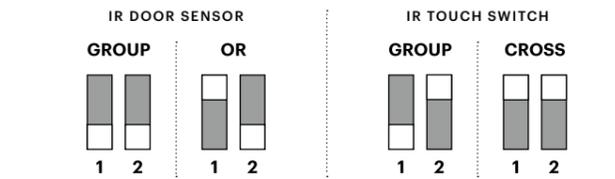


	CODE
IR / DOOR Sensor (2000mm cable)	941300049
Spacer	943900004

	CODE
PIR Sensor (2000mm cable)	941300050
Spacer	943900005






**CAP SENSOR**

Cabled touch pad for hidden installation behind wooden, glass or ceramic surfaces (e.g. under kitchen countertop). Installation by screws or double-sided tape (included).  
Dimensions: 35,2 x 35,2 x 7,5 mm  
Maximum surface thickness: 30 mm max.

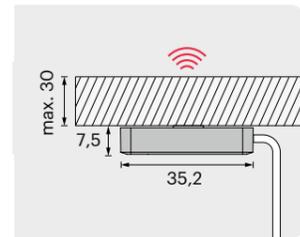

**ROCKER SWITCH**

Mini cabled rocker switch (On/Off) for recessed mounting.  
Hole: Ø14mm

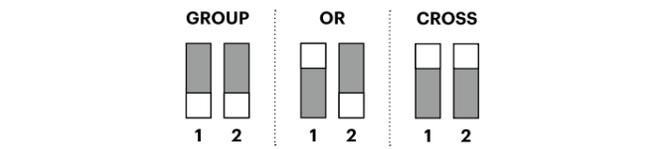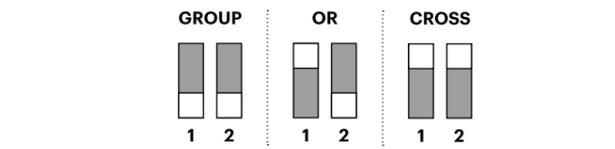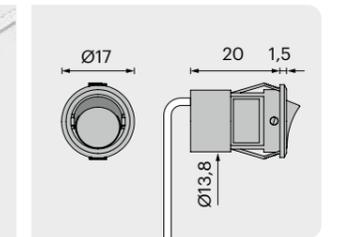

	CODE
CAP Sensor (2000mm cable)	941300051

	CODE
Rocker swicth (2000mm cable)	941300052

# LITE CS




## CONTROL MODULE FOR LED LAMPS

V IN/OUT: 24V DC  
 With Casambi protocol.  
 Simultaneous control of up to 8 LED lamps via Bluetooth with a smartphone, can be used with MONO or EDC/WDC Dual color LEDs (mode setting via App). The module operates on the Casambi wireless protocol, based on the reliable Bluetooth Mesh technology, connected with other Smart Home devices in a reliable low-energy consumption mesh network. Maintain the same 24V operating voltage for all modules connected in a continuous line.  
 Functions: On/Off, adjustment of light intensity and color temperature (EDC/WDC LEDs).




WAYS	MAX LOAD	V IN	LED	CODE
8	150 W Total 72 W Single way	24V DC	MONO EDC / WDC	756200888

For use with lamps without integrated switching system only.

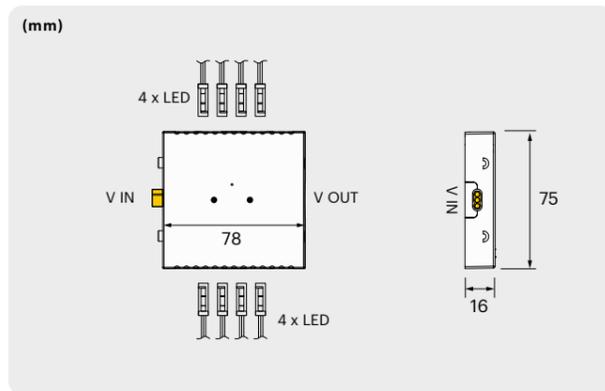

## REMOTE CONTROL

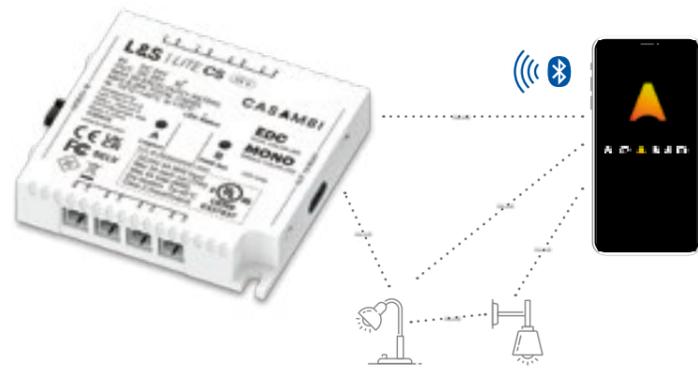

**CASAMBI**  
 Control via smartphone with the Bluetooth app by Casambi, allowing advanced wireless control of lighting and home automation systems (available for free download from the App Store and Google Play).

# LITE DL




## CONTROL MODULE FOR LED LAMPS

V IN/OUT: 24V DC  
 With DALI-2 protocol.  
 Simultaneous control of up to 6 LED lamps via DALI protocol, available for MONO (DALI DT6) or EDC/WDC Dual Color LED (DALI DT8). Certified by the DALI Alliance according to the international DALI-2 standard (Digital Addressable Lighting Interface), ensuring high quality, component interoperability, and compatibility between products from different manufacturers. Maintain the same operating voltage of 24V for all connected modules in a continuous line.  
 Functions: On-Off, dimming and color temperature adjustment (LED EDC/WDC).



WAYS	MAX LOAD	V IN	LED	CODE
6	150 W Total 72 W Single way	24V DC	MONO EDC / WDC	756200889 756200890

For use with lamps without integrated switching system only.

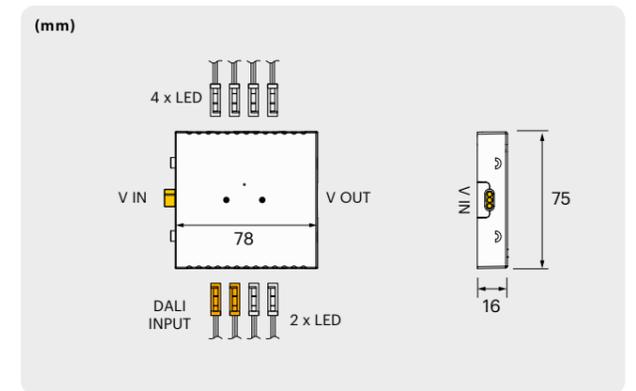

## REMOTE CONTROL



**DALI 2**  
 MONO LED: DALI DT6  
 EDC/WDC Dual color LED: DALI DT8  
 LITE DL enables more advanced lighting control, including dimming and color temperature adjustment, allowing for more flexible management of lights and environments, compatible with different configuration needs.  
 It can also be controlled by a simple normally open (push) button to adjust the intensity of the LED lights, offering dual control modes: digital and manual.

# Wired C



## CONTROL MODULE FOR 24V LED LIGHTS

V IN/OUT: (24 V) DC

N°2 cabled sensors inputs

Up to 4 lamps (LED MONO) simultaneous control; compatible with cabled IR, PIR and TOUCH sensors, sold separately (max. 2 sensors per module - Sensors are supplied as standard with 700mm cable, 3000mm cable sold separately). Maintain the same operating voltage of 24V for all connected modules in a continuous line.



Functions: On-Off / Dimming.



WAYS	MAX LOAD	V IN	LED	CODE
4	120 W Total 72 W Single way	24V DC	MONO	756200895

For use with lamps without integrated switching system only.


EXTRA SENSOR CABLE	CODE
3000mm	940602227

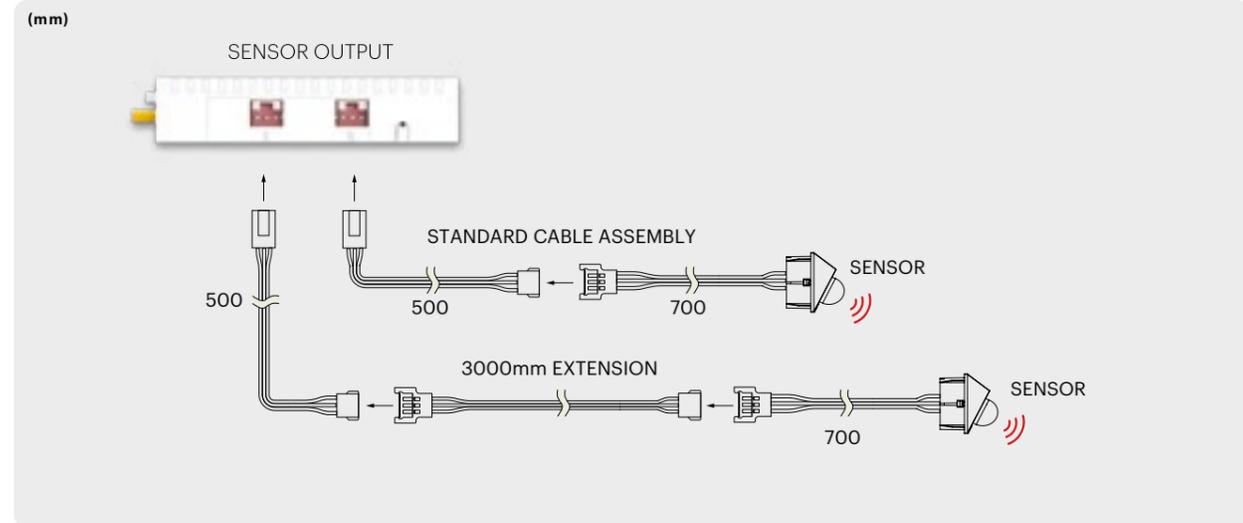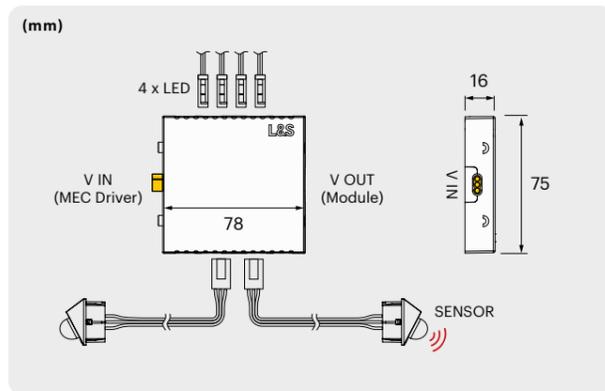


# Wired C

## CABLED SENSORS


**IR DOOR WEDGE** **CODE**  
**941300700**  
Handy, small-sized door contact sensor for surface mounting; its 2 IR detectors on board make it ideal for two-door cabinets.  
Cable hole: Ø8mm

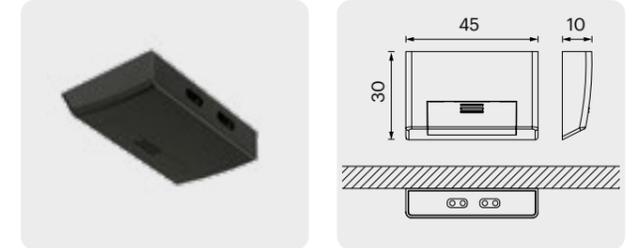


**PIR SENSOR** **CODE**  
**941300701**  
Motion sensor for recessed mounting.  
Switch-off time (16 or 180 seconds, starting from last detection) selectable on the WIRED-C module. Memory of setting also in case of a power failure.  
Hole: Ø20mm

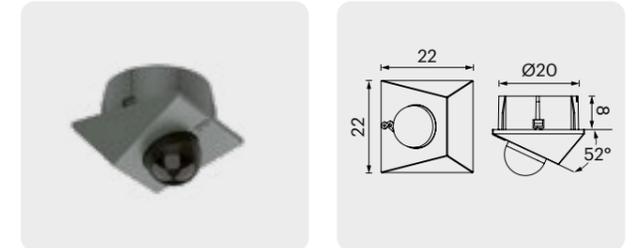

**TOUCH SENSOR** **CODE**  
**941300702**  
Touch switch for recessed mounting.  
Long touch for a stepless dimming (10%-100%). Memory of setting also in case of a power failure.  
Hole: Ø20mm

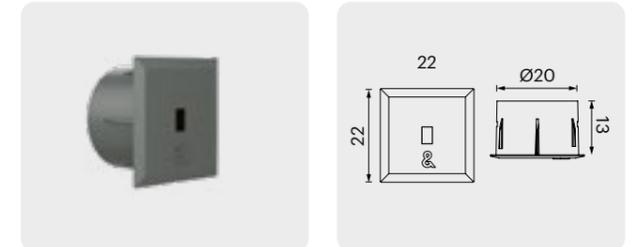

**DOUBLE IR SENSOR** **CODE**  
**941300703**  
Handy, small-sized door contact sensor for recessed mounting; its 2 IR detectors on board make it ideal for two-door cabinets.  
Hole: 27x12mm

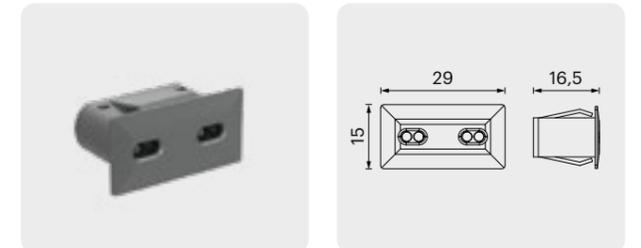















The information present in this catalog may be subject to errors. The articles, their characteristics, data and dimensions found therein are not binding and may be subject to change without prior notice from the company.

---

**HEADQUARTERS**

**L&S GROUP**

Via L. Zanussi, 8  
Maron di Brugnera, PN  
Italy  
+39 0434 616611  
info@ls-light.com  
ls-light.com

**VISPLAY**

Charles-Eames-Str. 2  
79576 Weil am Rhein  
Germany  
+49 07621 986 5800  
info@visplay.com  
visplay.com

**FLUX**

Via Armando Cingolani, 13  
Zona Ind.le P.I.P.  
Sambucheto di Recanati  
62019 Recanati, MC  
Italy  
+39 071 0960086  
sales@fluxitalia.com  
fluxitalia.com

# LIGHT&SPACE

[commercial.ls-light.com](http://commercial.ls-light.com)

